



Innovation Made Better™

## Instruction Manual

### SL-866

THANK YOU FOR PURCHASING THE SL-866 LED WORK LIGHT ON REEL.

SAVE THESE INSTRUCTIONS.

PLEASE READ THESE INSTRUCTIONS BEFORE USING YOUR WORK LIGHT.



**ELECTRICAL RATING - 125 VOLTS 60 HZ**

**CAUTION - TO REDUCE THE RISK OF ELECTRIC SHOCK AND FIRE - PULL PLUG WHEN SERVICING THE CORD REEL.**

#### CAUTION

- DO NOT use this cord reel in explosive atmospheres, near flammable liquids, or where explosion proof lamps are required.
- DO NOT use in the proximity of vehicles or equipment when there is a risk of flammable liquids coming into contact with the hand lamp
- DO NOT immerse in water
- DO NOT use in areas where water can accumulate or in rain or mist
- CAUTION: Risk of Electric Shock – For Light Duty Dry Location Use Only
- GENERAL USE CORD REEL ONLY. NOT FOR HARD USE. FOR INDOOR DRY LOCATION USE ONLY FOR LIGHT DUTY RESIDENTIAL USE ONLY

**WARNING: NOT FOR USE ABOVE HAZARDOUS LOCATIONS**


**CAUTION: DO NOT USE IN HAZARDOUS LOCATIONS AS REQUIRED BY THE CANADIAN ELECTRICAL CODE, PART I**

#### IMPORTANT SAFETY INSTRUCTIONS

- This product has a 3 prong polarized plug on the power cord. Do not attempt to bypass this safety feature by removing the round plug and defeat his safety feature. This plug will fit into a grounded outlet only one way. If the plug does not fit fully into the outlet, contact a qualified electrician. Never use with a two wire extension cord.
- CAUTION: PULL OUT CORD TO FULL LENGTH WHEN USING RECEPTACLE
- CAUTION: DO NOT ALLOW THE CORD TO RETRACT BY ITSELF AS DAMAGE OR INJURY MAY OCCUR FROM EXCESSIVE REWIND SPEED

- CAUTION: Drywall will not hold the weight of the reel assembly
- CAUTION: Read and understand mounting instructions before attempting installation and use of this product

#### MOUNTING

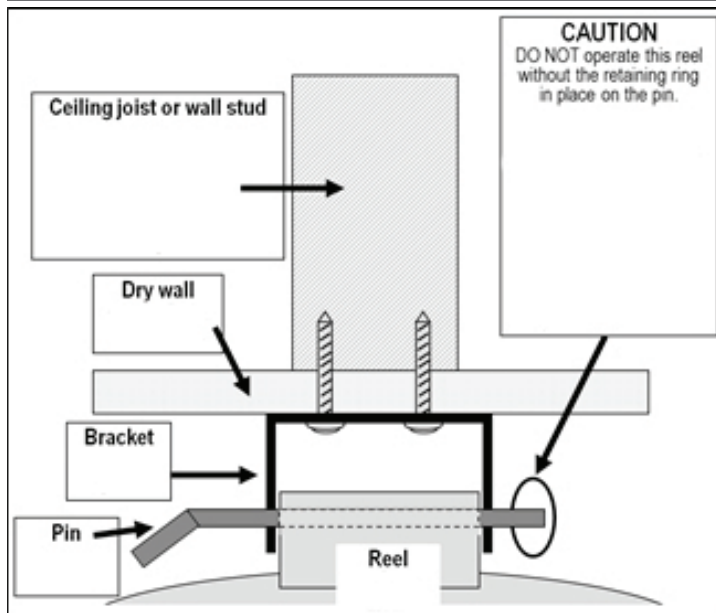

Ceiling or Wall Installation (Image 2)

- Select a location within 18 inches of an electrical outlet. The outlet for a garage door opener is desirable.
- Drywall will not hold the weight of the reel assembly, so locate a ceiling joist or wall stud and using the mounting bracket as a template, mark the holes so they are centered on the ceiling joist or stud.
- Attach the mounting bracket to the stud using the 2 wood screws provided.
- Align the holes on the side of the reel with the holes in the side of the mounting bracket and insert the pin.
- Place the retaining ring on the pin and twist until the entire ring is through the hole in the pin. DO NOT operate this reel without the retaining ring in place on the pin.

#### SAFETY / CARE

##### Reel

- CAUTION: Do not allow the cord to retract by itself as damage or injury may occur from excessive rewind speed.
- Adjust the cord stop to hold the receptacle at the desired length when the cord is retracted.
- Before cleaning the reel always unplug from the power source.
- Clean the outside of the cord reel only. Use a soft cloth with mild detergent. Do not use petroleum based to clean the cord reel. Never immerse the cord reel or receptacles or work lights in water. Dry thoroughly before attempting to reattach to power source.

##### Work Light

- Disconnect the light from the power source
- Wipe with a clean dry soft cloth
- Do not use any solvent or abrasive cleaners

#### OPERATION

##### TURNING THE WORK LIGHT ON/OFF

The work light has a single sealed push button switch used to activate all lighting modes.

##### High-Brightness Floodlight

- Press the Push Button Switch one time.

##### Low-Brightness Floodlight

- Press the Push Button Switch a second time.

##### Turning the Work Light Off

- Pressing the Push Button Switch a third time turns the light off

##### INTEGRATED MAGNETS AND MAGNETIC HOOK

- The work light has two integrated magnets, one in the body of the light and the other at the tip. These magnets will support the weight of the light when magnetically attached to a ferrous metal surface. The removable Magnetic Hook can also be attached to either of the integrated magnets and offers additional hands-free options.

MAGNET AND MAGNETIC HOOK USAGE OPTIONS (IMAGE 3)

