


8892200 Series Surface Mount

To +VDC (fuse @ 1A)..... **WHITE**

To Chassis Ground.....**BLACK**

For Synchronization:.....**BROWN**

Connect **BROWN** wires of all heads together for synchronization (all heads must be set at the same pattern)

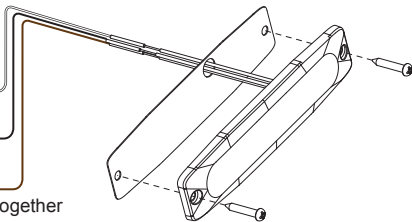

For Simultaneous or Alternating Flash:

1. Apply +VDC to **WHITE** and **BROWN** wires simultaneously to enter Grouping mode; lighthead will display short (single or double) flashes:
 - Single flash = Group1
 - Double flash = Group2
2. Remove **BROWN** wire from +VDC and momentarily apply to +VDC to change Groups:
 - Heads in the same Group flash together.
 - Group1 Heads alternate with Group2 Heads.

For Flash Patterns:

Momentarily apply +VDC to **BROWN** wire:

- Once for next pattern
- Quickly three times for pattern 1

NOTE: This unit may not be factory set at FP#1.

| FP# | Flash Patterns | | |
|-----|---------------------|----|--------------------|
| 1 | Single (2Hz) | 13 | Single H/L (split) |
| 2 | Double (2Hz) | 14 | Single (all) (SAE) |
| 3 | Triple (2Hz) | 15 | Double (all) (SAE) |
| 4 | Quad (2Hz) | 16 | Quad (all) (SAE) |
| 5 | Random | 17 | Quint (all) (SAE) |
| 6 | Single (split) | 18 | Mega (all) |
| 7 | Double (split) | 19 | Ultra (all) (SAE) |
| 8 | Quad (split) | 20 | Single-Quad (all) |
| 9 | Quint (split) | 21 | Single H/L (all) |
| 10 | Mega (split) | 22 | Steady Half |
| 11 | Ultra (split) | 23 | Steady All |
| 12 | Single-Quad (split) | | |

*SPLIT = Left alternate Right

*ALL = Simultaneous