



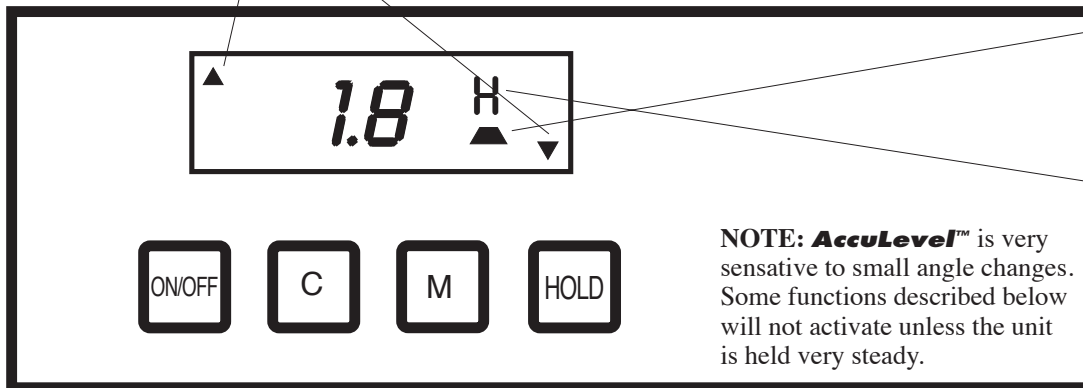

Digital Level Measurement from 0.0° to 90.0°

Pointers on display - ▲ - show direction of tilt.

(If **AccuLevel™** is used for measuring very small angles - under 2° - this feature will tell you which way the tilt is)

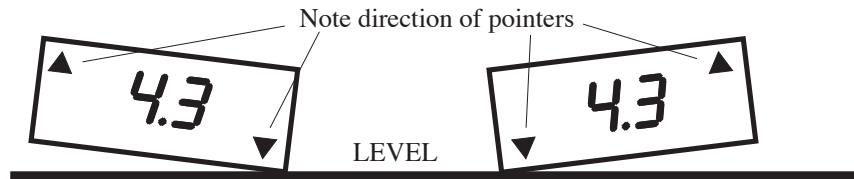

Turn on: Push **ON/OFF**. (see “**M**” button Modes below). **AccuLevel™** shuts off automatically after 10 minutes to save battery life. Batteries should last a year or more in normal use. See back side for battery door. Replace with 2) AAA alkaline batteries.

Zero: **AccuLevel™ 3.5** maintains its zero when shut off and **DOES NOT REQUIRE ZEROING.**

Compare one angle to another: The **C** button is used to compare one angle to another. Place **AccuLevel™** on a surface and push **C**. The display will go to **00.0** and ▲ will disappear. Move to a different surface to compare the difference. Push **C** again to return to normal use.

FOR NORMAL USE ▲ MUST BE ON DISPLAY.

To hold a reading: Push “**HOLD**” and release. The display will show **H** and flash. When **H** stops flashing (approx. 5 sec.) the reading is held on the display. Push “**HOLD**” again to go back to active reading. **NOTE:** **AccuLevel™** MUST be held absolutely steady during this 5 seconds.

To CALIBRATE: Place **AccuLevel™** on a reasonably level surface (does not need to be perfectly level). Turn on, then push **ON/OFF** and **C** at the same time (not necessary to hold both). **-1-** will appear on the display. Now push **ON/OFF** **-1-** will begin to flash and in a few seconds **-2-** will appear. **Turn unit around 180° in the same spot** and push **C** again. **-2-** will begin to flash and in a few seconds normal readings will reappear. Calibration is now complete.

“M” button - to change Modes: Normally **AccuLevel™** displays ° of tilt. It can be set to display “Slope” which is in % (100% slope = 45°). Push **M** to go into this mode and back to ° tilt. Once in either mode **AccuLevel™** will stay there until you change it.

Do not drop the unit. Keep it clean and dry and avoid strong electrical or magnetic fields. Do not push 2 buttons at once. If it will not be used for several months remove batteries.