


Trailer Hitch Wiring & Electrical

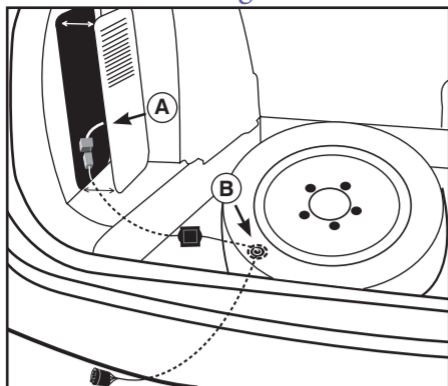

1. Locate vehicle's plug by removing the jack from the jack compartment on the driver's side (A).
2. Apply a small amount of grease to all electrical connections to help prevent corrosion.
3. Plug Wiring Kit into mating vehicle plug. Be sure the connectors are fully inserted with locking tabs in place.
4. Remove the rear trim panel, rear compartment storage cover, load floor and spare tire.
5. Route the rest of the harness under the spare tire and run the 4-wire flat out through the drain plug grommet (B).
6. Plug completed wire harness into the trailer connector.
7. Test all functions with engine running to ensure proper operation.

NOTE:

- Grease applied to the trailer wiring terminals on a regular basis will help prevent corrosion.
- A heavy duty flasher may be required to eliminate rapid flashing.
- Always unplug boat trailer connector before backing trailer into the water.
- Converter load is a maximum of 2.1 amps per stop / turn signal terminal. (One turn signal on each side)