



## LED HEADLIGHT INSTALLATION

### JEEP WRANGLER JK 2007-2017



STEP 1: Open the hood and remove the (6) plastic rivets in the upper grill using a flathead screwdriver.

STEP 2: Disconnect the turn signal wires so that the grill can be removed and set to the side.



STEP 3: Remove the (4) T15 Torx Screws that hold the headlight trim ring bezel and lamp housing in place.

STEP 4: Connect the new LED Headlight to the factory plug  
On Jeep JK use the included headlight flicker free module.




Needed for JK Model Only.



STEP 5: Slide Red Clip to Lock. If you can not squeeze together use a needle nose pliers to slide the clip. Now Reverse Steps 1-3.

# ORACLE LIGHTING

## ORACLE REPLACEMENT LED HEADLIGHT WIRING GUIDE:

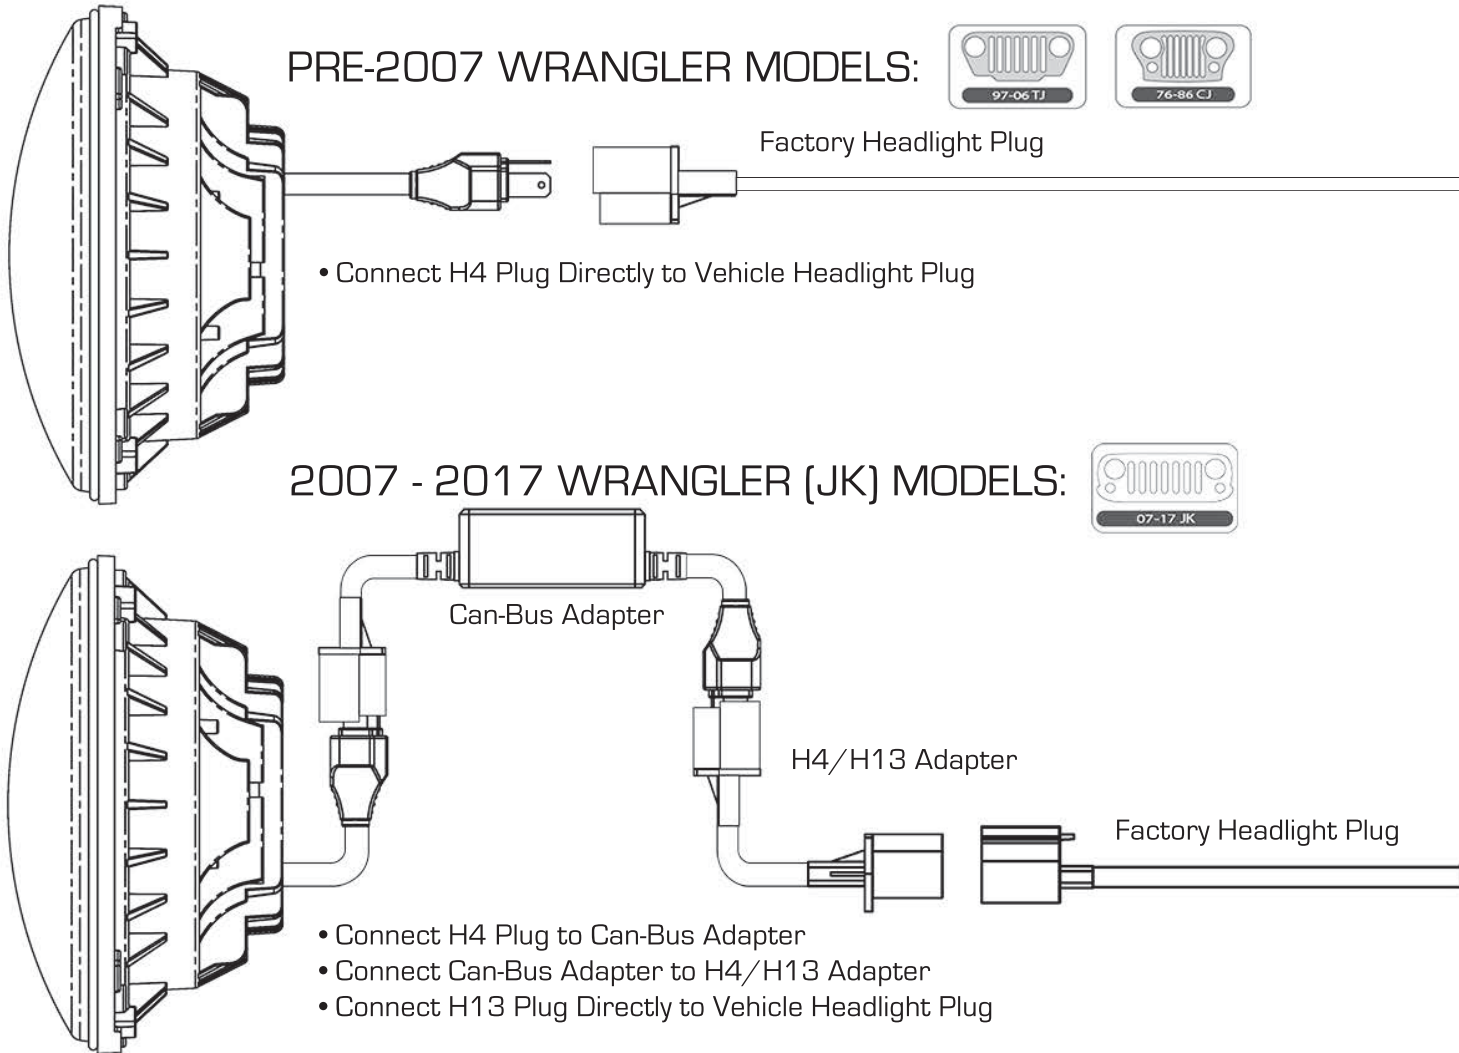

TROUBLE	FAULT	ACTION
Lights work with the engine off but when engine is running the lights flash/ flicker.	Can-Bus Error.	Install or Replace Can-Bus Adapter (2007-2017 JK Wrangler Models).
High Beam projector is not illuminating when vehicle engine is running or off.	Can-Bus Error.	Install or Replace Can-Bus Adapter (2007-2017 JK Wrangler Models).

**IF YOU NEED A REPLACEMENT CAN-BUS ADAPTER PLEASE CONTACT US TO GET THE REPLACEMENT PARTS SENT OUT**  
*If you connect the can-bus adapter and the headlights do not function you do not have a can-bus Jeep and can remove the adapter.*