
REARVIEW MIRROR
7.3" Wide LCD



QUALITY PRODUCTS FOR THE PROFESSIONAL INSTALLER

TABLE OF CONTENTS

INTRODUCTION	3
<i>Contents</i>	
DEVICE	4
INSTALLATION	5
<i>Wiring</i>	
MODE	6
MOUNTING	7
QUICK START	8

INTRODUCTION

Congratulations on your purchase of the Optix “7.3-inch REARVIEW MIRROR”. With rear view mirror installed, you are able to have a great visual of what is behind your vehicle in a 7.3-inch screen. You also get two additional video input for side cameras with trigger wires. The “RVM703A” Rearview Mirror gives you an amazing widescreen display essential for reverse and side cameras.

Contents

- 1- Rear view mirror*
- 1- Hardwire plug*
- 1- Bag with additional accessories.*

DEVICE




Includes:

- 1 Rearview Mirror
- 1 wire harness




NOTE:

Make sure the Mirror has the corresponding mount to your make and model vehicle.

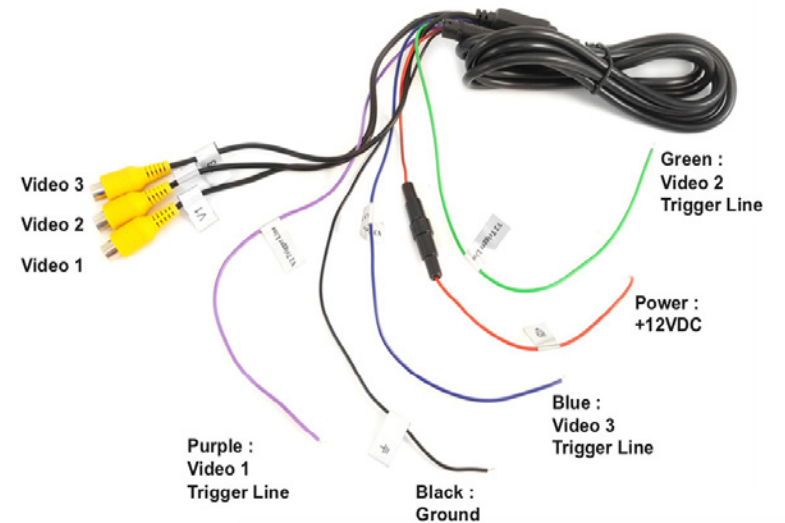

INSTALLATION


1. Determine installation location and verify if mount is compatible. Remove your stock rearview mirror and verify the mount is the appropriate one for your make and model vehicle. If mount is correct, place your new "RVM703A" on the existing glass mount. Run the cables down the pillar like the in the image below.
2. Once Mirror is in Place and the cables have been ran down the pillar, you may now begin the process of running the camera video cables to your 3 video inputs. Attach each trigger to the appropriate

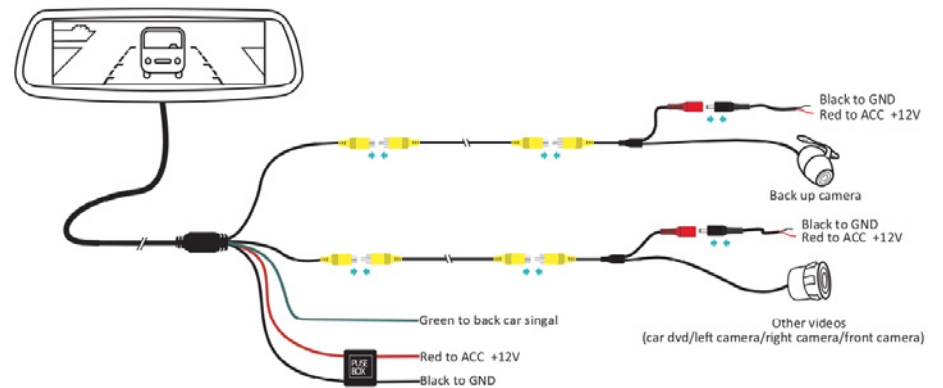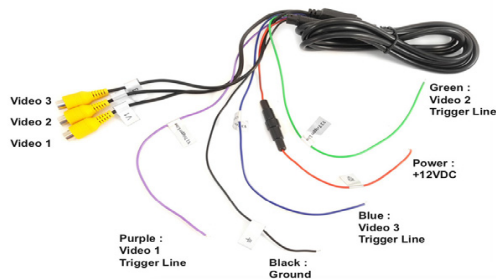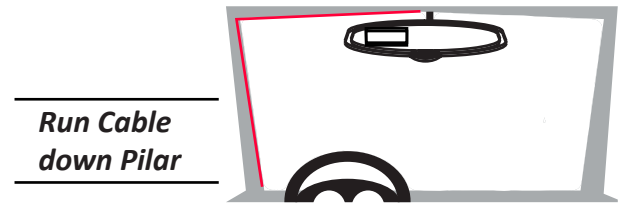

MODE

A fascinating feature included in the "RVM703A" is the capability to view camera 3 (reverse) at all times with the press of a button. The button underneath the mirror will allow you to view behind while driving, ideal for people with horse trailers and other types of trailers.

Press the M for menu on the right glass portion of the mirror and go through settings adjusting to your preference. Screen Brightness, Contrast, Color, Reset.



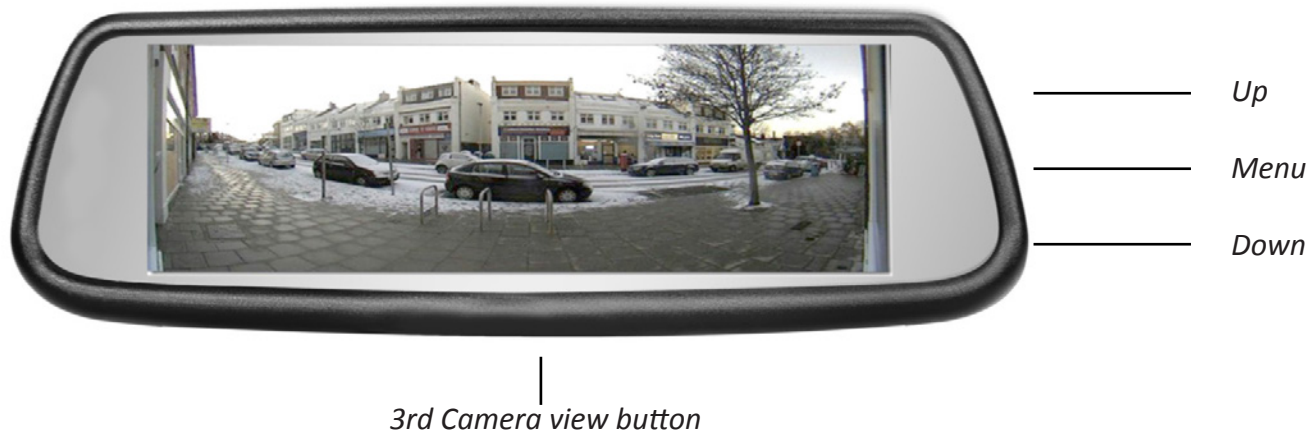


MOUNTING

Different cars have different brackets, make sure your windshield mount matches the mount on the "RVM703A".

Once you have the appropriate mount slide the mirror down on the glass mount and tighten the screw with the tool provided. Do not put heavy force when sliding the mirror on the mount. Failure to do so may cause breaking windshield.

Accele Electronics will not be responsible for damages caused to your car due to improper mirror installation.

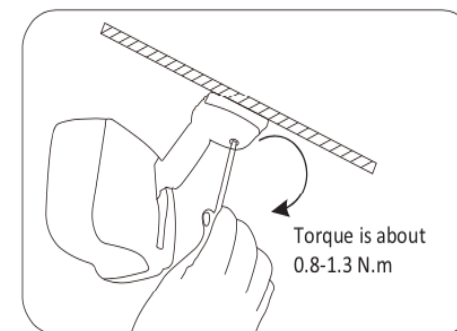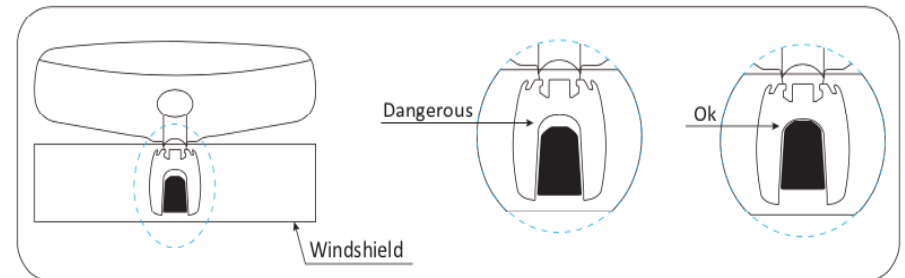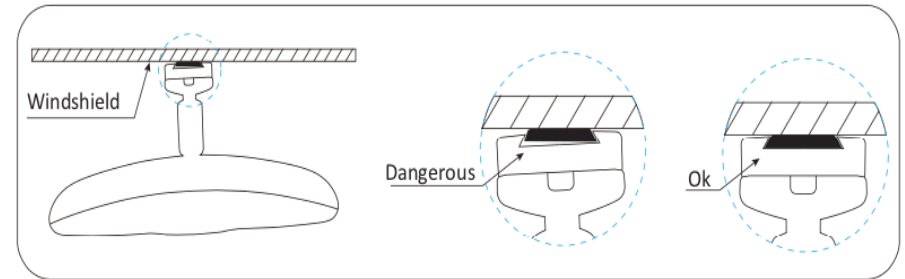

QUICK START

1. Remove old Mirror carefully and Identify if bracket and mount are the same
2. After identifying the correct mount, Slide the Mirror to the mount and tighten to secure its position.
3. Fish out the cables from the headliner and run them down the "A" pillar.
4. Identify where you will be making your connections (ignition, 12V battery constant, ground, Trigger 1, 2, and 3 and run your cables to the desired location).
5. After all connections have been made, adjust the mirror gently to your height/preference.

Accele Electronics will not be responsible for damages caused to your car due to improper mirror installation. Thank you for being a valued customer of ACCELE ELECTRONICS

