

A close-up, low-angle shot of a car's front wheel and tire. The tire is a Goodyear Accelerator, with the tread pattern and brand name visible. The wheel is a multi-spoke alloy design. The background is dark and out of focus.

accelera
SPEED 'N STYLE TIRES

2017 Product Catalog



Ultra-high performance tires designed for speed and style



About Us


Accelera tires are ultra-high performance tires designed for elegance and safety. Accelera tires provide maximum grip, comfort and protection without compromising on style. Developed especially for drivers that care about the role of tire technology in enhancing vehicle performance and safety, Accelera tires provide immense durability, handling, and traction while increasing tread life.

Our Technology: DeltaMax

Manufactured using the DeltaMax technology, Accelera uses a silica compound to achieve excellent grip and overcome aquaplaning forces on wet road. The tires are designed to reduce noise levels and carbon dioxide emissions that significantly minimize rolling resistance to save energy. The double, strong steel belt tied by a cap layer gives a strong grip on uneven road surfaces while remaining stable and during on high speeds. The sidewall is strong and flexible, absorbing shocks on rough surfaces.

DeltaMax insures all aspects of the production process, including product design, are controlled by an automated system, providing a high precision product. The cutting-edge technology is intended to adapt not only to the current trends of auto development but also the future.

Inside an Accelera tire


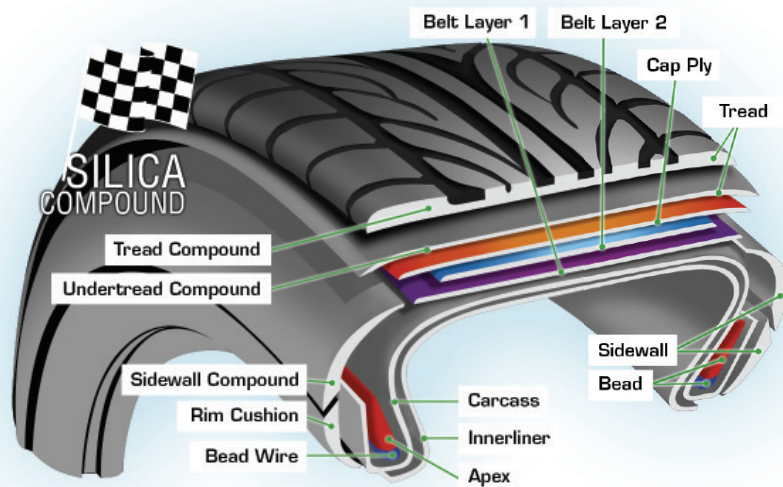


PASSENGER CAR RADIAL

THE ECO-FRIENDLY TIRE

ECO PLUSH

- 1 **Three main ribs**
Provide excellent grip and low noise
- 2 **Main groove and mini diagonal grooves**
Enable rapid water evacuation for improved wet handling and traction
- 3 **Center ribs with adaptive sipes**
Improve rolling and braking, and provide traction while accelerating



Mileage warranty up to: 4 5 0 0 0

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
80 Series	165/80 R13	83T	1071	44	4.5	6.50	23.39	8.9
70 Series	175/70 R13	82H	1045	44	5.0	6.97	22.68	9.3
	165/70 R14	81H	1019	44	5.0	6.69	23.15	9.3
	185/70 R14	88H	1232	44	5.5	7.44	24.25	9.1
	195/70 R14	91H	1353	44	6.0	7.91	24.80	9.3

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
65 Series	155/65 R14	75H	851	44	4.5	6.18	21.97	9.2
	165/65 R14	79T	963	44	5.0	6.69	22.44	9.3
	175/65 R14	82H	1047	44	5.0	6.96	23.00	9.3
	185/65 R14	86H	1166	44	5.5	7.44	23.46	9.7
	175/65 R15	84H	1102	44	5.0	6.96	24.00	9.3
	185/65 R15	88H	1232	44	5.5	7.40	29.65	9.7
	195/65 R15	91H	1353	44	6.0	7.91	25.00	9.4
	205/65 R15	94V	1474	44	6.0	8.23	25.47	8.9
	215/65 R15	100H	1562	44	6.5	8.70	26.02	10.0
	215/65 R16	102V XL	1870	44	6.5	8.70	27.01	9.6
60 Series	185/60 R15	84H	1100	44	5.5	7.44	23.74	9.4
	195/60 R15	88H	1232	44	6.0	7.91	24.21	9.3
	205/60 R15	91V	1353	44	6.0	8.23	24.69	9.7
	225/60 R15	96V	1562	44	6.5	8.98	25.63	9.8
	205/60 R16	96V XL	1562	44	6.0	8.23	25.67	9.8
	215/60 R16	95V	1518	44	6.5	8.70	26.14	10.0
	225/60 ZR16	98W	1650	44	6.5	8.98	26.61	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
70 Series	205/70 R15	96H	Q4 2016
	215/70 R15	98H	Q1 2017
65 Series	205/65 R16	95H	Q4 2016
	215/65 R17	99T	Q1 2017

Series	Size	Load Index / Speed Symbol	Date
60 Series	165/60 R14	75H	Q1 2017
	165/60 R15	77H	Q1 2017
	175/60 R15	81H	Q1 2017
	195/60 R16	89V	Q1 2017

THE IDEAL EVERYDAY TIRE

Phi

- 1

Dynamic medium lateral groove

Provides improved wet handling and rolling resistance
- 2

Shoulder block

Provides better cornering stability and noise reduction
- 3

Straight, medium rib


Improves stability and flexibility on dry road surfaces



1



2



3

Mileage warranty up to: 30000

UTQG400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
60 Series	235/60 ZR16	104WXL	1980	44	7.0	9.45	27.09	9.6
55 Series	205/55 ZR16	94W XL	1474	44	6.5	8.43	24.88	9.6
	235/55 ZR17	103WXL	1925	44	7.5	9.65	27.17	9.4
50 Series	205/50 ZR17	93W XL	1430	44	6.5	8.43	25.12	9.1
	215/50 ZR17	95W XL	1518	44	7.0	8.90	25.51	10.0
	195/45 ZR16	84W XL	1100	44	6.5	7.68	22.91	9.1
	225/45 ZR17	94W XL	1474	44	7.5	8.86	24.96	9.6
	245/45 ZR17	99W XL	1705	44	8.0	9.57	25.67	9.7
	205/45 ZR18	90Y XL	1320	44	7.0	8.11	25.24	9.1
	215/45 ZR18	93W XL	1430	44	7.0	8.39	25.63	9.1
	215/45 ZR18	93Y XL	1430	44	7.0	8.39	25.63	9.1
	225/45 ZR18	95Y XL	1518	44	7.5	8.86	25.94	9.2
	255/45 R18	103Y XL	1925	44	8.5	10.04	27.05	9.1
	245/45 ZR19	102Y XL	1870	44	8.0	9.57	27.68	9.6
	245/45 ZR20	103Y XL	1925	44	8.0	9.57	28.66	9.8



Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
40 Series	195/40 R17	81V XL	1016	44	7.0	7.87	23.15	9.2
	255/40 ZR17	98W XL	1650	44	9.0	10.24	25.04	9.8
	215/40 ZR18	89Y XL	1276	44	7.5	8.58	24.76	9.4
	225/40 ZR18	92Y XL	1166	44	8.0	9.06	25.08	9.8
	235/40 ZR18	95Y XL	1518	44	8.5	9.49	25.39	9.8
	255/40 ZR18	99Y XL	1705	44	9.0	10.24	26.02	9.7
	225/40 ZR19	93Y XL	1430	44	8.0	9.06	26.10	9.6
	235/40 ZR19	96Y XL	1562	44	8.5	9.49	26.42	9.7
	245/40 ZR19	98Y XL	1650	44	8.5	9.76	26.73	10.0
	255/40 ZR19	100Y XL	1760	44	9.0	10.24	27.05	9.7
35 Series	255/35 ZR18	94Y XL	1474	44	9.0	10.24	25.00	10.0
	265/35 ZR18	97Y XL	1606	44	9.5	10.67	25.31	9.8
	215/35 ZR19	85Y XL	1133	44	7.5	8.58	24.92	10.0
	225/35 ZR19	88Y XL	1232	44	8.0	9.06	25.24	10.1
	235/35 ZR19	91Y XL	1353	44	8.5	9.49	25.47	10.0
	245/35 ZR19	93Y XL	1430	44	8.5	9.76	25.79	9.8
	265/35 ZR19	98Y XL	1650	44	9.5	10.67	26.34	10.0
	225/35 ZR20	93Y XL	1430	44	8.0	9.06	26.22	9.6
	235/35 ZR20	92Y XL	1166	44	8.5	9.49	26.46	9.7
	245/35 ZR20	95Y XL	1518	44	8.5	9.76	26.77	9.6
30 Series	245/35 ZR22	97Y XL	1606	44	8.5	9.76	28.78	9.8
	255/30 ZR19	91Y XL	1353	44	9.0	10.24	25.08	10.1
	265/30 ZR19	93Y XL	1430	44	9.5	10.67	25.31	9.8
	225/30 ZR20	85Y XL	1133	50	8.0	9.06	25.35	9.8
	245/30 ZR20	93Y XL	1430	44	8.5	9.76	25.83	9.6
	255/30 ZR20	92Y XL	1166	44	9.0	10.24	26.06	9.4
	255/30 ZR21	95W XL	1518	44	9.0	10.24	27.05	10.1
	255/30 ZR22	95Y XL	1518	44	9.0	10.24	28.07	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
40 Series	245/40 ZR21	100W XL	Q2 2017

UTQG400 A A


THE IDEAL EVERYDAY TIRE

PHIR

- 1 Triple rib
Improves high speed stability and better steering response
- 2 Shoulder blocks
Provide improved cornering and maneuvering stability
- 3 Additional sipes
Allow pattern noise reduction



1



2



3



Mileage warranty up to: 3 0 0 0 0

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
60 Series	205/60 R14	88H	1235	44	6.0	8.22	23.70	9.8
55 Series	195/55 R15	89V XL	1276	44	6.0	7.91	23.43	9.3
	205/55 R15	88V	1232	44	6.5	8.43	23.90	9.4
	195/55 R16	91V XL	1353	44	6.0	7.91	24.41	10.0
	215/55 ZR16	97W XL	1606	44	7.0	8.90	25.28	9.7
	225/55 ZR16	99W XL	1705	44	7.0	9.17	25.75	9.6
	215/55 ZR17	98W XL	1650	44	7.0	8.90	26.30	9.6
	225/55 ZR17	101W XL	1815	44	7.0	9.21	26.77	9.6

UTQG 400 A A								
Series	Size	Load Index / Speed Symbol	Maximum Load lbs	Max. Inflation Pressure psi	Rim Width Inches	Section Width inches	Overall Diameter inches	Tread Depth 32 nds
50 Series	195/50 R15	82V	1045	44	6.0	7.91	22.72	9.7
	205/50 ZR15	89W XL	1276	44	6.5	8.43	23.11	9.6
	185/50 R16	81V	1019	44	6.0	7.63	23.30	9.3
	195/50 R16	84V	1100	44	6.0	7.91	23.70	9.8
	205/50 ZR16	91W XL	1353	44	6.5	8.43	24.09	9.6
	225/50 ZR16	96W XL	1562	44	7.0	9.37	24.88	9.8
	225/50 ZR17	98W XL	1650	44	7.0	9.17	25.91	10.1
	225/50 ZR18	99W XL	1705	44	7.0	9.17	23.74	9.6
45 Series	235/50 ZR18	101Y XL	1815	44	7.5	9.57	27.28	10.1
	195/45 R15	78V	935	44	6.5	7.68	21.93	9.3
	195/45 R16	84W	1100	44	6.5	7.68	22.91	9.8
	205/45 ZR16	87W	1199	44	7.0	8.11	23.23	9.2
	215/45 ZR17	91W XL	1353	44	7.0	8.39	24.72	9.4
	205/45 ZR17	88W XL	1232	44	7.0	8.11	24.25	9.4
	235/45 ZR17	97W XL	1606	44	8.0	9.29	25.35	9.6
	235/45 ZR18	98Y XL	1650	44	8.0	9.29	26.34	9.7
	245/45 ZR18	100Y XL	1760	44	8.0	9.57	26.65	9.8
	225/45 ZR19	96W XL	1653	44	7.5	8.85	27.00	9.7
40 Series	235/45 ZR19	99Y XL	1705	44	8.0	9.29	27.36	9.6
	205/40 ZR17	84W XL	1100	44	7.5	8.35	23.46	9.4
	215/40 ZR17	87W XL	1199	44	7.5	8.58	23.78	9.7
	245/40 ZR17	95W XL	1518	44	8.5	9.76	24.72	10.0
	205/40 ZR18	86Y XL	1166	44	7.5	8.35	24.45	8.9
	245/40 ZR18	97Y XL	1606	44	8.5	9.76	25.71	10.0
35 Series	245/40 ZR20	99Y XL	1705	44	5.5	9.76	27.72	10.0
	185/35 R17	82V XL	1045	44	6.5	7.40	22.10	10.2
	225/35 R18	87Y XL	1199	44	8.0	9.06	24.21	10.0
	245/35 R18	92Y XL	1386	44	8.5	9.76	24.76	10.0
	255/35 ZR19	96Y XL	1562	44	9.0	10.24	26.02	10.1
	245/35 ZR20	95Y XL	1521	44	8.5	9.76	24.76	9.3
	255/35 ZR20	97Y XL	1606	44	9.0	10.24	27.01	10.0

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
55 Series	175/55 R15	77T	Q1 2017
	185/55 R16	83V	Q1 2017
	205/55 ZR17	95W	Q1 2017
50 Series	175/50 R15	75H	Q1 2017
	245/50 ZR18	100W	Q1 2017
45 Series	165/45 ZR16	74W	Q2 2017
40 Series	205/40 R16	83V	Q1 2017
	165/40 ZR17	95W	Q2 2017
35 Series	225/35 ZR17	82W	Q1 2017

THE ULTIMATE TUNING MASTER

Phi 2

- 1 Dynamic medium lateral groove**
Provides improved wet handling and rolling resistance
- 2 Shoulder Block**
Designed to allow better cornering stability and reduced noise
- 3 Straight dry rib**
Ensures stability and flexibility on the road



1



2



3

Mileage warranty up to: 3 0 0 0 0

UTQG

400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
40 Series	275/40 ZR18	103Y XL	1925	44	9.5	10.87	26.69	9.8
	275/40 ZR19	105Y XL	2035	44	9.5	10.94	27.68	9.6
35 Series	275/35 ZR18	99Y XL	1705	44	9.5	10.94	25.55	9.7
	275/35 ZR19	96Y	1562	44	9.5	10.94	26.57	9.7
	285/35 ZR19	103Y XL	1925	44	10.0	11.42	26.89	9.8
30 Series	275/35 ZR20	102Y XL	1870	44	9.5	10.94	27.56	9.3
	275/30 ZR19	96Y XL	1562	44	9.5	10.94	25.55	9.7
	275/30 ZR20	97Y XL	1606	44	9.5	10.94	26.54	9.6
25 Series	285/30 ZR20	99Y XL	1705	44	10.0	11.42	26.77	10.0
	275/25 ZR20	91Y XL	1353	44	10.0	11.14	25.43	9.7
	295/25 ZR21	97W XL	1606	44	10.5	11.85	26.81	10.5

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
30 Series	285/30 R19	98Y	Q1 2017
25 Series	285/25 R20	93W XL	Q1 2017



THE SPORTY TIRE WITH EXCELLENT WET GRIP

ALPHA

- 1 Medium large block with lateral grooves**
Designed with a 45 degree angle to clear water and reduce noise
- 2 Center straight grooves**
Enable rapid water evacuation and overcome hydroplaning for improved wet handling and traction
- 3 Straight, dry center rib**
Allows stability and flexibility on high speeds



1



2



3

UTQG

400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
60 Series	185/60 R13	80V	990	44	5.5	7.44	21.73	9.57
55 Series	185/55 R14	80V	990	44	6.0	7.64	22.05	9.57
45 Series	215/45 R16	90W XL	1320	44	7.0	8.39	23.62	9.95
35 Series	205/35 ZR18	81Y XL	1016	44	7.5	8.35	23.66	9.70



THE R-COMPOUND TIRE WITH INCREDIBLE GRIP

651 SPORT | NEW!

- 1 **Two main ribs**
Provide precise handling
- 2 **Water film breaker**
Provides efficient water draining to overcome aquaplaning risk
- 3 **Three main and directional grooves**
Enable rapid water evacuation for improved wet handling



UTQG 180 AA A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
50 Series	195/50 R15	82V	1045	44	6.0	7.91	22.72	8.6
	195/50 R16	84W	1102	44	6.0	7.91	23.70	8.9
	205/50 R16	87W	1202	44	6.5	8.42	24.09	8.7
45 Series	205/45 R17	84W	1102	44	7.0	8.11	24.09	8.8
	225/45 R17	91W	1353	44	7.5	8.86	24.96	8.8
40 Series	235/40 R18	91W	1353	44	8.5	9.49	25.39	9.7
35 Series	265/35 R18	93W	1430	44	9.5	10.67	25.31	9.3


Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
40 Series	225/40 R18	88Y	Q2 2017

THE SPEEDY MASTER

SIGMA

- 1 **Wider shoulder block**
Improves cornering stability and noise reduction
- 2 **Multi-cone lateral groove**
Enables rapid water evacuation to improve contact on wet surfaces, and maintain low temperatures on dry surfaces
- 3 **V-shaped tread pattern**
Enables stability on high speeds and clears water rapidly to overcome aquaplaning

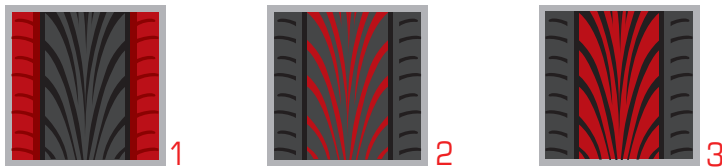

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
35 Series	215/35 ZR18	84W XL	1100	44	7.5	8.60	23.90	9.7

THE AFFORDABLE DIRECTIONAL TIRE

ACCELERA

- 1 Twin straight grooves**
Maintain stability and enable rapid water evacuation to overcome aquaplaning risk
- 2 Center rib**
Provides directional stability and quick steering response
- 3 Unique shoulder blocks**
Provide optimum cornering stability



1



2



3



UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width Inches	Section Width inches	Overall Diameter inches	Tread Depth
			lbs	psi				32 nds
65 Series	175/65 R14	82H	1045	44	5.0	7.00	23.00	9.2

THE VALUE TIRE FOR SMALL MPV'S

GAMMA

- 1 Unique zigzag shoulder blocks**
Enable rapid water evacuation for improved wet handling and traction, while also reducing noise levels
- 2 Dynamic U-block**
Provides excellent grip on both dry and wet surfaces
- 3 Continuous center rib**
Maintains stability and superior handling on straight-line motion



1



2



3




UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width Inches	Section Width inches	Overall Diameter inches	Tread Depth
			lbs	psi				32 nds
65 Series	165/65 R13	77T	906	44	5.0	6.69	21.42	9.6
60 Series	175/60 R13	77H	906	44	5.0	6.97	21.26	9.3
55 Series	165/55 R13	70H	737	44	5.0	6.69	20.16	9.4


THE ECONOMICAL YET COMFORTABLE TIRE

BETA


- 1 **Tough shoulder block**
Provides optimum cornering stability
- 2 **Three wide circumferential grooves**
Maintain stability and superior handling on straight-line motion
- 3 **Dynamic tread grooves**
Enable rapid water evacuation for improved wet handling and traction



1



2



3



UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
55 Series	185/55 R15	86V XL	1166	44.0	6.0	7.6	23.0	10.6

THE DYNAMIC DIRECTIONAL TIRE

EPSILON

- 1 **Triple dynamic block**
Provides excellent stability at high speeds while reducing noise levels
- 2 **Combination of V-shaped and main grooves**
Provide efficient water draining to overcome aquaplaning risk
- 3 **Unique shoulder blocks**
Provide optimum cornering stability



1



2



3



UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
60 Series	185/60 R14	82H	1045	44	5.5	7.44	22.76	10.1




WINTER TIRES


THE STUDLESS WINTER TIRE DESIGNED FOR SAFETY

X-GRIP


- 1 Unique directional tread pattern with cross grooves**
Rapidly clears water to eliminate hydroplaning forces
- 2 Edge blocks with high sipe density**
Provide excellent grip and better traction under snowy and icy conditions
- 3 Continuous center rib**
Enables a self-cleaning function to clean snow from the center groove



1



2



3




Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
65 Series	185/65 R14	86H	1166	44	5.5	7.44	23.46	10.1
	175/65 R14	82T	1045	44	5.0	6.97	22.99	10.1
	185/65 R15	88H	1232	44	5.5	7.44	24.45	10.5
	195/65 R15	91T	1353	44	6.0	7.91	25.00	10.6
	215/65 R16	102H XL	1870	44	6.5	8.70	27.01	11.1
	235/65 R17	108H XL	2200	44	7.0	9.45	28.11	11.1
60 Series	195/60 R15	88H	1232	44	6.0	7.91	24.21	10.1
	195/60 R15	88V	1232	44	6.0	7.91	24.21	10.1
	205/60 R16	96H XL	1562	44	6.0	8.23	25.67	10.7
55 Series	185/55 R15	86H XL	1166	44	6.0	7.64	23.03	10.0
	195/55 R15	89H XL	1276	44	6.0	7.91	23.43	11.5
	195/55 R16	91H XL	1353	44	6.0	7.91	24.41	10.3
	205/55 R16	91H	1353	44	6.5	8.43	24.88	10.6
	215/55 R16	97V XL	1606	44	7.0	8.90	25.28	10.7
	225/55 R16	99V XL	1705	44	7.0	9.17	25.75	11.0
	225/55 R17	101VXL	1815	44	7.0	9.17	26.77	11.2
	215/55 R18	99V XL	1705	44	7.0	8.90	27.28	11.1
	235/55 R18	104VXL	1980	44	7.5	9.65	28.15	11.0
50 Series	225/55 R19	99V	1705	44	7.0	9.17	28.78	11.2
	205/50 R17	93V XL	1430	44	6.5	8.43	25.12	11.1
	225/50 R17	98V XL	1650	44	7.0	9.17	25.91	10.6
45 Series	225/45 R17	94V XL	1474	44	7.5	8.86	24.96	11.1
	225/45 R18	95V XL	1518	44	7.5	8.86	25.94	10.5
	235/45 R18	98V XL	1650	44	8.0	9.29	26.34	11.0
40 Series	225/40 R18	92V XL	1166	44	8.0	9.06	25.08	11.1
	235/40 R18	95V XL	1518	44	8.5	9.49	25.39	11.2
	245/40 R18	97V XL	1606	44	8.5	9.76	25.71	11.0


THE STUDLESS WINTER TIRE DESIGNED FOR SAFETY

X-GRIP N


- 1 Asymmetrical design**
Maximizes performance and offers exceptional grip in snow, wet & dry conditions
- 2 Four longitudinal grooves**
Enable quick evacuation of water & snow along with enhancing traction
- 3 Sinusoidal sipes**
Improve braking & handling performance while preventing sliding on ice & snow



1



2



3



Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
60 Series	185/60 R15	88H	1232	44	5.5	7.36	23.66	9.6
45 Series	205/45 R17	102V XL	1870	44	7.0	8.43	24.29	10.8
	225/45 R19	88V XL	1232	44	7.5	8.90	26.97	11.2



SPORT UTILITY VEHICLE

THE LEADING SUV TIRE FOR WET AND DRY CONDITIONS

iOTA - i

- 1 Wet side pattern with multi grooves**
Enable rapid water evacuation for improved wet handling and traction
- 2 Dry side pattern**
Designed with larger blocks and double grooves to allow superior grip on dry surfaces
- 3 Balance center rib**
Provides better handling stability on wet and dry conditions



UTQG 400 A A


Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi				32 nds
65 Series	225/65 R17	106V XL	2090	50	6.5	8.98	28.50	9.6
	235/65 R17	108V XL	2200	50	7.0	9.45	29.06	9.6
60 Series	215/60 R17	100V XL	1760	50	6.5	8.70	27.17	9.8
	255/60 R17	110V XL	2332	50	7.5	10.24	29.06	10.3
	235/60 R18	107V XL	2145	50	7.0	9.45	29.09	9.7
	255/60 R18	112V XL	2464	50	7.5	10.24	30.04	10.1
	265/60 R18	114V XL	2596	50	8.0	10.71	30.51	10.0

		UTQG		400 A A				
Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
55 Series	215/55 R18	99V XL	1705	50	7.0	8.90	27.28	9.8
	235/55 R18	104V XL	1980	50	7.5	9.65	28.15	9.4
	255/55 R19	111V XL	2398	50	8.5	11.18	30.91	9.8
50 Series	235/50 R19	103V XL	1925	51	7.5	9.65	28.31	10.0
	255/50 R19	107V XL	2145	50	8.0	10.43	29.09	10.3
	255/50 R20	109V XL	2266	50	8.0	10.43	30.08	10.3
	265/50 R20	112V XL	2464	50	8.5	10.91	30.47	10.0
45 Series	275/45 ZR19	108W XL	2200	50	9.0	10.75	28.78	9.8
	285/45 R19	111V XL	2398	50	9.5	11.22	29.09	9.3
	255/45 R20	105V XL	2035	50	8.5	10.04	29.06	10.3
	275/45 R20	112V XL	2464	50	9.0	10.75	29.76	10.1
40 Series	275/40 ZR20	106Y XL	2090	50	9.5	10.94	28.66	10.2
	265/40 R22	106V XL	2090	50	9.5	10.67	30.35	10.0
35 Series	315/35 ZR20	110W XL	2332	50	11.0	12.60	28.66	10.1
	295/35 ZR21	107W XL	2145	50	10.5	11.85	29.09	10.0
	295/35 ZR21	107Y XL	2145	50	10.5	11.85	29.09	10.0
30 Series	295/30 ZR22	103Y XL	1925	44	10.5	11.85	29.02	9.8

THE LEADING SUV TIRE

iOTA - ST68

- 1 Main grooves**
Clear water from surface area in contact with the road to prevent aquaplaning
- 2 Three interlocked block lanes**
Provide directional stability and quick steering response
- 3 Exclamation sipes**
Break thin layering of water to prevent aquaplaning and maintain traction in wet weather conditions



1



2



3



Mileage warranty up to: 3 5 0 0 0

		UTQG		400 A A				
Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
70 Series	265/70 R16	116H XL	2750	51	8.0	10.71	30.63	9.8
65 Series	265/65 R17	116H XL	2398	51	8.0	10.71	30.55	10.0
60 Series	235/60 R17	102H	1874	51	7.0	9.44	28.11	9.6
	275/60 R20	115V XL	2673	51	8.0	10.98	32.99	10.0
55 Series	235/55 R18	104V XL	1984	51	7.5	9.64	28.14	9.8
	255/55 R18	109V XL	2266	51	8.0	10.43	29.02	10.0
	245/55 ZR19	103Y	1925	51	7.5	9.96	29.65	9.7
	275/55 R20	117V XL	2827	51	8.5	11.10	31.57	11.1

UTQG 400 A A								
Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
50 Series	245/50 ZR20	102Y	1870	51	7.5	9.45	27.09	9.8
	285/50 R20	116V XL	2750	51	9.0	11.69	31.26	10.0
	275/50 R22	111V XL	2398	51	8.5	11.18	32.87	10.5
45 Series	255/45 R20	105V XL	2039	51	8.5	10.00	29.05	9.8
	265/45 ZR20	104Y	1980	50	9.0	10.47	29.37	10.2
	275/45 R20	110V XL	2337	51	9.0	10.74	29.76	10.6
	285/45 R20	112Y XL	2469	51	9.5	11.22	30.07	9.8
	275/45 ZR21	110W XL	2332	51	9.0	10.67	30.67	10.6
	285/45 ZR21	109W XL	2266	51	9.5	11.30	31.10	10.6
	275/45 ZR22	112W XL	2464	51	9.0	10.67	31.77	10.1
40 Series	265/40 R20	104V XL	1980	51	9.5	10.67	28.35	9.8
	265/40 ZR21	105V XL	2039	51	9.5	10.67	29.33	10.1
	275/40 R22	107V XL	2145	51	9.5	10.94	30.67	10.1
	285/40 R22	110V XL	2332	51	10.0	11.42	30.98	9.8
	305/40 ZR22	114W XL	2596	50	11.0	12.28	31.57	10.5
35 Series	285/35 ZR21	105Y	2035	51	10.0	11.42	28.94	10.6
	265/35 R22	102V XL	1870	50	9.5	10.67	29.29	10.1
	285/35 ZR22	106W XL	2090	51	10.0	11.42	29.88	9.8
30 Series	325/30 ZR21	108Y	2200	51	11.5	13.03	28.70	10.6
	235/30 ZR22	90W XL	1320	51	8.5	9.49	27.60	9.8
	245/30 ZR22	92W XL	1166	51	8.5	9.76	27.83	9.8
	255/30 ZR22	95W XL	1518	51	9.0	10.24	28.07	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
65 Series	235/65 R17	108V XL	Q1 2017
60 Series	215/60 R17	100V XL	Q4 2016
	255/60 R17	110V XL	Q1 2017
	235/60 R18	107V XL	Q4 2016
	255/60 R18	112V XL	Q4 2016
	265/60 R18	114V XL	Q4 2016
55 Series	215/55 R18	99V XL	Q4 2016
	225/55 R18	98V	Q1 2017
	225/55 R19	99Y	Q1 2017
	235/55 R19	101H	Q1 2017
	255/55 R19	111V XL	Q1 2017
	255/55 R20	110W	Q1 2017
50 Series	235/50 R19	103V XL	Q1 2017
	255/50 R20	109V XL	Q4 2016
	265/50 R20	112V XL	Q4 2016
45 Series	275/45 ZR19	108W XL	Q4 2016
	285/45 R19	111V XL	Q1 2017
	285/45 ZR20	112Y XL	Q1 2017
	285/45 R22	114V XL	Q1 2017
40 Series	275/40 R20	106V XL	Q1 2017
	295/40 R20	110Y	Q1 2017
	255/40 R21	102W XL	Q2 2017
	265/40 R22	106V XL	Q1 2017
35 Series	295/35 ZR21	103Y XL	Q4 2016
	315/35 ZR20	110W XL	Q1 2017
	295/35 ZR24	110W XL	Q4 2016
	305/35 ZR24	112W XL	Q4 2016
30 Series	295/30 ZR22	103Y XL	Q4 2016



A/T 75/70

- 1 Combination of wide, dynamic block and straight, center block**
Provide strong grip on road surfaces, create balance, and offer perfect handling on the highway. Multi sipes create low noise and add driving comfort.
- 2 Straight center block**
Allows excellent handling on highways
- 3 Wide grooves**
Easily clear mud on off-road environments and enable water clearance on the highway



1



2



3



UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	inches	inches	32 nds
70 Series	235/70 R15	103S	875	44	7.0	239	711	13.0
75 Series	235/75 R15	105S	2035	44	6.5	9.3	28.9	9.3


BEST FOR ALL TERRAINS, ON-OFF ROADS

OMIKRON A/T

- 1 Interlocked center and intermediate blocks**
Combined with two sipes assure driving comfort on the highway
- 2 Block stepped edges and Z-shaped sipes**
Enhance traction on off-road surfaces, provide excellent cornering, and prevent irregular wear
- 3 Two main grooves with notches**
Effectively clear water from area of footprint to eliminate hydroplaning and maintain wet braking



1



2



3



Mileage warranty up to: 3 5 0 0 0

UTQG 600 A A

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi				
85 Series	LT 235/85 R16	120/116Q	10	3086/2756	80	6.5	9.30	31.70	13.2
75 Series	LT 245/75 R16	120/116Q	10	3086/2756	80	7.0	9.80	30.50	13.6
	LT 265/75 R16	123/120Q	10	3417/3086	80	7.5	10.50	31.70	13.4
70 Series	LT 265/70 R17	121/118Q	10	3197/2910	80	8.0	10.70	31.70	13.4
60 Series	265/60 R18	110H	—	2337	51	8.0	10.70	30.51	11.8
50 Series	265/50 R20	111S	—	2403	51	8.5	10.87	30.47	11.9
	285/50 R20	112H	—	2469	51	9.0	11.70	31.25	12.7
40 Series	285/40 R22	106H	—	2094	51	10.0	11.41	31.00	12.3


Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
75 Series	235/75 R15	105S	Q4 2016
70 Series	235/70 R15	103S	Q4 2016
60 Series	285/60 R18 LT	118/115S	Q4 2016

BEST FOR HIGHWAY TERRAIN

OMIKRON H/T

- 1 **Three semi ribs with interlocked blocks**
Maintain stability on the highway, offer driving comfort and a quiet ride
- 2 **Four wide grooves**
Drain water rapidly to prevent aquaplaning and enhance performance on wet surfaces
- 3 **Wide tread with silica compound**
Improves traction. Particularly effective in cold, wet environments

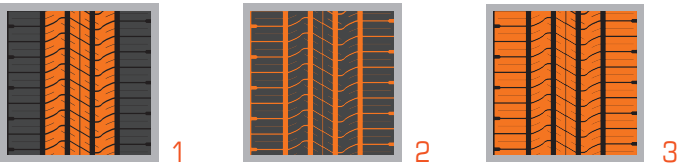

Mileage warranty up to: 3 5 0 0 0

UTQG 600 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			Single (lbs)	psi				
70 Series	245/70 R16	107T	2145	51	7.0	9.45	29.53	10.5
	255/70 R16	111T	2398	51	7.5	10.24	30.08	11.3
	245/70 R17	110T	2332	51	7.0	9.76	30.55	10.5
	265/70 R17	115H	2679	51	8.0	10.70	31.65	12.1
65 Series	245/65 R17	107T	2145	51	7.0	9.76	29.53	10.7

Series	Size	Load Index / Speed Symbol	Date
75 Series	LT 245/75 R16 10PR	120/116R	Q1 2017
	265/75 R16	116T	Q1 2017
70 Series	215/70 R16	100H	Q1 2017
	235/70 R16	106T	Q1 2017


Series	Size	Load Index / Speed Symbol	Date
65 Series	235/65 R17	104H	Q1 2017
	265/65 R17	112H	Q1 2017

Upcoming Sizes

BEST FOR MUD TERRAIN

M/T-1

- 1 **Unique tread blocks with wide center sipes**
Increase off-road traction
- 2 **Open scalloped hump tread**
Offer superior tracking on off-road surfaces; situated between block slots to drain water rapidly, as well as throw away trapped rocks, mud and other foreign material
- 3 **Deep tread design**
Allows strong hold on ground surfaces and maintains grip on loose surfaces

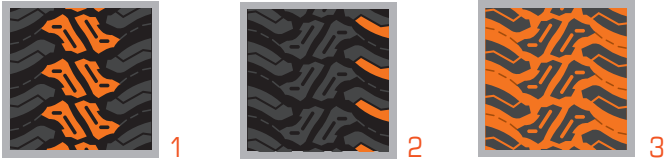

UTQG 600 A A

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi				
75 Series	LT 235/75 R15	104/101Q	6	1984/1819	50	6.5	9.30	28.90	16.5
55 Series	LT275/55 R20	115/112P	8	2679/2469	65	8.5	8.00	31.90	18.3
45 Series	LT 275/45 R22	112P	4	2469	51	9.0	10.67	31.77	18.1
Flotation	LT 31 X 10.50 R15	109Q	6	2271	51	8.5	10.60	30.50	17.4
	LT 33 X 12.50 R20	114Q	10	2601	65	10.0	12.52	33.07	18.3

Series	Size	Load Index / Speed Symbol	PR	Date
Flotation	35X12.50 R17 LT	125Q	8	Q4 2016
	35X12.50 R18 LT	123Q	10	Q4 2016
	33X12.50 R20 LT	114Q	10	Q4 2016
	35X12.50 R20 LT	121Q	10	Q4 2016
	37X13.50 R20 LT	127Q	10	Q4 2016

Upcoming Sizes

New upcoming mud terrain pattern

OMIKRON M/T

Series	Size	Load Index / Speed Symbol	PR	Date
75 Series	LT 315/75 R16	121Q	10	Q1 2017
70 Series	LT 285/70 R17	121Q	10	Q1 2017
	LT 315/70 R17	121/118Q	10	Q1 2017
65 Series	265/65 R17	112H	—	Q1 2017
	LT 285/65 R18	125/122Q	10	Q1 2017
50 Series	265/50 R20	111V	—	Q1 2017
Flotation	LT 30 X 9.50 R15	104Q	10	Q1 2017
	LT 33 X 12.50 R15	108Q	10	Q1 2017



A DURABLE AND ECONOMICAL CHOICE FOR COMMERCIAL VANS

ULTRA-3

- 1 **Two wide grooves**
Combined with a smaller center groove rapidly clear water to prevent hydroplaning
- 2 **Twin ribs and circumferential sipes**
Provide on and off-road traction in dry and wet conditions while enhancing driving comfort
- 3 **Notched shoulder blocks**
Offer excellent cornering stability



1



2



3



Series	Size	Load Index/ Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	Inches	inches	inches	32 nds
75 Series	195/75 R16 C	107/105S	8	2145/2035	69	5.5	7.72	27.48	11.6
70 Series	195/70 R15 C	104/102R	8	1980/1870	65	6.0	7.91	25.79	11.6
65 Series	235/65 R16 C	115/113R	8	2673/2530	69	7.0	9.45	28.03	12.2
LTRC	195 R14 C	106/104S	8	2090/1980	65	5.5	7.80	26.22	11.6
LTRC	195 R15 C	106/104R	8	2090/1980	65	5.5	7.80	27.17	12.2


Upcoming Sizes

Series	Size	Load Index / Speed Symbol	Date
LTRC	185 R14 C 8PR	102/100P	Q1 2017

BEST FOR COMMERCIAL VANS

ULTRA-2

- 1 **Zigzag circumferential grooves**
Designed for stability under heavy loads on wet and dry road surfaces
- 2 **Twin ribs with multi sipes**
Allow superior braking and wear resistance under heavy load conditions
- 3 **Rounded should blocks**
Prevent damage caused by sharp stones or objects



1



2



3



Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	inches	inches	inches	32 nds
LTRC	LT 185 R14 C	102/100P	8	1874/1764	65	5.5	7.4	25.6	9.6



World Certificates



Up to 12 months/
2/32nds



Up to 45,000 miles*



accelera
SPEED 'N STYLE TIRES

On our website you can discover more about car & truck tires.