

Preparation:

- Disconnect the negative battery terminal. Park the vehicle on level ground and set the emergency brake.
- We recommend reading through the installation instructions in whole before performing the work.
- Estimated Installation Time: .5 Hours

*****This installation requires 2 people for best results*****

You will need the following tools:

- Ratchet
- 7/32" Allen Wrench or Allen Socket
- 9/16" Wrench

Included in Kit:

- | | |
|-------------------------------------|---------------------|
| 1 - Button Head Bolt (3/8"-16 x 1") | 1 - U-Nut (3/8"-16) |
| 1 - License Plate Mounting Bracket | |

*****This installation must be done before the bumper is installed on the vehicle*****

Installation:

1. Remove the upper center skid plate bolt on your HoneyBadger front bumper. (Fig A)

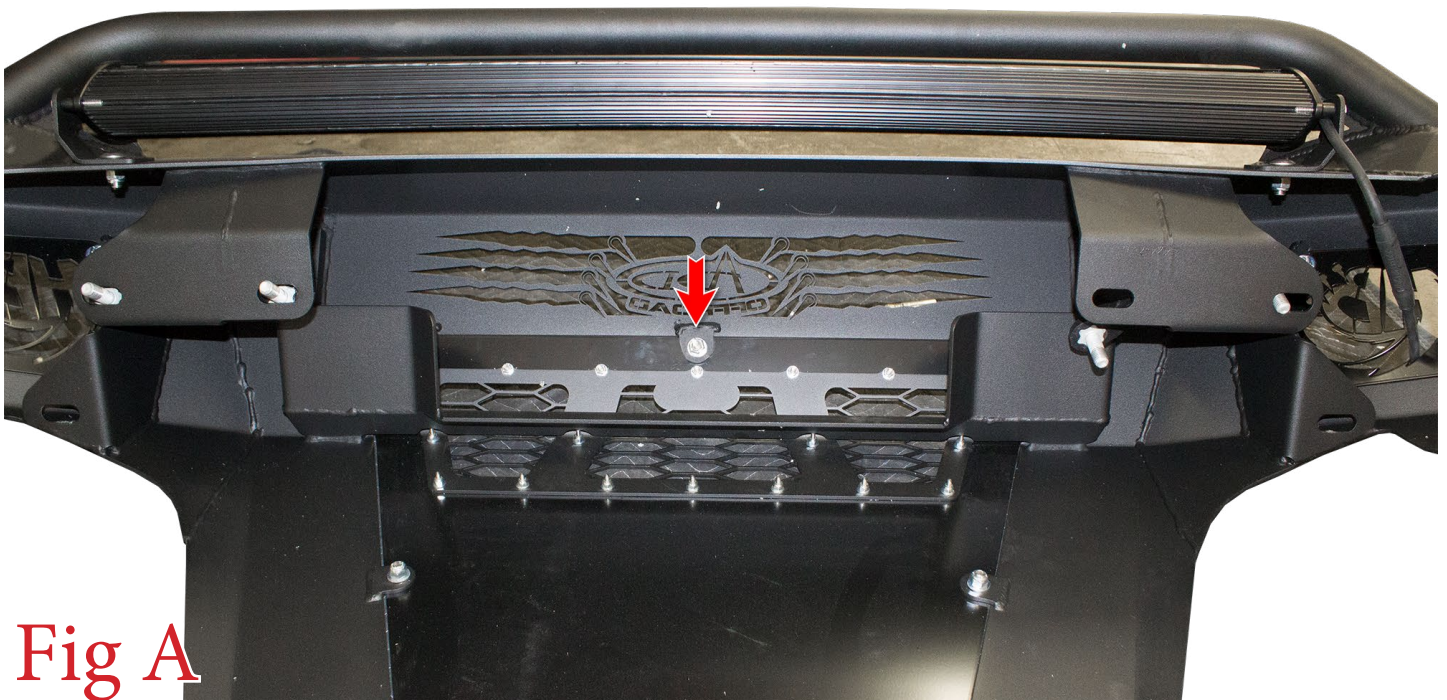


Fig A

2. Slide the supplied U-Nut (x1) into place in the now empty skid plate mounting hole. (Fig B)

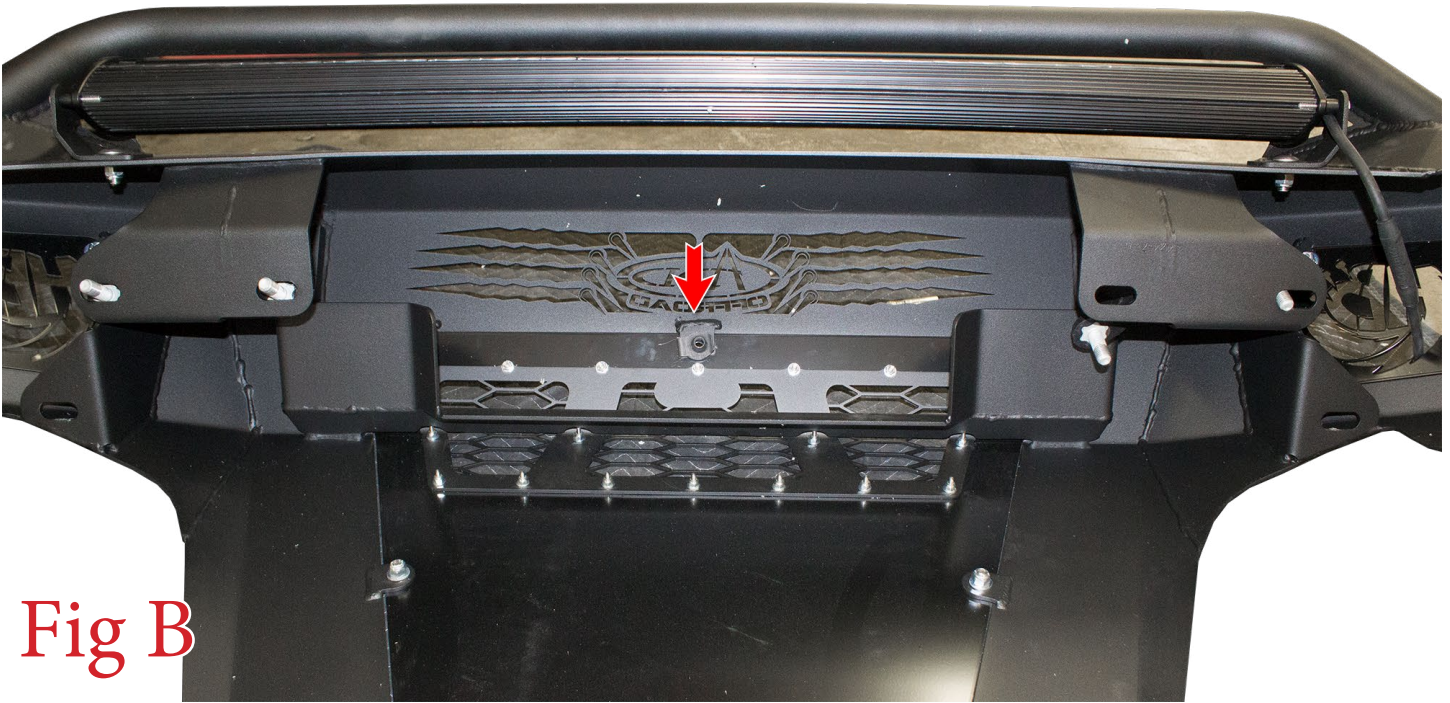


Fig B

3. Set the license plate bracket in place on the front of the bumper. Then, use the supplied 3/8" Bolt (x1) to hold it in place. Torque this bolt to 20 foot pounds. (Fig C)

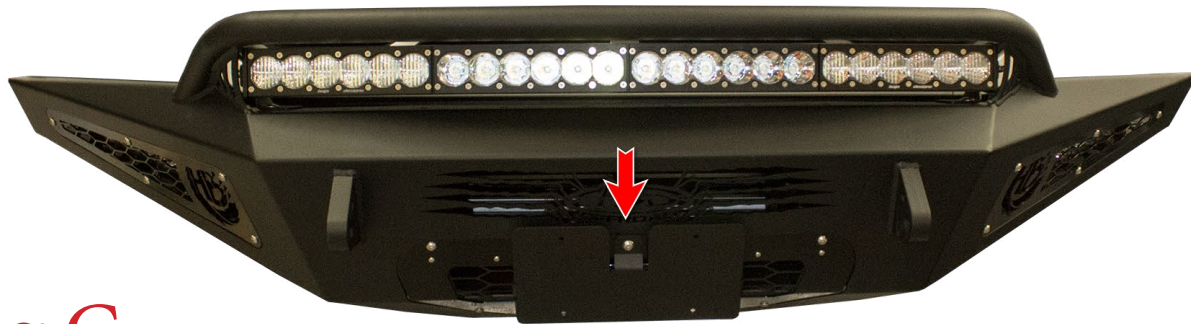


Fig C

4. Stand back and enjoy your new Front License Plate Bracket.
5. Check and re-tighten, if needed, all mounting bolts after 100 miles and periodically thereafter.