



## INSTALLATION INSTRUCTIONS


### PART NUMBER: 29-0010

---

2008-2013	MITSUBISHI	LANCER	L4-2.0 L
2009-2013	MITSUBISHI	LANCER	L4-2.4 L

#### PARTS LIST

	Description	Qty.	Part Number
<b>A</b>	FRONT STRUT BAR, MITSU LANCER	1	AEM-83043-PC
<b>B</b>	WASHER, FST, M10	6	RHWA-M10

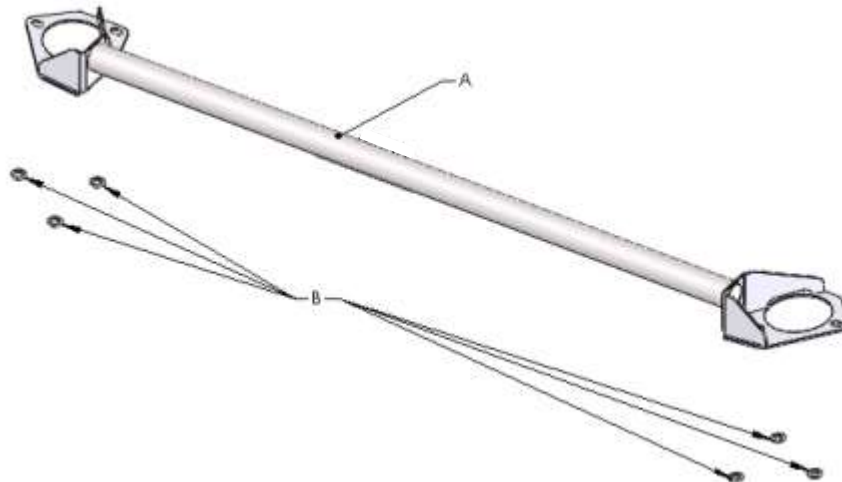

**Read and understand these instructions BEFORE attempting to install this product. Failure to follow installation instructions and not using the provided hardware may damage the strut bar.**

### **1. Preparing Vehicle**

- a. Make sure vehicle is parked on a level surface.
- b. Set parking brake.
- c. If engine has run in the past two hours, let it cool down.
- d. Do not discard stock components after removal of the factory system.

### **2. Removal of stock parts**



- a. With the car on the ground, use a 14mm socket to remove the (6) strut top nuts.

### **3. Installation of AEM Strut Bar**



- a. Place the (6) washers over the 6 strut studs.



- b. Install the AEM Strut Bar, and using a 14mm socket, replace the strut tower nuts.