


ALL60156 UPPER LINK BRACKET

- Bracket is not designed for a specific application and will fit a variety of rear ends and chassis.
- Grinding of QC side bell reinforcing ribs may be required to mount bracket.
- Longer QC center section "through bolts" may be needed to properly mount bracket.
- It is recommended to fabricate stiffener braces once brackets are fitted to rear end.

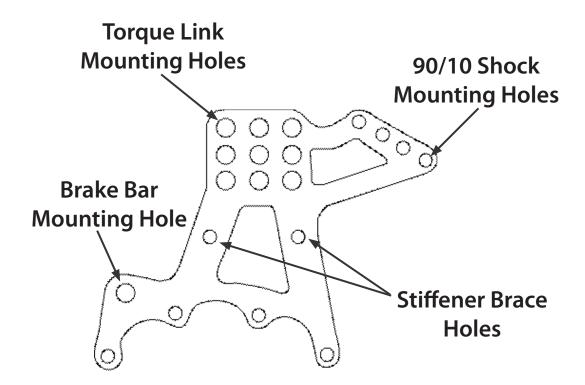

Form 1093 Page 1 of 1 Rev. 103009