

**PRODUCT DESCRIPTION:** Headlight  
**APPLICATION:** 2014-2018 GMC Sierra



## INSTALLATION GUIDE

READ COMPLETE INSTRUCTIONS BEFORE INSTALLATION  
Improper installation may void warranty.



**TOOLS NEEDED:** 7mm Socket. 10mm Socket. T-10 Torx bit

### STEP 1



Factory stock headlights

### STEP 2



Open hood and disconnect negative battery cable.

### STEP 3



Remove 16 body clip tabs on radiator shroud.

### STEP 4



Remove radiator shroud and set aside.

### STEP 5



Remove four 10mm bolts from top of radiator grill.

### STEP 6



Hold each end of grill and pull to remove grill. Fasteners will be holding grill in place.

### STEP 7




Remove 10mm bolt to remove headlight trim.

### STEP 8



Remove T-10 Torx screw and 7mm bolt to unclip front of fender trim.

### STEP 9

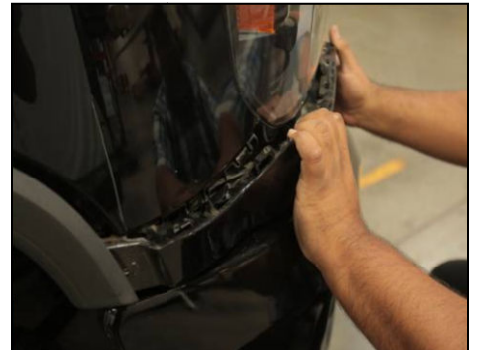

Carefully remove headlight trim.

**STEP 10**



Remove three 10mm bolts to remove headlight. \*\*Repeat process on other side\*\*

**STEP 11**



Disconnect main connector then remove headlight. \*\*Repeat process on other side\*\*

**STEP 12**



Reverse steps 2-11 to complete install of Anzo USA headlights.

**STEP 13**



Check all functions of light before driving vehicle.