



Completely read all the instructions before installation
Improper installation will void warranty!

Step 1



Tools needed:

10mm Socket
Phillips Screw Driver
Wire Splice Connectors

Step 2




Place the light bar at the desired location by using the provided 3M double sided tape

Step 3




Remove any one side of the tail light housing by removing the two 10mm screws or the two phillips screws depending on the model of your vehicle

Step 4

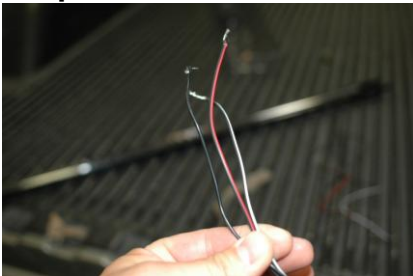


Locate the red, black, and white wirings from the light bar that will be connecting into your tail light for its power source

Step 5

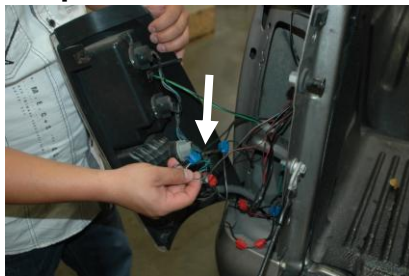

Connect the solid black wire from the light bar to the black ground wire from the tail light using the wire splice connector

Step 6

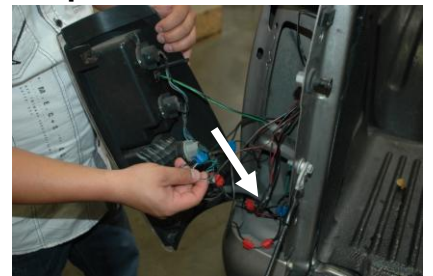

Connect the red wire plus the white and black striped wire from the light bar to the red wire parking light from the tail light using the wire splice connector

Step 7



Install the taillight housing by reversing the step 3

Step 8



Be sure to test all functions before driving the vehicle

**Light bar flash lights will be charged while the vehicle is running or by turning on the parking lights*