



Tools Needed:
Phillips Screw Driver



Step 1: Lower the tail gate
exposing the two screws.




Step 2; Remove the upper and
lower screws



Step 3: Remove the taillight
by pulling straight out.



Step 4: Remove all 3 sockets
from the taillight housing.

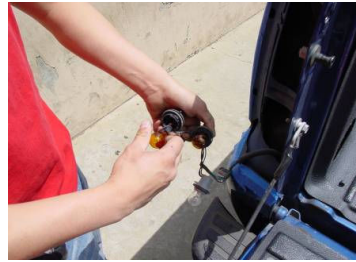

Step 5: Remove the bulbs
from the two black sockets.



Step 6: Place the resistor in
a safe location in the housing.



Step 7: Connect the pigtails
to the stock sockets.



Make sure the wires match:
Black to Black



Step 8: Connect the resistor
to the taillight housing.



Step 9: Place the LED taillight
into the truck housing, secure
with screws.



Make sure all functions are
working properly before
driving.