


Tools needed: none



Step 1: Locate the two outer locking screws and remove them.



Step 2: locate the third locking screw and remove the screw.

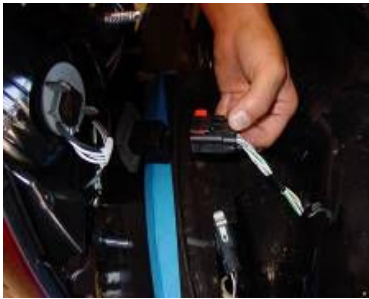

Step 3: pull off the tail light from the car and unplug the wire harness.



Step 4: Remove the protective tape from the resistor and place under the tail light behind the rear bumper.



Step 5: Plug in the resistor plug the put the tail light on the car.



Step 6: Once light is on the car plug the wire harness into the light and then screw the three locking screws in.



Step 7: Make sure all functions are working properly before driving.