

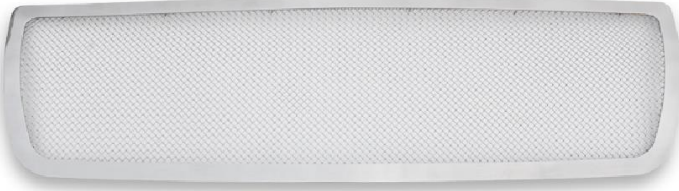
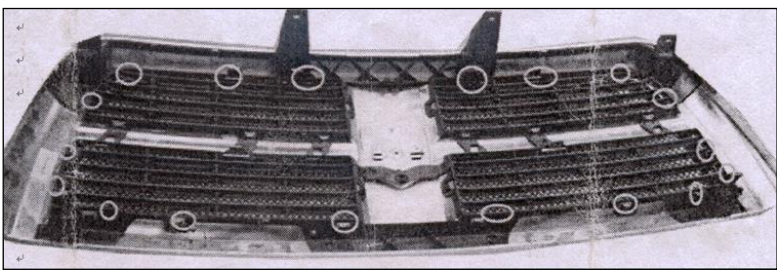


## Grille Installation Instruction

<b>Part#</b>	GR04GFH79T/H	<b>Application</b>	<b>For 2010-2010 Dodge Ram 2500 / 3500 / 2011-2013 Ram 2500 / 3500</b>		
--------------	--------------	--------------------	--	--	--

<b>Parts List</b>	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	4	Phillips Screws	18	M4X20
	2	L Brackets A	6		5	Kept Nuts	18	6-32
	3	L Brackets B	12		6	Flange Nuts	18	M4

**Install Notes:** Overlay  Replacement  Drill  Cut

<b>Step</b>	<b>Description</b>	<b>illustration</b>
1	Identify the grille & hardware with parts list.	
2	Pop Hood, remove plastic shroud at the top and set fasteners aside. <b>Optional:</b> Using factory instructions, remove the entire front grille shell(as pictured in all Figures).	
3	Attach the L Brackets A to screws on the top of the grille, secure them with flange nuts.	
4	Attach the L Brackets B to other screws of the grill, secure them with flange nuts.	
5	Position the Grille onto grille shell cavity	
6	Mark locations for drilling on the shell through the holes of L Brackets, Then drill holes on the those locations.	
7	Attach the Grille to the shell by inserting the screws through the tabs of L Bracket and holes on the shell; secure them with Kep Nuts provided.	
8	Make sure the grille is centered and tighten the fasteners.	
9	Reinstall the plastic shroud with the fasteners removed in Step 2.	
10	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!