

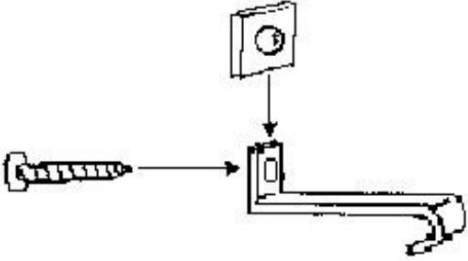


Grille Installation Instruction

Part#	GR06FFJ14J	<i>Application</i>	For 2005-2009 Ford Mustang GT V8 Not For California Edition
--------------	------------	--------------------	--------------------------------------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Stainless steel	3	U-Clip Nuts	4	8-32
	2	'J' Hooks	4		4	Screws	4	8×1 1/4"

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	N/A
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	N/A
3	Center the billet over the opening with the longest bar on top. Not the tabs welded to the rear of the insert. Remove the insert. Slide the U-clip Nuts over the end of the 'J' hooks. From the front, insert a screw into each tab on the billet insert. Start to thread both screws into the 'J' hooks (the top two only) as show below.	
4	Now place the billet insert over the opening. Wrap the ends of the 'J' hooks around the factory cross bars. Make sure the insert is centered.	N/A
5	Make sure the billet grille is centered and tighten the fasteners.but do not over-tighten.	N/A
6	Reinstall the black plastic cover which was removed in step 2.	N/A
7	Installation completed!!!	N/A

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.
 Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
 We are not responsible for any damage caused by the installation. Thank you for choosing our product!