


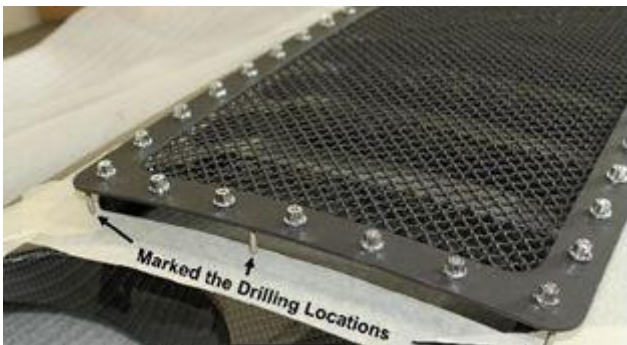

Part#	GR10LEH19H	Application	2007-2014 Jeep TJ Wrangler Main Upper
-------	------------	-------------	---------------------------------------

arts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	4	Washer	12	
	2	Stud	12	10-24x1 "				
	3	Lock Nut	12	10-24				

Install Notes: Overlay ☐ Replacement ☒ Drill ☒ Cut ☒

Step	Description	illustration
1	Identify the grille & hardware with parts list. Open and lift hood. Locate and remove the (6) plastic fasteners across the top of the shell using a flat screw driver	N/A
2	Slightly tilt the shell forward and locate the (4) clips at the bottom of the shell. Use a flat a screw to remove these clips. Then remove shell from vehicle	N/A
3	Protect the finish of the shell by using masking tape around the edge of the vertical vents. Place the Grille over the shell and mark the drilling locations	
4	Drill out the marked locations using a 5/16" drill bit. IMPORTANT! Always eye protection when drilling or cutting	N/A
5	Cut the shell NOTE: When cutting the shell, make sure you leave about 1/4" material around the drilled holes	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.
Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	GR10LEH19H	Application	2007-2014 Jeep TJ Wrangler Main Upper
6	<p>Once you have cut the vertical bars off the shell, place the Grille over the shell and attach it by threading the included threaded studs into the tabs and secure by sliding backing plate over threaded stud then add washer and nut.</p> <p>NOTE: If you place the Grille over the shell and it doesn't fit flush. Trim the shell where the rivets are located. Tighten all hardware at this time</p>		
7	<p>Re-install the shell with your new grille back to the vehicle using the OE fasteners You previously removed</p>	N/A	
8	<p>Installation completed!!!</p>	N/A	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result.
Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
We are not responsible for any damage caused by the installation. Thank you for choosing our product!