

PN: N76751T

2010 Nissan Altima Sedan – Low Bumper Mesh Grille

Hardware


3 -- 6-32×2" Screws

6 -- 6-32 K-Lock Nuts

5 -- #6×1/2" T-10 Torx Pin Head Screws

3 -- Washers

- (1) Use a lift or raise the car on a jack and use jack stands to support it.
Remove the factory fasteners that retain the lower pan and remove it for lower grille hardware access.
- (2) Install tape at the sides and bottom of the lower grille opening.
- (3) Thread a screw in each nut welded to the grille. From the rear, place a washer and two 6-32 K-Lock Nuts onto each screw and tighten until the washer no longer rotates.
- (4) Push the top of the grille in until the mesh is tight against the center bar and use a 1/16" drill bit to drill through the existing holes in the small mounting tabs and install the supplied #6×1/2" T-10 Torx pin head screws.
- (5) Carefully peel back the protective masking tape from around the lower mesh grille. Peel the tape back over itself to minimize tape breakage. Pulling down on the bumper cover underneath the mesh grille will help increase the gap, making it easier to remove the tape.

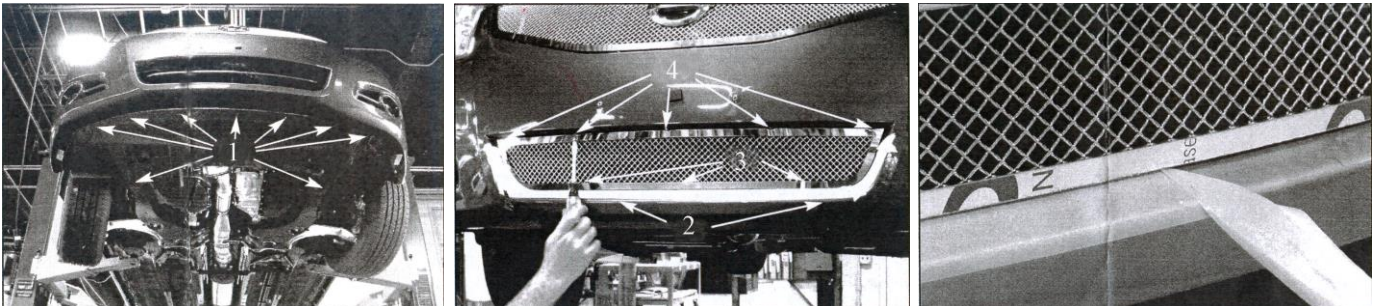

- (6) Reinstall the lower pan removed in Step 1.
- (7) Finish removing the protective tape. Thoroughly clean the grilles (using a mild solvent to remove any glue residue left from the protective covering, followed by glass cleaner to remove any solvent residue) once you are finished the installation.

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!