

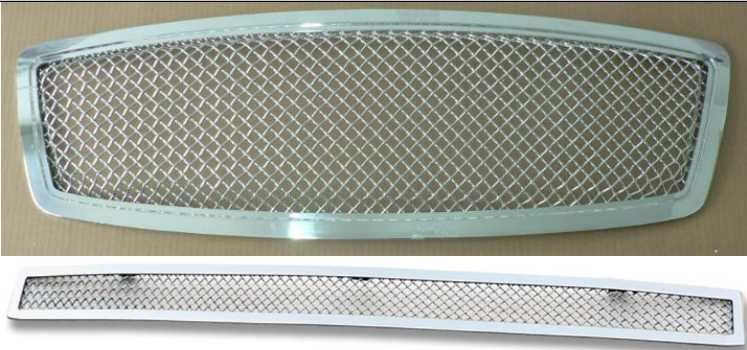


Grille Installation Instruction

Part#	GR14GGH77T	Application	For 2003-2005 Infiniti FX35 /FX45
-------	------------	-------------	-----------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	2	Stainless steel	5	Studs	2	6#-32×1 1/2"
	2	Washers	7		6	Top Mounting Plate	1	
	3	Flange Nuts	7	6-32	7	J Hooks	5	
	4	Studs	3	10-24×2"	8	Nylon Lock Nuts	3	10-24

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Start with the main grille. Remove the factory grille; use a small screwdriver to remove the center from the four fasteners along the top. There is one fastener securing the bumper next to the grille; use a slotted screwdriver to pop the center and remove. The fasteners will be re-used; do not discard,. Next, lightly pull the top of the grille assembly forward. Use your fingers to depress the remaining clips behind the grille. The grille can now be removed.	
4	The new grille uses a mounting plate along the top. Attach the mounting plate to the grille using the nuts and washers to secure the plate.	
5	Test fit the grille to make sure that it fits in the shell properly. Make sure the grille is centered.	
6	Thread a screw in each nut welded to the grille. From the rear, place a bracket on each screw. Then thread a nut and a washer on each screw.	
7	Test fit the billet in place; the flat aluminum spacer welded to the grille rest on the bottom. Thread the studs into the lower mounting holes. A small amount of liquid thread lock may be applied to the threads. BE SURE NOT TO OVER-TIGHTEN THE STUDS (Over-tightening can cause dimpling to the face of the billets)..	
8	Install a J hook and nylon lock nut onto each stud. Center the grille into the opening and wrap the J hooks around the rear of the bumper opening. Tighten the hardware until the grille is held in place.	
9	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
10	Reinstall the black plastic cover which was removed in step 2.	
11	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.
Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
We are not responsible for any damage caused by the installation. Thank you for choosing our product!