


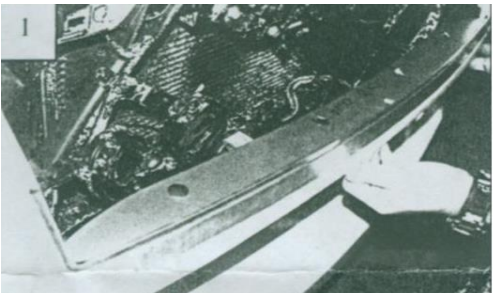



# Grille Installation Instruction

Part#	<b>GR14GGI03T</b>	Application	<b>For 2004-2010 Infiniti QX56</b>
-------	-------------------	-------------	------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	2	Stainless steel	7	Nylon Lock Nuts	15	10-24
	2	Studs	4	10-24×2"	8	Plastic Body Retainers	4	
	3	Washers	4		9	Lower Mounting Plate	1	
	4	Studs	3	10-24×1 1/4"	10	"J" Hooks	2	
	5	Studs	4	10-24*1 1/4"	11	Truss Head Tapping Screws	2	8×1"
	6	U-Nuts	2	8#	12	Raised Extension Brackets	2	

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Start with the main grille. Center the billet grille into the opening of the factory grille shell. Secure the bolt to the threaded holes on the front of the grille. Be sure the bolts are through the OEM grille shell.	
4	Secure billet grille using the nuts from the back side of the OEM grille shell.	
6	These screws will be used to adjust the position to the hood on top. Center the grille in place; slide the upper mounting screws into the factory mounting holes. Align the four holes in the lower mounting plate to the factory holes in the hood. Use the plastic tree retainers to secure the lower plate (1). Adjust the upper nuts until the grille is aligned with the hood properly. Use the remaining flat washers and Nylon lock nuts to secure the upper mounting screws (2). Loosen the hardware and adjust the grille if needed. The factory logo is held on with double-sided tape. Use a heat gun or hair drier to heat the tape and pry from the factory grille.	 

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

## Grille Installation Instruction

Part#	GR14GGI03T	Application	For 2004-2010 Infiniti QX56
7	Continue to the bumper grille, test fit the grille in place. Remove the grille and attach the raised extension brackets as shown (1). Place the grille face up on a work-table; install the four studs into the grille. A small amount of liquid thread lock may be applied to the threads. BE SURE NOT OVER-TIGHTEN THE STUDS (over tightening can cause dimpling to the face of the billets).		
8	Slide the u-nuts onto the J hooks. Secure the J hooks to the extension brackets with the screws (Do not tighten). Re-center the grille in place; wrap the hooks around the vertical plastic bars in the opening (2). Carefully tighten the mounting screws (3). It may be necessary to slightly bend the extension brackets so they can allow tension to the J hooks.		
9	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.		
10	Reinstall the black plastic cover which was removed in step 2.		
11	Installation completed!!!		

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.  
Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.  
We are not responsible for any damage caused by the installation. Thank you for choosing our product!