



PATENT PRODUCT

Grille Installation Instruction


Rev. 190601

Part#	GR14HED47 C/S/J	<i>Application</i>	For 2004-2010 Infiniti QX56
--------------	----------------------------	--------------------	------------------------------------

	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
Parts List	1	Billet Grille	1	Stainless steel	3	Nuts	4	1/4" -20
	2	Hex Bolts	4	1/4" -20 × 3/4 "	4	Flat Washers	4	

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	N/A
2	Remove the factory grille shell, use a small screwdriver to pull the center from each fastener. The fasteners will be re-used, do not discard the fasteners. Next, lightly pull the top of the grille assembly forward. Use your fingers to depress the two molded clips along the bottom and one in each corner. The grille can now be removed. If installing a bumper billet, install the bumper billet and then go to step below.	
3	Center the billet insert into the opening. The lower mounting tabs align with the factory mounting holes. It is necessary to trim the plastic behind the hole as shown in the picture. Slide the nuts over the plastic clips as shown here.	
4	The upper mounting tabs align to the factory mounting holes. It may be necessary to slightly bend the brackets to achieve a perfect fit. Use the washers to secure the billet on top.	
5	Secure the bottom with the hex bolts provided. Do not over-tighten the hardware. Carefully check the hood clearance to the billet grille. Re-move the billet and adjust the brackets if needed.	
6	Installation completed!!!	

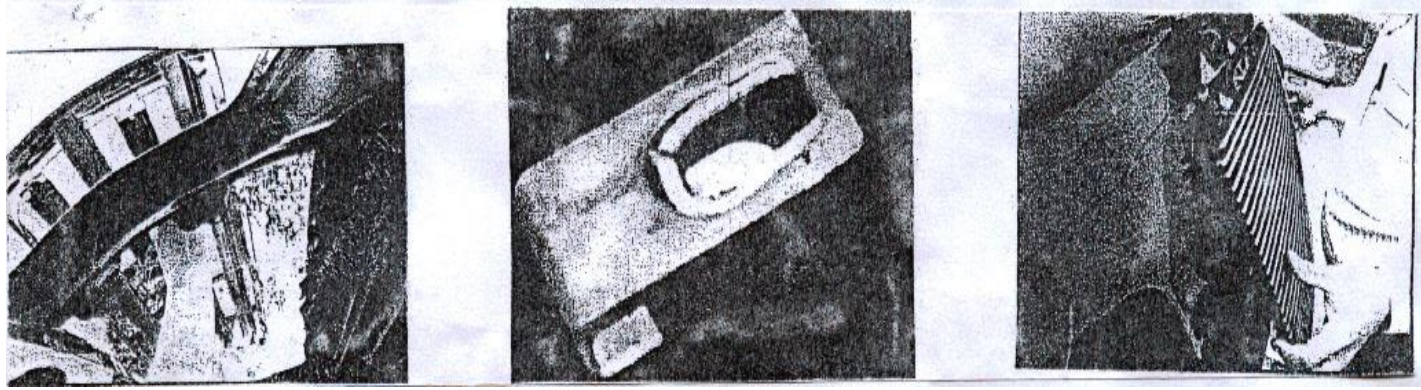

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!