



PATENT PRODUCT


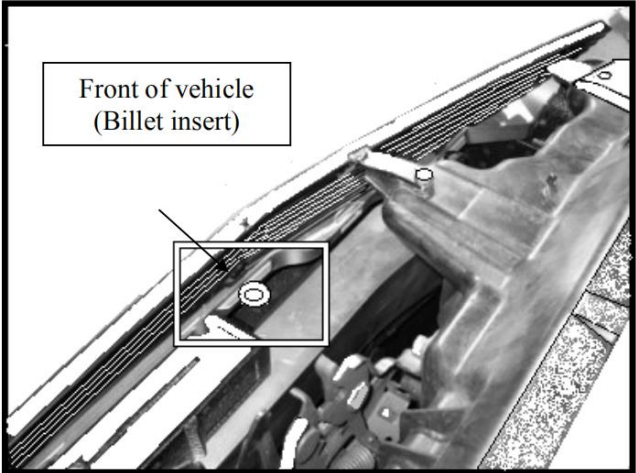
Grille Installation Instruction

Rev. 190201

| | | | |
|--------------|--------------------|--------------------|---|
| Part# | GR14HEF00 C/S/J | Application | For 2003-2004 Infiniti G35 Sedan |
|--------------|--------------------|--------------------|---|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|-------------------|------|---------------|-----|-----------------|------|--------------|-----|---------------|
| | 1 | Billet Grille | 1 | Stainless steel | 4 | Lock Washers | 2 | 1/4" |
| | 2 | Nuts | 2 | 1/4" -20 | 5 | Hex Bolts | 2 | 1/4" -20×3/4" |
| | 3 | Flat Washers | 2 | 1/4" | | | | |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | illustration |
|------|--|--|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Remove the factory grille shell; use a small screwdriver to pull the center from each fastener. Two of the fasteners will be re-used; do not discard the fasteners. Next, lightly pull the top of the grille assembly forward. Use your fingers to depress the molded clips along the bottom of the grille. The can now be removed. | |
| 3 | Center the billet insert into the opening. The lower mounting tabs align into the factory holes. Use a 1/4" bolt, nut and washer to secure the lower tabs. Use the factory fasteners to attach the upper mounting brackets. These brackets align to the factory holes also. It may be necessary to slightly bend the upper brackets so they align correctly. |  |
| 4 | Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten. | |
| 5 | Close the hood and check the alignment of the billet insert. If necessary, remove the insert and adjust the brackets. | |
| 6 | Installation completed!!! | |

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!