

LED SLIM STROBE

AMBER/WHITE FLASHER



Dual colour - amber/white. Flash rate: 48 per minute.

Choose from the remote receiver or switch option.

The remote controlled lighting system is a unique and practical solution that minimizes installation time and provides additional convenience to the end user – no external switch, turn on and off as required, in or out of the vehicle.

Applications include: Trucks, Utility, Construction, Snow Removal Vehicles.

FEATURE	BENEFIT
Remote controlled lighting system	Operates up to a distance of 50'.
2 button keyfob – ON/OFF	434MHz FCC approved. Can be replaced and easily paired in case of loss.
External remote receiver or switch option	Reduces installation time.
300 lumens/amber LED & 700 lumens/white LED	Provides effective visibility and warning around work truck.
Adhesive mount	Easy installation, reduces installation time.
Completely sealed unit	Waterproof.
Alternating amber/white flash patterns	Highly visible, multiple configurations with up to 360° of lighting.

LED SLIM STROBE



AMBER/WHITE FLASHER



Part #	Description	Lumens	Operating Voltage
23705-81500	LED Slim Strobe Single	300 Amber / 700 White	12Vdc
23705-81501	LED Slim Strobe Remote Kit 6pc	300 Amber / 700 White	12Vdc
23705-81502	LED Slim Strobe Switch Kit 6pc	300 Amber / 700 White	12Vdc

Specifications:

- Operating Voltage: 12Vdc
- Operating Current: 100mA Average @ 12Vdc (Flashing)
- Max Current: 200mA @ 12Vdc
- Power Consumption: 1.2W @ 12Vdc
- Max Power Consumption: 24W @ 12Vdc
- Temperature Range: -40°C to +85°F
- IP Rating: IP69
- Weight: 2.3oz (65g)
- Connection: Delphi 2-Way (1205 9253)
- Housing: Black ABS
- Lens: Polycarbonate
- Mounting: 3M Double-Sided Adhesive Tape
- LEDs: 6 (3 Amber + 3 White)

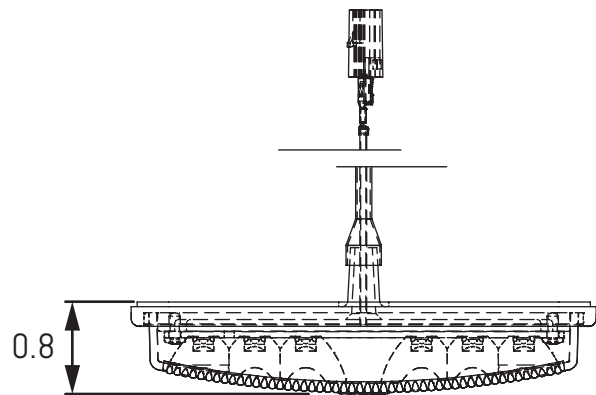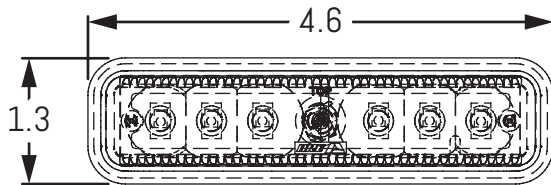

A.R.E. lighting and electronic products must be fused appropriately in all instances.
NOTE: Improperly fused/installed product will invalidate the warranty.



Learn more about emergency and warning lighting we have.