SM488L22 | Mega Grip 22" Flexible Seat Rail Smartphone Mount




Passenger Seat Bolt Mounting – Option 1:

Use a socket wrench to loosen the passenger seat track bolt.


2 Insert the seat track bolt bracket.



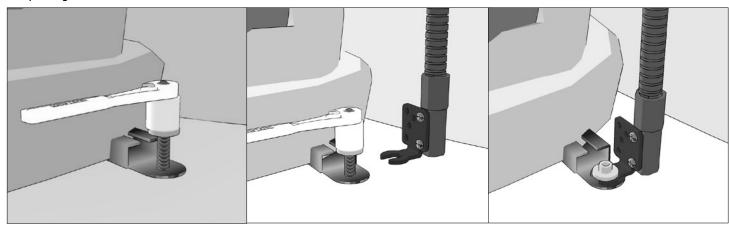

Floor Mounting – Option 2:

Screw the floor bracket to the mount. (Depending on your vehicle, you may need to change the orientation of the bracket.) Attach the floor / console bracket with screws.

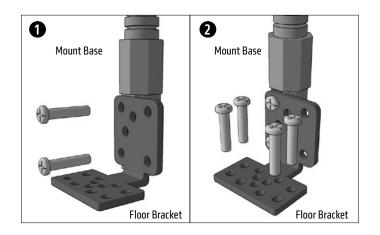


Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and / or air bag deployment.

Arkon is not responsible for any damages caused to your vehicle, your device, or yourself due to the installation or use of this mount.

Using the Mega Grip Holder

Attach the Mega Grip holder to the pedestal head by inserting the Dual T-Tabs into the Dual T-Slots on the back of the holder. Insert phone (not included) on the support legs and squeeze the side grip arms until firmly holding the device. Push the release button to remove the device. Loosen adjustment ring to change position if needed.



ARKON RESOURCES INC. The Mobile Mounting Specialists[™]