
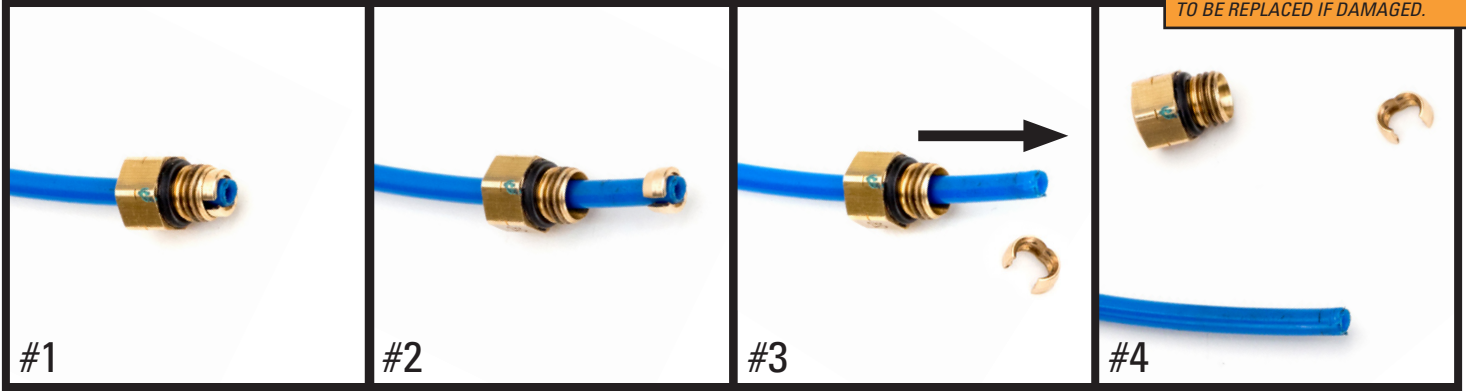


NOTE: THE AIR STRUT ASSEMBLY WILL SHIP WITHOUT AIR PRESSURE.

REMOVAL  Prior to inserting the existing air line into the new air fitting you will need to remove the old original equipment air line fitting.

NOTE: SCRATCHES AND/OR DEEP CUTS IN THE AIR LINE CAN RESULT IN POSSIBLE LEAKS. INSPECT THE AIR LINE BEFORE INSERTION. AIR LINE NEEDS TO BE REPLACED IF DAMAGED.




#1 ORIGINAL OE AIR LINE FITTING

#2 SLIDE THE THREADED PORTION UP THE LINE AND SPREAD THE COLLET OPEN TO REMOVE

#3 SLIDE THE AIR FITTING OFF OF THE AIR LINE

#4 AIR LINE IS READY FOR INSTALLATION

INSTALLATION - USING THE NEW AIR LINE FITTING PROVIDED IN THE KIT

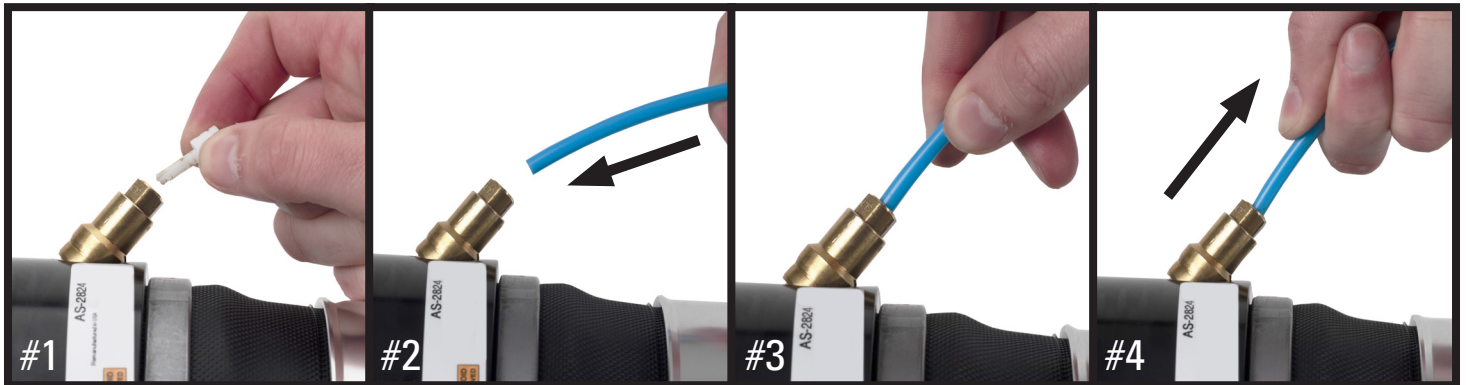

#1 REMOVE AND DISPOSE OF THE SHIPPING PIN

#2 INSERT AIR LINE INTO THE AIR LINE FITTING UNTIL IT STOPS

#3 AIR LINE INSERTED

#4 GENTLY PULL ON AIR LINE TO CONFIRM IT IS FULLY SECURED BY THE AIR LINE FITTING

Arnott® is committed to the quality of its products.