Replacement Rearview Mirror Monitor

FEATURES

• 7" TFT LCD display with highly-reflective glass surface that serves as a rearview mirror when back-up camera system is not active

ტ

- 12VDC power
- PAL/NTSC compatible

Voyager.

- 16:9 aspect ratio
- Three camera inputs
- Manual (push button) or automatic (trigger) source selection
- Built-in speaker



CAMERA OPTIONS

Voyager



VCMS50i




VCMS17B



EXPAND your vision

Replacement Rearview Mirror Monitor VOM74MM

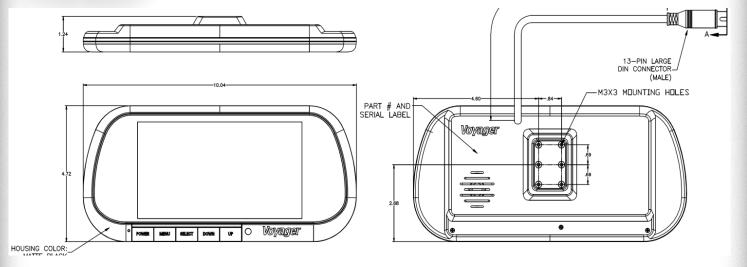

Voyager.

Power System			12VDC	
Operating Voltage Range			10V ~ 32V	
	Idle		55mA	
Current Draw @ 12V	Nominal		407mA	
	Maximum		493mA	
Operating Temperature Range			-22°F to 185°F	-30°C to 85°C
Storage Temperature Range			-40°F to 203°F	-40°C to 95°C
Maximum Relative Humidity			85%	
Overall Dimensions (inches)			10.04(W) x 4.72(H) x 1.24(D)	
Product Weight (unpackaged)			1.4 lbs(Monitor only)	
Performance Spe	cifications:	·		
Video / Display System			NTSC/PAL	
Video Input Signal (Composite)			1V P-P @ 75Ω	
Audio Output			1W	
LCD Specifications	Diagonal Size		7"	
	Resolution		800 x 480	
	Brightness		400 nit	
	Contrast Ratio		500:1	
	View Angles	Тор	70°	
		Bottom	50°	
		Left	70°	
		Right	70°	
	Display Format (aspect ratio)		Analog 16:9	
	Response Time	Rise	10ms	
		Fall	15ms	
	Backlight Type		LED	
	Backlight Life (min)		50,000 Hours	

Features and specifications subject to change without notice.

Accept no compromises, choose only quality semi truck installation parts.