



Model # AJ22FE2A

**22 TON CAPACITY
AIR OVER JACK W/
QUICK SPRINGS
(2PC HANDLE)**



LONG "T" HANDLE
helps in positioning jack
under vehicles with
long overhang

HANDLE LOCKING LEVER
secures handle in either
vertical or horizontal position

JACK RELEASE VALVE
is top mounted at "T" handle
and allows jack operation
at any handle position

RUST INHIBITIVE COATING
on ram and extension screw

EXTENSION SCREW
gives added height
when necessary

**QUICK SPRINGS
FOR FAST RAM RETRACTION**
eliminates manual lowering of jack


**LARGE 8" (203MM) DIAMETER
HARD RUBBER TIRES**
make maneuverability easier

Model	Weight Capacity	Min. Saddle Height	Max. Height without Adapter	Max. Height with Largest Adapter	Height with Handle
AJ22FE2A	22 Ton (44,000 lbs.)	8-1/4" (210mm)	17-3/4" (450mm)	21-1/2" (545mm)	50" (1270mm)
Air Pressure	Hydraulic Lift	Chassis Length	Chassis Width	Net Weight	
100-145psi	4-1/2" (110mm)	22-3/8" (570mm)	12-3/4" (322mm)	112.4 lbs. (51kg)	

- Compact and portable
- Safety overload system prevents jack from being used beyond its rated capacity
- Comes with extended height saddle adapters
- **MEETS ANSI STANDARD FOR PERFORMANCE AND SAFETY**



HYDRAULICS

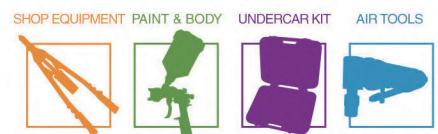

Discover other car jacks on our website.