

PCR/LTR/SUV




***The world rides on Atlas!***

## DISCOVERING AND TRAVELING AMERICAN ROADS SINCE 1935.

Atlas Tires have deep American roots, having been exclusively distributed by Standard Oil throughout the United States since the 1930s. Atlas offers modern patterns and cutting-edge technology for the passenger, light truck and commercial truck tire segments, setting the standard for others to follow.

Atlas tires are manufactured by one of the largest tire manufacturers in the world and have passed all US DOT, European ECE, and CCC Certification, assuring Atlas tires are manufactured to offer superior quality, performance and durability.

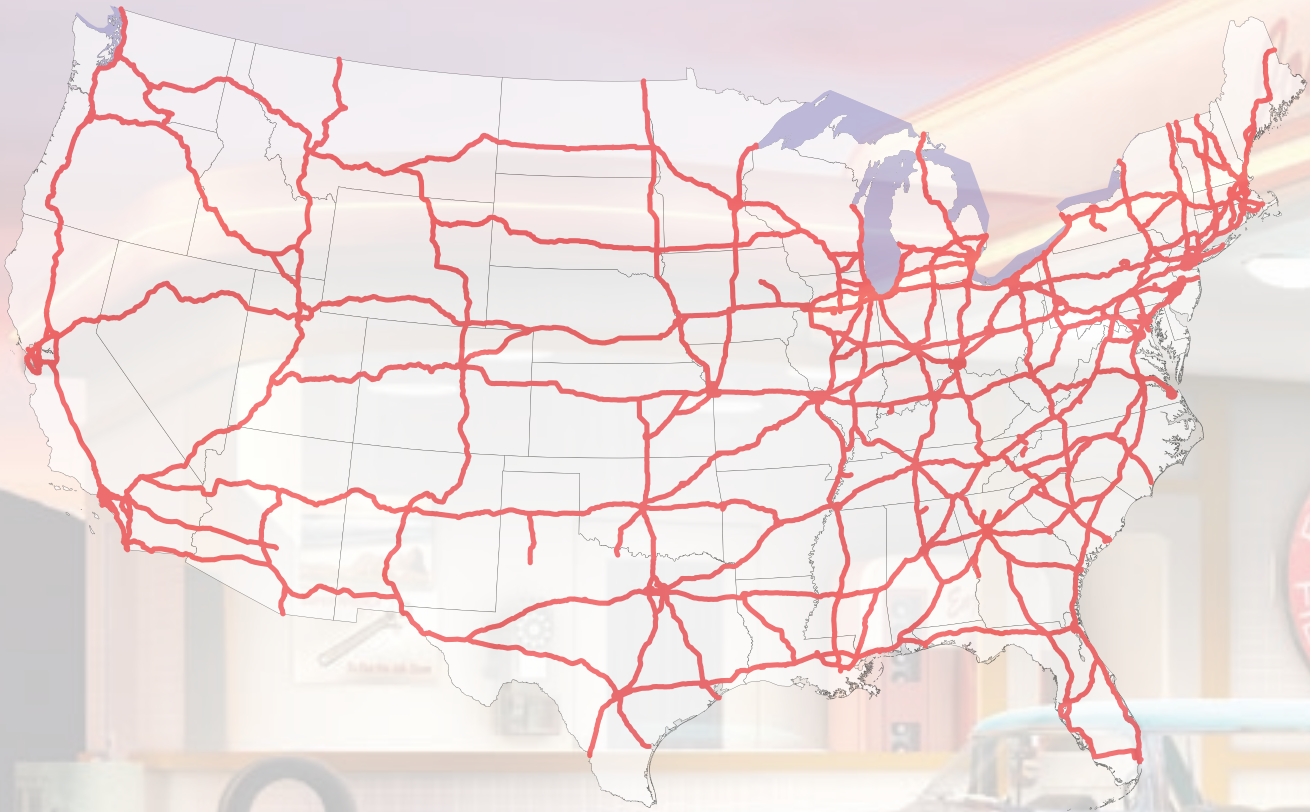



## WHY CHOOSE ATLAS?

### ICONIC AMERICAN BRAND

As an enduring iconic American brand, Atlas has been riding on USA roads since 1935. The brand is synonymous with quality, endurance, and dependability.

### DESIGNED BY TIER-1 ENGINEERS

Atlas Tires are designed and audited by former tier-1 tire engineers. Atlas uses its own compound formula, providing longer tread life with a balanced footprint for even wear.

### RIGOROUS QUALITY TESTING STANDARDS

All Atlas Tires are in strict compliance with USA DOT specifications and are manufactured under QS9000/ VDA6.1/ GB/ T19001/ISO9001 and TS16949 quality standards.

### FULL LINE

Atlas has an extensive size range in the passenger, light truck and truck segments, covering a full program range from 13" PCR to 24.5" TBR tires. Atlas offers a strong competitive advantage allowing you to supply the same brand name in PCR, LT, and TBR tires.

### ANTICIPATING MARKET NEEDS

The company is constantly evolving as it continues to develop new patterns and sizes to serve diverse markets. Atlas Tires offer the perfect combination of progressive thinking with modern patterns and sizes.



### LEGEND UHP

- Asymmetrical design provides optimal ground contact and shortens braking distance on wet and dry surfaces.
- Lug-type shoulder blocks improve handling performance.
- Exterior rim flange protector helps guard wheels from curb damage.

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max single Load (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )
205/45R16	87	W	XL	400/A/A	7J	1201	42	23.23	8.11	9.83
205/50R16	87	W	-	400/A/A	6 1/2J	1201	36	24.09	8.43	9.83
205/40R17	84	W	XL	400/A/A	7 1/2J	1102	42	23.46	8.35	9.83
205/50R17	93	W	XL	400/A/A	6 1/2J	1433	42	25.12	8.43	9.83
215/45R17	91	W	XL	400/A/A	7J	42	1356	24.65	8.39	9.83
215/50R17	95	W	XL	400/A/A	7J	42	1521	25.51	8.90	9.83
215/55R17	98	W	XL	400/A/A	7J	42	1653	26.30	8.90	9.83
225/45R17	94	W	XL	400/A/A	7 1/2J	42	1477	24.96	8.86	9.83
225/50R17	98	W	XL	400/A/A	7J	42	1653	25.91	9.17	9.83
225/55R17	97	W	-	400/A/A	7J	36	1609	26.77	9.17	9.83
235/45ZR17	97	W	XL	400/A/A	8J	42	1609	25.35	9.29	9.83
245/40R17	91	W	-	400/A/A	8 1/2J	36	1356	24.72	9.76	9.83
245/45R17	99	W	XL	400/A/A	8J	42	1709	25.67	9.57	9.83
215/35R18	84	W	XL	400/A/A	7 1/2J	1102	42	23.90	8.58	9.83
225/40R18	92	W	XL	400/A/A	8J	42	1389	25.08	9.06	9.83
225/45R18	95	W	XL	400/A/A	7 1/2J	42	1521	25.94	8.86	9.83
235/40R18	95	W	XL	400/A/A	8 1/2J	42	1521	25.39	9.49	9.83
235/50R18	101	W	XL	400/A/A	7 1/2J	42	1819	27.28	9.65	9.83
245/40R18	97	W	XL	400/A/A	8 1/2J	42	1609	25.71	9.76	9.83
245/45R18	100	W	XL	400/A/A	8J	42	1765	26.65	9.57	9.83
255/35R18	94	Y	XL	400/A/A	9J	42	1477	25	10.24	9.83
255/45R18	103	W	XL	400/A/A	8 1/2J	42	1929	27.05	10.04	9.83
245/40R19	98	W	XL	400/A/A	8 1/2J	42	1653	26.73	9.76	9.83
245/45R19	98	Y	-	400/A/A	8J	36	1653	27.68	9.57	9.83





## FORCE HP

- Asymmetric tread pattern design and inside arc transverse grooves design improve water evacuation. The outside Z-steal design improves grip effectively.
- The center flat pattern block enhances handling and stability on straight driving.
- Open-type shoulder grooves dissipate heat on high speed driving and enhance water evacuation.
- Rational groove depth and pattern design offer longer mileage.



SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )	
185/60R14	82	H	-	TBA	5 1/2J	51	1047	22.8	7.4	9.9	11.59
185/65R14	86	H	-	TBA	5 1/2J	51	1168	23.5	7.4	9.9	11.59
175/65R15	84	H	-	TBA	5 1/2J	51	1102	24.0	7.0	9.8	13.45
18/55R515	82	V	-	TBA	6 J	51	1047	23.0	7.6	9.9	13.86
185/65R15	88	H	-	TBA	5 1/2J	51	1235	24.4	7.4	9.9	11.59
195/50R15	82	H	-	TBA	6 J	51	1047	22.7	7.9	10.0	11.59
195/55R15	85	V	-	TBA	6 J	51	1135	23.4	7.9	10.0	11.59
195/60R15	88	H	-	TBA	6 J	51	1235	24.2	7.9	10.0	12.98
195/65R15	91	H	-	TBA	6 J	51	1356	25.0	7.9	10.0	13.45
205/60R15	91	H	-	TBA	6 J	51	1356	24.7	8.2	10.1	13.45
205/65R15	94	H	-	TBA	6 J	51	1477	25.5	8.2	10.1	13.86
215/60R15	94	H	-	TBA	6 1/2J	51	1477	25.2	8.7	10.3	13.86
195/50R16	84	V	-	TBA	6 J	51	1102	23.7	7.9	10.0	13.86
195/55R16	87	V	-	TBA	6 J	51	1201	24.4	7.9	10.0	11.59
205/50R16	87	V	-	TBA	6 1/2J	51	1201	24.1	8.4	10.1	12.98
205/55R16	91	V	-	TBA	6 1/2J	51	1356	24.9	8.4	10.1	13.45
205/60R16	92	V	-	TBA	6 1/2J	51	1389	25.7	8.2	10.1	13.48
205/65R16	95	H	-	TBA	6 J	51	1521	26.5	8.2	10.1	13.48
215/55R16	97	H	-	TBA	7 J	50	1609	25.3	8.9	10.3	13.86
215/60R16	95	V	-	TBA	6 1/2J	51	1521	26.1	8.7	10.3	13.86
215/65R16	98	H	-	TBA	6 1/2J	51	1653	27.0	8.7	10.3	13.86
225/55R16	95	V	-	TBA	7 J	51	1521	25.7	9.2	10.4	13.86
225/60R16	98	H	-	TBA	6 1/2J	51	1653	26.6	9.0	10.4	13.86
225/65R16	100	H	-	TBA	6 1/2J	51	1764	27.5	9.0	10.4	13.48
235/60R16	100	H	-	TBA	7 J	51	1764	27.1	9.4	10.5	13.48
205/50R17	93	V	-	TBA	6 1/5J	50	1433	25.1	8.4	10.1	14.74
215/45R17	91	V	-	TBA	7 J	50	1356	24.6	8.4	10.3	13.86
215/50R17	95	V	-	TBA	7 J	50	1521	25.5	8.9	10.3	14.74
215/55R17	94	V	-	TBA	7 J	51	1477	26.3	8.9	10.3	14.74
225/45R17	94	V	-	TBA	7 1/2J	50	1477	25.0	8.9	10.4	15.5
225/50R17	98	V	-	TBA	7 J	51	1477	25.9	9.2	10.4	16
225/55R17	97	V	-	TBA	7 J	51	1609	26.8	9.2	10.4	16
225/60R17	99	H	-	TBA	6 1/2J	51	1709	27.6	9.0	10.4	16
225/65R17	102	H	-	TBA	6 1/2J	51	1874	28.5	9.0	10.4	14.74
235/45R17	97	V	-	TBA	8 J	50	1609	25.4	9.3	10.5	15.5
235/55R17	99	V	-	TBA	7 1/2J	51	1709	27.2	10.0	10.5	15.5
235/60R17	102	H	-	TBA	7 J	51	1874	28.1	9.4	10.5	16
235/65R17	104	H	-	TBA	7 J	51	1984	29.1	9.4	10.5	16
245/45R17	99	V	-	TBA	8 J	50	1709	25.7	9.6	10.6	16
245/50R17	99	V	-	TBA	7 1/2J	51	1709	26.7	10.0	10.6	16
225/40R18	92	V	-	TBA	8 J	50	1389	25.1	9.1	10.4	16
225/45R18	95	V	-	TBA	7 1/2J	50	1521	25.9	8.9	10.4	16
225/50R18	99	V	-	TBA	7 J	50	1709	26.9	9.2	10.4	16
225/55R18	98	V	-	TBA	7 J	51	1653	27.8	9.2	10.4	16
225/60R18	100	H	-	TBA	6 1/2J	51	1764	28.6	9.0	10.4	16
235/40R18	95	V	-	TBA	8 1/2J	50	1521	25.4	9.5	10.5	16
235/45R18	94	V	-	TBA	8 J	51	1477	26.3	9.3	10.5	16
235/50R18	97	V	-	TBA	7 1/2J	51	1609	27.3	9.6	10.5	16
235/55R18	100	V	-	TBA	7 1/2J	51	1764	28.1	9.6	10.5	16
235/60R18	103	V	-	TBA	7 J	51	1929	29.1	9.4	10.5	16
245/40R18	97	V	-	TBA	8 1/2J	50	1609	25.7	9.8	10.6	16
245/45R18	100	V	-	TBA	8 J	50	1764	26.7	9.6	10.6	16
235/55R19	101	V	-	TBA	7 1/2J	51	1819	29.2	9.6	10.5	16
245/40R19	98	V	-	TBA	8 1/2J	50	1653	26.7	9.8	10.6	16
255/50R19	107	V	-	TBA	8 J	50	2149	29.1	10.4	10.8	16
245/45R20	99	V	-	TBA	8 J	51	1709	28.7	9.6	10.6	16
245/50R20	102	V	-	TBA	7 1/2J	51	1874	29.7	10.0	10.6	16



### FORCE UHP

- Asymmetric tread pattern design offers excellent traction and handling performance.
- Transverse grooves reduce rolling resistance across multiple terrain, providing enhanced performance throughout the tire's life.
- Tread compound formulation improves adaptability to exterior conditions.

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )
195/45R16	84	V	-							Coming Soon!
205/50R16	87	W	-	TBA	6 1/2J	51	1201	24.1	9.8	8.4
205/55R16	91	W	-	TBA	6 1/2J	51	1356	24.9	9.8	8.4
215/50R16	94	W	-							Coming Soon!
215/55R16	97	W	-	TBA	7J	50	1609	25.3	9.8	8.9
225/50R16	92	W	-	TBA	7J	51	1389	24.8	10	9.2
225/55R16	95	W	-	TBA	7J	51	1521	25.7	10	9.2
195/40R17	81	V	-							Coming Soon!
195/45R17	85	W	-							Coming Soon!
205/45R17	88	W	-	TBA	7	50	1235	26.3	9.8	8.1
205/50R17	93	W	-	TBA	7.5	50	1433	24.8	9.8	8.4
215/45R17	91	W	-	TBA	7J	50	1356	24.6	9.8	8.4
215/50R17	95	W	-	TBA	7J	50	1521	25.5	9.8	8.9
215/55R17	94	W	-	TBA	7	51	1477	26.3	9.8	8.9
225/45R17	94	W	-	TBA	7 1/2J	50	1477	25	10	8.9
225/50R17	98	W	-	TBA	7J	50	1653	25.9	10	9.2
225/55R17	97	W	-	TBA	7J	51	1609	26.8	10	9.2
235/45R17	97	W	-	TBA	8J	50	1609	25.4	10	9.3
235/50R17	96	W	-	TBA	7 1/2J	51	1565	26.3	10	9.6

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )
235/55R17	99	W	-	TBA	7 1/2J	51	1709	27.2	10	9.6
245/40R17	91	W	-	TBA	8 1/2J	51	1356	24.7	10.3	9.8
245/45R17	99	W	-	TBA	8J	50	1709	25.7	10.3	9.6
245/65R17	111	H	-							Coming Soon!
255/40R17	98	W	-							Coming Soon!
275/40R17	98	W	-	TBA	9 1/2J	51	1653	25.7	10.5	10.9
195/35R18	88	W	-							Coming Soon!
205/35R18	88	W	-							Coming Soon!
205/40R18	86	W	-							Coming Soon!
215/40R18	85	Y	-	TBA	7 1/2J	51	1135	24.8	9.8	8.6
215/45R18	93	Y	-	TBA	7J	50	1433	25.6	9.8	8.4
225/35R18	87	W	-							Coming Soon!
225/40R18	92	Y	-	TBA	8J	50	1389	25.1	10	9.1
225/45R18	95	Y	-	TBA	7 1/2J	50	1521	26	10	8.9
225/50R18	95	W	-	TBA	7J	51	1521	26.9	10	9.2
235/40R18	95	Y	-	TBA	8 1/2J	50	1521	25.4	10	9.5
235/45R18	98	Y	-	TBA	8J	50	1653	26.3	10	9.3
235/50R18	97	Y	-	TBA	7 1/2J	51	1609	27.2	10	9.6
245/40R18	97	Y	-	TBA	8 1/2J	50	1609	25.7	10.3	9.8
245/45R18	100	Y	-	TBA	8J	50	1764	26.7	10.3	9.6
245/50R18	100	Y	-	TBA	7 1/2J	51	1764	27.6	10.3	10
255/35R18	94	Y	-	TBA	9J	50	1477	25	10.3	10.2
255/40R18	99	Y	-	TBA	9J	50	1709	26	10.3	10.2
255/45R18	103	W	-	TBA	8 1/2J	50	1929	27	10.3	10
255/55R18	109	W	-	TBA	8J	50	2271	29.1	10.3	10.4
265/35R18	97	W	-	TBA	9 1/2J	50	1609	25.3	10.5	10.7
265/40R18	101	Y	-	TBA	9 1/2J	50	1819	26.3	10.5	10.7
275/35R18	95	Y	-	TBA	9 1/2J	51	1521	25.6	10.5	10.9
275/40R18	103	Y	-	TBA	9 1/2J	50	1929	26.7	10.5	10.9
305/30R18	97	W	-							Coming Soon!
215/35R19	85	V	-							Coming Soon!
225/35R19	88	W	-							Coming Soon!
225/40R19	93	Y	-	TBA	8J	50	1433	26.1	10	9.1
225/45R19	96	Y	-	TBA	7 1/2J	50	1565	27	10	8.9
235/35R19	91	Y	XL	520/AA/A	8.5J	50	1356	25.47	9.49	10.1
235/40R19	96	Y	-	TBA	8 1/2J	50	1565	26.4	10	9.5
235/55R19	105	Y	-	TBA	7 1/2J	50	2039	29.2	10	9.6
245/35R19	93	W	XL	520/AA/A	8.5J	50	1433	25.79	9.76	10.1
245/40R19	98	Y	-	TBA	8 1/2J	50	1653	26.7	10.3	9.8
245/45R19	102	W	-	TBA	8J	50	1874	27.7	10.3	9.6
245/50R19	105	W	-	TBA	7 1/2J	50	2039	28.7	10.3	10
245/55R19	103	V	-							Coming Soon!
255/35R19	96	Y	-	TBA	9J	50	1565	26.1	10.3	10.2
255/40R19	100	Y	-	TBA	9J	50	1764	27	10.3	10.2
255/45R19	104	Y	-	TBA	8 1/2J	50	1984	28.1	10.3	10
255/50R19	107	Y	-	TBA	8J	50	2149	29.1	10.3	10.4
255/60R19	109	H		520/AA/A	7.5J	51	2271	31.06	10.24	10.7
265/30R19	93	W	XL	520/AA/A	9.5J	50	1433	25.31	10.67	10.1





## FORCE UHP (CONTINUED)

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )
265/40R19	102	Y	-	TBA	91/2J	50	1874	27.4	10.5	10.7
265/50R19	110	Y	-	TBA	81/2J	50	2337	29.4	10.5	10.9
275/30R19	96	W	-	Coming Soon!						
275/35R19	100	Y	-	TBA	91/2J	50	1764	26.6	10.5	10.9
275/40R19	105	Y	-	TBA	91/2J	50	2039	27.7	10.5	10.9
275/45R19	108	W	XL	520/AA/A	9J	50	2205	28.78	10.75	10.7
275/55R19	111	W		520/AA/A	8.5J	51	2403	30.91	11.18	10.7
285/35R19	103	Y	-	TBA	10J	50	1929	26.9	10.8	11.4
285/45R19	111	W		520/AA/A	9.5J	50	2403	29.09	11.22	10.7
295/30R19	100	W	XL	520/AA/A	10.5J	50	1764	26.02	11.85	10.1
215/30R20	82	W	-	Coming Soon!						
225/30R20	85	W	-	TBA	8J	50	1135	25.3	10	9.1
225/35R20	90	W	-	TBA	8J	50	1323	26.2	10	9.1
235/30R20	88	W	XL	520/AA/A	8.5J	50	1235	25.59	9.53	10.1
235/35R20	92	W	XL	520/AA/A	8.5J	50	1389	26.46	9.49	10.1
245/30R20	90	W	XL	520/AA/A	8.5J	50	1323	25.83	9.76	10.1
245/35R20	95	W	-	TBA	81/2J	50	1521	26.8	10.3	9.8
245/40R20	99	Y	-	TBA	81/2J	50	1709	27.7	10.3	9.8
245/45R20	103	Y	-	TBA	8J	50	1929	28.7	10.3	9.6
245/50R20	102	V		520/AA/A	7.5J	51	1874	29.69	9.96	10.7
255/30R20	92	W	XL	520/AA/A	9J	50	1389	26.06	10.24	10.1
255/35R20	97	Y	-	TBA	9J	50	1609	27	10.3	10.2
255/40R20	101	W	XL	520/AA/A	9J	50	1819	28.03	10.24	10.7

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32 <sup>nd</sup> )
255/45R20	105	Y	-	TBA	81/2J	50	2039	29.1	10.3	10
255/50R20	109	Y	-	TBA	8J	50	2271	30	10.3	10.4
265/35R20	99	Y	-	TBA	91/2J	50	1709	27.3	10.5	10.7
265/45R20	108	Y	-	TBA	9J	50	2205	29.4	10.5	10.5
265/50R20	112	V	-	Coming Soon!						
275/30R20	97	Y	-	TBA	91/2J	50	1609	26.5	10.5	10.9
275/35R20	102	Y	-	TBA	91/2J	50	1874	27.6	10.5	10.9
275/40R20	106	Y	-	TBA	91/2J	50	2094	28.7	10.5	10.9
275/45R20	110	W	-	TBA	9J	50	2337	29.8	10.5	10.7
285/25R20	93	W	XL	520/AA/A	10.5J	50	1433	25.59	11.61	10.1
285/50R20	112	V	-	Coming Soon!						
295/25R20	95	Y	XL	520/AA/A	10.5J	50	1521	25.83	11.85	10.1
305/25R20	97	Y		520/AA/A	11J	50	1609	25.98	12.32	10.7
315/35R20	110	W	XL	520/AA/A	11J	50	2337	28.66	12.6	10.7
235/35R21	89	W	-	Coming Soon!						
245/30R21	95	W	-	Coming Soon!						
245/35R21	96	W	XL	520/AA/A	8.5J	50	1565	27.76	9.76	10.1
255/30R21	93	W	XL	520/AA/A	9J	50	1433	27.05	10.24	10.1
265/40R21	105	V	-	Coming Soon!						
275/35R21	99	W	-	Coming Soon!						
285/30R21	100	Y	XL	520/AA/A	10J	50	1764	27.76	11.42	10.1
295/35R21	107	Y	-	TBA	101/2J	50	2149	29.1	10.8	11.9
245/30R22	92	W	-	TBA	81/2J	50	1389	27.8	10.3	9.8
255/30R22	95	W	-	TBA	9J	50	1521	28	10.3	10.2
265/30R22	97	W	XL	520/AA/A	9.5J	50	1609	28.31	10.67	10.1
265/35R22	102	V	XL	520/AA/A	9.5J	50	1874	29.33	10.67	10.1
265/40R22	106	V	XL	520/AA/A	9.5J	50	2094	30.35	10.67	10.7
285/25R22	95	Y		520/AA/A	10.5J	50	1521	27.6	11.61	10.1
285/35R22	106	W	-	TBA	10J	50	2094	29.9	10.8	11.4
285/40R22	110	V		520/AA/A	10J	50	2337	30.98	11.42	10.7
285/45R22	114	V	XL	520/AA/A	9.5J	50	2601	32.09	11.22	10.7
295/25R22	97	W	XL	520/AA/A	10.5J	50	1609	27.83	11.85	10.1
305/25R22	99	Y	XL	520/AA/A	11J	50	1709	27.99	12.32	10.7
305/40R22	114	V	-	Coming Soon!						
305/45R22	118	V	XL	520/AA/A	10J	50	2910	32.8	11.93	10.7
255/30R24	97	W	-	TBA	9J	50	1609	30	10.3	10.2
275/25R24	96	W	XL	520/AA/A	10J	50	1565	29.45	11.14	10.7
275/30R24	101	W	XL	520/AA/A	9.5J	50	1819	30.55	10.94	10.7
295/35R24	110	V	XL	520/AA/A	10.5J	50	2337	32.13	11.85	10.7
305/35R24	112	V	XL	520/AA/A	11J	50	2469	32.44	12.32	10.7
255/30R26	100	W	XL	520/AA/A	9J	50	1709	32.17	10.24	10.7
275/25R26	98	W	XL	520/AA/A	10J	50	1653	31.42	11.14	10.7
295/30R26	107	W	XL	520/AA/A	10.5J	50	2149	32.99	11.85	10.7
305/30R26	109	W	XL	520/AA/A	11J	50	2271	33.23	12.32	10.7
275/25R28	102	W		520/AA/A	10J	50	1709	33.54	11.14	10.7
295/25R28	103	V	-	TBA	101/2J	51	1929	33.8	10.8	11.9
275/25R30	101	W	-	TBA	10J	51	1819	35.4	10.5	11.1

## PRIVA HT II

- Four wide vertical grooves uplift the draining capability and effectively reduce the chance of aquaplaning.
- Optimized pattern pitch distribution and pitch ratio makes driving more comfortable with lower noise.
- Big pattern blocks on the shoulder increase traction and cornering performance.

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)
255/70R15	108	T	-	500/A/B	7 1/2J	36	2205	29	10.24	12.00
215/70R16	100	T	-	460/A/B	6 1/2J	36	1764	28	8.7	11.30
225/70R16	107	T	XL	500/A/B	6 1/2J	42	2149	28	8.98	12.00
235/70R16	109	T	XL	500/A/B	7J	42	2271	29	9.45	12.00
245/70R16	111	T	XL	500/A/B	7J	36	2337	30	9.76	12.00
245/75R16	111	T	-	500/A/B	7J	36	2337	30	9.76	12.00
255/70R16	111	T	-	500/A/B	7 1/2J	36	2403	30	10.24	12.00
265/70R16	112	T	-	500/A/B	8J	36	2469	31	10.71	12.00
LT215/85R16	115/112	Q	10PR	-	6J	80	2680	30	8.50	14.10
LT225/75R16	115/112	Q	10PR	-	6J	80	2680	29	8.78	14.10
LT235/85R16	120/116	R	10PR	-	6 1/2J	80	3042	32	9.25	14.10
LT245/75R16	120/116	R	10PR	-	7J	80	3042	30	9.76	14.10
LT265/75R16	123/120	R	10PR	-	7 1/2J	80	3415	32	10.51	14.10
245/70R17	110	T	-	500/A/B	7J	36	2337	31	9.76	12.00
265/65R17	112	H	-	500/A/B	8J	36	2469	31	10.71	12.00
265/70R17	115	T	-	500/A/B	8J	36	2679	32	10.8	13.23
275/65R17	119	H	-	500/A/B	8J	42	3000	31	10.98	12.00
285/65R17	116	S	-	500/A/B	8 1/2J	36	2756	32	11.5	12.00
LT265/70R17	121/118	R	10PR	-	8J	80	3195	32	10.71	14.10
275/55R20	117	V	-	460/A/B	8 1/2J	42	2833	32	11.8	11.30

## PRIVA AT

- The designed pattern blocks ensure the driving power on various road surfaces.
- The large angled grooves increase the three-dimensional appeal and guarantee drainage too.
- Newly developed compounds satisfy wear resistance, wet grip and effectively control noise level.

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)
235/75R15	109T	T	-	460/A/B	6 1/2J	42	2271	29	9.25	13.90
31X10.50R15LT	109R	R	6PR	-	8 1/2J	51	2270	31	10.55	16.00
205R16LT	110/108	T	8PR	-	6J	65	2337	29	8.19	16.00
235/70R16	106	T	-	460/A/B	7J	36	2094	29	9.45	13.90
245/70R16	111	T	-	520/A/B	7J	42	2403	30	9.76	13.90
265/70R16	112	T	-	520/A/B	8J	36	2469	31	10.71	13.90
LT235/85R16	120/116	Q	10PR	-	6 1/2J	80	3042	32	9.25	16.00
LT245/75R16	120/116	Q	10PR	-	7J	80	3042	30	9.76	16.00
LT265/75R16	123/120	R	10PR	-	7 1/2J	80	3417	32	10.51	16.00
LT285/75R16	126/123	R	10PR	-	8J	80	3750	33	11.26	16.00
245/65R17	111	T	-	520/A/B	7J	42	2403	30	9.76	13.90
265/70R17	115	T	-	520/A/B	8J	36	2679	32	10.71	13.90
LT265/70R17	121/118	R	10PR	-	8J	80	3195	32	10.71	16.00



## PRIVA MT

- Mainly used on muddy and rocky roads.
- Shallow central grooves plus strong shoulder blocks enhance puncture resistances and self-cleaning of tire.
- Wide pattern blocks provide strong traction on unpaved roads.
- The unique design not only protects sidewall from wearing, but ensures the artistic appearance.

SIZE	Load Index	Speed Index	PR	UTQG	Standard Rim	Max Air (psi)	Max Single Load (lbs)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)
31X10.50R15LT	109	Q	6PR	-	81/2J	51	2270	30.75	10.47	18.02
33X12.50R15LT	108	Q	6PR	-	10J	51	2205	32.76	12.44	18.02
35X12.50R15LT	113	Q	-	Coming Soon!						
LT265/75R16	123/120	Q	10PR	-	71/2J	80	3415	31.89	10.43	18.02
LT285/75R16	126/123	Q	10	TBA	8J	80	3750	33.07	18.02	11.18
LT305/70R16	124/121	Q	8	TBA	9J	80	2910	33.07	18.02	12.17
LT315/75R16	127/124	Q	8	TBA	8 1/2J	51	1874	34.8	18.02	12.24
LT375/65R16	126/123	Q	-	Coming Soon!						
35X12.50R17LT	121	Q	10PR	-	10J	65	3195	34.77	12.44	19.91
37X12.50R17LT	124	Q	-	Coming Soon!						
40X13.50R17LT	121	Q	-	Coming Soon!						
LT265/70R17	121/118	Q	6	TBA	8J	80	3195	31.89	18.02	10.63
LT285/70R17	121/118	Q	8	TBA	8 1/2J	65	3195	32.99	18.02	11.42
LT295/70R17	121/118	Q	-	Coming Soon!						
LT305/65R17	121/118	Q	-	Coming Soon!						
LT315/70R17	121/118	Q	-	Coming Soon!						
33X12.50R18LT	118	Q	10PR	-	10J	65	2910	32.76	12.44	19.91
35X12.50R18LT	123	Q	10PR	-	10J	65	3415	34.77	12.44	19.91
37X13.50R18LT	124	Q	-	Coming Soon!						
LT275/70R18	125/122	Q	10	TBA	8J	80	3640	33.43	18.02	10.91
LT295/70R18	129/126	Q	-	Coming Soon!						
LT305/60R18	121/118	Q	-	Coming Soon!						
LT305/70R18	126/123	Q	-	Coming Soon!						
33X12.50R20LT	114	Q	10PR	-	10J	65	2600	32.76	12.44	19.91
35X12.50R20LT	121	Q	10PR	-	10J	65	3195	34.77	12.44	19.91
36X15.50R20LT	126	Q	-	Coming Soon!						
37X13.50R20LT	127	Q	-	Coming Soon!						
38X15.50R20LT	128	Q	8	TBA	12J	65	3640	37.76	19.91	15.28
40X14.50R20LT	128	Q	-	Coming Soon!						
LT295/60R20	126/123	Q	-	Coming Soon!						
33X12.50R22	109	Q	10PR	-	10J	65	2270	32.76	12.44	19.91
35X12.50R22	117	Q	10PR	-	10J	65	2835	34.77	12.44	19.91



*The world rides on Atlas!*



Rely only on high-grade car and truck tires offered on our virtual shelves.