




**Installation Manual v1.1:  
Wastegate Actuator Sensor Jumper  
2003 – Up Dodge**

**Please read all instructions before installation.**

1. The factory turbo uses a wastegate sensor in the compressor housing. The ATS turbo kit does not require this sensor to operate. If the sensor is unplugged, the computer will see an open circuit and send a trouble code. Use the jumper included in this kit to complete the circuit. **Plug in the jumper to the engine harness. Discard the factory sensor.**

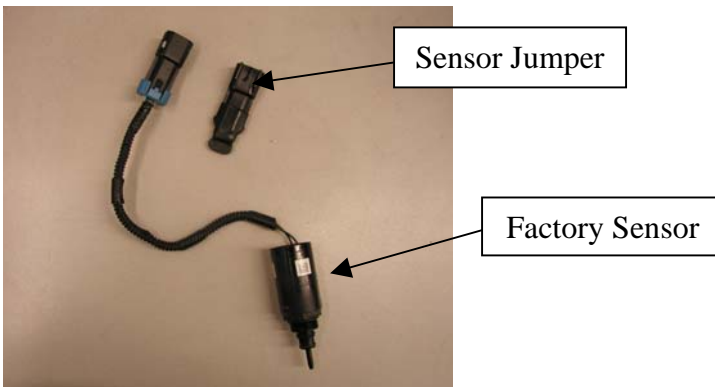

2. The sensor is located in the front of the compressor housing as show below and connects to the harness behind the oil filter.

