

ATTURO TIRES



2025

DESIGNED FOR WHATEVER TERRAIN YOU WISH TO CONQUER, THESE TIRES ARE READY FOR EVERYTHING FROM EXTREME TERRAINS TO THE DAILY DRIVE.

TABLE OF CONTENT:

Trail Blade BOSS 02
 Trail Blade MTS 03
 Trail Blade M/T 04
 Trail Blade X/T 05
 Trail Blade ATS 06
 Trail Blade A/T 07
 Trail Blade H/T 08



TRAIL BLADE SERIES

TRAIL BLADE BOSS

LOOKS GREAT EVEN WHEN THINGS GET UGLY

Take control of the toughest terrain with a mighty off-road tread.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- SPLIT CENTER BLOCK FLOWS**
Allows water and debris to flow through, while maintaining rigidity when mountain climbing.
- WAVE CHANNEL GRIPS**
Improves traction and mitigates road thunder (at least a little).
- OVERSIZED TREAD BLOCK CRUSHES**
Provides the most robust, terrain-crushing power in the Trail Blade lineup.



TRAIL BLADE MTS

MUD WRESTLER DESIGNED TO DOMINATE

Cut through the slop with a heavy-duty tire that's ideal for trucks and off-road vehicles.



SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

- SERRATED EDGE CUTS**
Encourages off-road mayhem.
- SIPE COMBINATION CLEARS**
Enhances traction in wet conditions, on or off-road.
- QUAD CENTER GRABS**
Boasts a unique look and doubles the biting edge grip.



TRAIL BLADE MIT

MENACING STYLE TREATS MUD LIKE DIRT

An affordable performance tire that's purpose-built for the messiest terrain.



SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

- AGGRESSIVE TREAD GRIPS**
Plows through just about anything you might encounter on the trail.
- BEVELED EDGE BITES**
Provides lateral grip when turning, especially on soft surfaces.
- OPEN SHOULDER DRAINS**
Helps eject mud, water, rocks, dirt, and more, providing easy cleanout and enhanced grip.



TRAIL BLADE X/T

THE ULTIMATE MULTI-TERRAIN

From mud to dirt to highway, enjoy the best of all possible rides.



45K MILE WARRANTY
TRAIL BLADE X/T



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- CENTER TREAD BLOCK STABILIZES**
Improves stability on the highway by reducing tread squirm.
- BLOCK SHAPE QUIETS**
Finely sliced blocks reduce noise and allow water to flow out of the contact area.
- LARGE SHOULDER BLOCK GRIPS**
Delivers solid traction in offroad conditions.



TRAIL BLADE ATS

STRIKING LOOK THAT DOES THE DIRTY WORK

Super sharp and tough, here's a stylishly aggressive tire that's ready for action on or off the asphalt.



50K MILE WARRANTY
TRAIL BLADE ATS



ONLY 2024 OR NEWER PRODUCTION TIRES WILL BEAR THE 3PMS SYMBOL



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- WIDE CHANNEL FLUSHES**
Reduces noise and stops debris from taking a free ride.
- CENTER RIB STABILIZES**
Provides enhanced steering response and tire rigidity.
- SHOULDER BLOCK GRINDS**
Delivers consistent traction in all types of conditions.



TRAIL BLADE A/T

DURABLE ALL-TERRAIN FOR WORK OR PLAY

The perfect fit for drivers who demand robustness, endurance, and outstanding performance in any driving conditions.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- CENTER TREAD CONTROLS**
Interlocked for stability and siped for traction in any weather condition.
- WIDE CHANNEL VACUUMS**
Linked to the lateral channels to vacuum water from the contact patch.
- JAGGED SIPE GRIPS**
Delivers optimal traction in all seasons.



TRAIL BLADE H/T

UNLEASH ADVENTURE ANY ROAD, ANY SEASON

All-weather grip meets all-terrain freedom. Enjoy a smooth, quiet, long-lasting ride perfect for highway cruising and the occasional dirt road adventure.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- 3 LINKED CENTER RIBS CONTROL**
Delivers predictable handling and straight-line feel by being linked together to reduce tread squirm and provide additional stability.
- 3-D SIPES GRIP**
Provides additional biting edges in wet, snowy, or icy conditions while reducing noise and enhancing the driving experience throughout the tire's entire tread life.
- 4 CIRCUMFERENTIAL GROOVES EVACUATE**
Clears the contact patch of snow, slush, and water to ensure a constant, predictable, and controllable ride in any weather condition.



BORN FROM THE SAME DNA AS THEIR LT COUNTERPARTS, THE SXS SERIES OF TIRES FEATURES RACE-INSPIRED DESIGNS, 8PR STEEL BELTED CONSTRUCTION, AN INTEGRATED RIM GUARD, AND TRAIL HAZARD™ PROTECTION SPECIFICALLY FOR THE MODERN UTV!

TABLE OF CONTENT:

- Trail Blade Boss SXS 10
- Trail Blade X/T SXS 11



TRAIL BLADE SXS

TRAIL BLADE BOSS SXS

RELENTLESS POWER WITH NO COMPROMISES

Plow through deep mud, sand, and rocks with the ultimate off-road tread at your side.
*Non-DOT



24-Month Trail Hazard™ Protection included at no additional charge with your Atturo Trail Blade SXS Tires. To learn more, visit Atturo.com/Trailhazard



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- HIGH VOID RATIO BITES**
Creates massive biting edges and a tread pattern that cleans out with ease.
- SPLIT TREAD BLOCKS CLEAR**
Allows water and debris to flow through without sacrificing tread strength.
- ALTERNATING SHOULDER GRABS**
Tackles extreme terrain with the crushing power the Trail Blade BOSS is known for.



TRAIL BLADE X/T SXS

VERSATILE DESIGN FOR ANY TERRAIN

Outfit your UTV with a stylishly versatile tire built to perform while still delivering a stable, confident ride. *Non-DOT



24-Month Trail Hazard™ Protection included at no additional charge with your Atturo Trail Blade SXS Tires. To learn more, visit Atturo.com/Trailhazard



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- HYBRID PATTERN EXCELS**
Offers 90% of the off-road traction of an M/T, with a smoother ride on hard pack.
- SIPING AND STUD PINS GRIP**
Delivers elite traction and grip in rain, shine, or snow (especially when studded).
- LARGE SHOULDER BLOCKS DIG**
Provides exceptional traction in offroad conditions, similar to that of an M/T.



PERFORMANCE IS THE GAME AND THESE TIRES ARE WRITING THE RULES. WHETHER IT'S ON THE HIGHWAY OR RACEWAY, THESE TIRES ARE HERE TO PLAY.

TABLE OF CONTENT:

| | |
|----------|----|
| AZ850 DR | 13 |
| AZ850 | 14 |
| AZ810 | 15 |
| AZ610 | 16 |
| AZ600 | 17 |



AZ SERIES

AZ SERIES AZ850DR

A COMPLEMENT THAT REALLY STICKS

A rear-axle complement to the AZ850 on extra-sticky drag radials deliver elite stability from start to finish.
*DOT-Compliant



AZ850 Ultra-High Performance tire featured on the front wheels for the perfect pairing on your speed machine



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- EXTRA-WIDE CENTER STABILIZES**
Delivers improved, handling, and "on center" feel at race speeds.
- DUAL WIDE CHANNELS QUIETS**
Reduces tire noise both on the road and on the drag strip.
- DIRECTIONAL SHOULDER GRIPS**
Generates immediate launching traction with the help of an extra sticky compound.



AZ SERIES AZ850

THE STRONG & SILENT TYPE

This ultra-high performance tire delivers secure braking, handling, and durability.



Power-hungry handling for Sport Trucks, SUVs, Crossovers, & Muscle Cars.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- CENTER TREAD STABILIZES**
Improves straight-line stability for a solid "on center" feel.
- MAIN CHANNEL FLUSHES**
Provides increased grip in wet road conditions.
- SHOULDER TREAD BLOCK CORNERS**
Remains rigid under stress for precise and predictable turning.



AZ SERIES AZ810

THE ALL-WEATHER CHAMPION

Unlock peak Ultra-High-Performance for any vehicle, no matter the weather. Experience confident braking, precision handling, and a quiet journey on every road.



45K
MILE WARRANTY
AZ810

Engineered to include electric and plug-in hybrid vehicles, this tire delivers powerful handling that embraces the future of driving.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- 3-D SIPING GRIPS**
Provides superior all weather traction throughout the life of the tire.
- ASYMMETRIC PATTERN CONTROLS**
Delivers confident and predictable handling in wet, dry, or snowy road conditions.
- PITCHED TREAD BLOCKS QUIET**
Acoustically optimized tread design with variable pitching delivers a quiet ride for EV and Hybrid vehicles.



AZ SERIES AZ610

GO ON TOUR

A super sharp all season tire that delivers a smooth, quiet ride.



60K
MILE WARRANTY
AZ610



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- SLOPED SHOULDER CORNERS**
Provides stable steering during aggressive cornering.
- RIB SLOT QUIETS**
Helps reduce road noise at both high and low speeds.
- GROOVE FLUSHES**
Improves water and slush evacuation while enhancing straight-line stability.



AZ SERIES AZ600

PERFORMANCE, STYLE, AND COMFORT.

Experience the ultimate blend of style and performance with this super sharp all-season tire, providing a smooth and tranquil journey.



SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

- OUTSIDE RIBS HOLD**
Center ribs work together to maintain a constant clear contact patch while providing stability at any speed.
- SIPES BITE**
Elongated shoulder block sipes work with smaller center tread sipes to offer stable all-weather traction.
- GROOVE FLUSHES**
Four circumferential grooves flush out water and slush to enhance stability.



ONE OF THE FASTEST-GROWING VEHICLE SEGMENTS,
URBAN UTILITY VANS REQUIRE TIRES TO CARRY HEAVY
LOADS AT HIGH CENTERS OF GRAVITY.

TABLE OF CONTENT:

| | |
|-------------|----|
| CV400 | 19 |
| ST300 | 20 |



Trail Blade ATS, AT and HT
have sizes that are also available for
commercial vehicles and are 3PMS.



FLEETLINE SERIES

FLEETLINE CV400

VANTASTIC PERFORMANCE

Maintain your Euro-C equipped fleet with a tire that can take heavy loads while delivering a smooth ride in wet and dry conditions.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- SHOULDER BLOCKS HANDLE**
Provides excellent traction in wet and dry conditions.
- CIRCUMFERENTIAL GROOVES EXPELS**
3 Circumferential grooves work with shoulder channels to keep the contact patch clean and dry for improved traction and braking.
- INTERLOCKING TREAD STABILIZES**
Optimized for high load-carrying capacity.



FLEETLINE ST300

WORK HARD PLAY HARDER

Engineered to handle heavy loads with ease, while providing a smooth ride in all conditions.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

- CHANNELS CLEANS**
Provides excellent traction in wet and dry conditions.
- CENTER RIB STABILIZES**
Tracks your tow vehicle on the highway and keeps your trailer stable behind you.
- INTERLOCKING TREAD QUIETS**
Keeps your ride smooth and easy.



TIRE SPECIFICATIONS

| | | |
|----------------------------------|--------------------------------------|--------------------------|
| Trail Blade BOSS 21 | Trail Blade H/T 26 | AZ810 30-31 |
| Trail Blade MTS 21 | Trail Blade Boss SXS 27 | AZ610 32 |
| Trail Blade M/T 22 | Trail Blade X/TSXS 27 | AZ600 33 |
| Trail Blade X/T 23 | AZ850 DR 28 | CV400 34 |
| Trail Blade ATS 24 | AZ850 28-30 | ST300 34 |
| Trail Blade A/T 25 | | |



TRAIL BLADE BOSS

See page 2 for more Trail Blade BOSS details

| | Atturo Item Number | Size | Load Index/Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|-----|--------------------|-------------------|-------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|------|
| | TBBO-J5QE7ATA | 37x12.50R17LT | 124Q | 8 PR | 36.5 | 12.5 | 10.0 | 9.5 - 10.5 | 22 | 73.4 | 50 | 3527 | - | |
| 17" | TBBO-LMFY6MB | 37x12.50R17LT RWL | 124Q | 8 PR | 36.5 | 12.5 | 10.0 | 9.5 - 10.5 | 22 | 73.4 | 50 | 3527 | - | |
| | TBBO-J53G7ATA | 40x13.50R17LT | 136Q | 10 PR | 39.8 | 13.6 | 11.0 | 8.5 - 11.0 | 22 | 102.0 | 65 | 4938 | - | |
| 18" | TBBO-J53E8ATA | 37x13.50R18LT | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 10.5 - 11.5 | 22 | 80.5 | 65 | 3968 | - | |
| | TBBO-PK5Y6MB | 37x13.50R18LT RWL | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 10.5 - 11.5 | 22 | 80.5 | 65 | 3968 | - | |
| 20" | TBBO-J56FOAFA | 38x14.50R20LT | 124Q | 8 PR | 37.8 | 14.6 | 12.0 | 10.0 - 12.0 | 22 | 90.4 | 50 | 3527 | - | |
| | TBBO-J56GOAFA | 40x14.50R20LT | 129Q | 8 PR | 39.8 | 14.6 | 12.0 | 10.0 - 12.0 | 22 | 96.1 | 50 | 4079 | - | |

TRAIL BLADE MTS

See page 3 for more Trail Blade MTS details

| | Atturo Item Number | Size | Load Index/Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|-----|--------------------|---------------|-------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| 17" | TBMS-LMFT2MA | 37x12.50R17LT | 124Q | 8 PR | 36.5 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 74.4 | 50 | 3527 | - | - |
| | TBMS-ML5T2MA | LT325/65R18 | 127/124T | 10 PR | 34.6 | 13.0 | 9.5 | 9.0 - 12.0 | 21 | 75.8 | 65 | 3858 | 3527 | - |
| 18" | TBMS-LH5T2MA | 33x12.50R18LT | 122Q | 12 PR | 32.5 | 12.5 | 10.0 | 8.5 - 11.0 | 22 | 67.8 | 80 | 3307 | - | - |
| | TBMS-LK5T2MA | 35x12.50R18LT | 128Q | 12 PR | 34.5 | 12.5 | 10.0 | 8.5 - 11.0 | 22 | 72.8 | 80 | 3968 | - | - |
| | TBMS-JFT2MA | LT295/55R20 | 123/120Q | 10 PR | 32.8 | 12.2 | 9.5 | 8.5 - 10.5 | 20 | 64.0 | 80 | 3417 | 3086 | - |
| 20" | TBMS-PEJT2MA | 33x13.50R20LT | 121Q | 12 PR | 32.5 | 13.6 | 11.0 | 9.5 - 12.0 | 22 | 70.3 | 80 | 3197 | - | - |
| | TBMS-PFJT2MA | 35x13.50R20LT | 126Q | 12 PR | 35.0 | 13.6 | 11.0 | 9.5 - 12.0 | 21 | 75.7 | 80 | 3748 | - | - |
| | TBMS-HDLM2MA | 285/45R22 | 114S XL | - | 32.1 | 11.2 | 9.5 | 9.0 - 10.5 | 17 | 44.9 | 50 | 2601 | - | 500 A B |
| 22" | TBMS-HFLT2MA | LT285/55R22 | 124/121Q | 10 PR | 34.4 | 11.7 | 9.0 | 8.5 - 10.0 | 20 | 65.2 | 80 | 3527 | 3197 | - |
| | TBMS-PCLT2MA | 33x13.50R22LT | 114Q | 10 PR | 32.5 | 13.6 | 11.0 | 9.5 - 12.0 | 22 | 68.2 | 65 | 2601 | - | - |
| | TBMS-PELT2MA | 35x13.50R22LT | 123Q | 12 PR | 34.5 | 13.6 | 11.0 | 9.5 - 12.0 | 22 | 75.1 | 80 | 3417 | - | - |
| | TBMS-PBNT2MA | 33x13.50R24LT | 107Q | 10 PR | 32.5 | 13.6 | 11.0 | 9.5 - 12.0 | 22 | 67.4 | 65 | 2150 | - | - |
| 24" | TBMS-PCNT2MA | 35x13.50R24LT | 116Q | 10 PR | 35.0 | 13.6 | 12.0 | 11.5 - 13.5 | 21 | 73.3 | 65 | 2756 | - | - |
| | TBMS-PENT2MA | 37x13.50R24LT | 124Q | 12 PR | 36.5 | 13.6 | 11.0 | 9.5 - 12.0 | 22 | 80.3 | 80 | 3527 | - | - |
| | TBMS-WART2MA | LT385/30R26 | 125Q | 12 PR | 35.1 | 16.5 | 14.0 | 13.5 - 14.5 | 21 | 85.5 | 80 | 3638 | - | - |
| 26" | TBMS-PBRT2MA | 35x13.50R26LT | 123Q | 12 PR | 34.5 | 13.6 | 11.0 | 10.0 - 12.0 | 21 | 74.3 | 80 | 3417 | - | - |
| | TBMS-PCRT2MA | 37x13.50R26LT | 125Q | 12 PR | 36.5 | 13.6 | 11.0 | 9.5 - 12.0 | 21 | 80.6 | 80 | 3638 | - | - |

TRAIL BLADE M/T

See page 4 for more Trail Blade M/T details

| | Atturo Item Number | Size | Load Index/Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|-----|--------------------|-------------------|-------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| | TBMT-BNEM2MA | LT235/85R16 | 120/116Q | 10 PR | 31.7 | 9.3 | 6.5 | 6.0 - 7.5 | 21 | 48.8 | 80 | 3042 | 2778 | - |
| | TBMT-CREM2MA | LT245/75R16 | 120/116Q | 10 PR | 30.5 | 9.8 | 7.0 | 6.5 - 8.0 | 21 | 48.3 | 80 | 3042 | 2778 | - |
| 16" | TBMT-EREM2MA | LT265/75R16 | 123/120Q | 10 PR | 31.9 | 10.4 | 7.5 | 7.0 - 9.0 | 21 | 55.8 | 80 | 3417 | 3086 | - |
| | TBMT-EREM2MB | LT265/75R16 RWL | 123/120Q | 10 PR | 31.7 | 10.5 | 7.5 | 7.0 - 9.0 | 21 | 56.3 | 80 | 3417 | 3086 | - |
| | TBMT-HREM2MA | LT285/75R16 | 126/123Q | 10 PR | 33.1 | 11.3 | 8.0 | 7.5 - 9.5 | 21 | 61.2 | 80 | 3748 | 3417 | - |
| | TBMT-HREM2MB | LT285/75R16 RWL | 126/123Q | 10 PR | 32.8 | 11.3 | 8.0 | 7.5 - 9.5 | 21 | 62.2 | 80 | 3748 | 3417 | - |
| | TBMT-EKFM2MA | LT265/70R17 | 121/118Q | 10 PR | 31.9 | 10.7 | 8.0 | 7.0 - 9.0 | 21 | 56.9 | 80 | 3197 | 2910 | - |
| | TBMT-EKFM2MB | LT265/70R17 RWL | 121/118Q | 10 PR | 31.7 | 10.7 | 8.0 | 7.5 - 8.5 | 21 | 56.9 | 80 | 3197 | 2910 | - |
| 17" | TBMT-LLFM2MA | 33x12.50R17LT | 114Q | 8 PR | 32.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 66.0 | 50 | 2601 | - | - |
| | TBMT-LKFM2MA | 35x12.50R17LT | 121Q | 10 PR | 34.8 | 12.5 | 10.0 | 8.0 - 10.5 | 21 | 70.7 | 65 | 3197 | - | - |
| | TBMT-FL5M2MA | LT275/65R18 | 123/120Q | 10 PR | 32.3 | 11.0 | 8.0 | 8.0 - 9.5 | 21 | 59.2 | 80 | 3417 | 3086 | - |
| | TBMT-FL5M2MB | LT275/65R18 RWL | 123/120Q | 10 PR | 32.1 | 11.0 | 8.0 | 7.5 - 8.5 | 21 | 59.2 | 80 | 3417 | 3086 | - |
| | TBMT-FK5M2MA | LT275/70R18 | 125/122Q | 10 PR | 33.2 | 11.0 | 8.0 | 7.0 - 9.0 | 19 | 60.0 | 80 | 3638 | 3307 | - |
| 18" | TBMT-LH5M2MA | 33x12.50R18LT | 118Q | 10 PR | 32.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 65.5 | 65 | 2910 | - | - |
| | TBMT-LK5M2MA | 35x12.50R18LT | 123Q | 10 PR | 34.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 70.9 | 65 | 3417 | - | - |
| | TBMT-LK5M2MB | 35x12.50R18LT RWL | 123Q | 10 PR | 34.5 | 12.5 | 10.0 | 9.5 - 10.5 | 21 | 70.9 | 65 | 3417 | - | - |
| | TBMT-PK5M2MA | 37x13.50R18LT | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 9.0 - 11.5 | 20 | 79.8 | 65 | 3968 | - | - |
| | TBMT-PK5M2MB | 37x13.50R18LT RWL | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 10.5 - 11.5 | 20 | 79.8 | 65 | 3968 | - | - |
| 19" | TBMT-DFHM2MA | 255/55R19 | 111S XL | - | 30.0 | 10.4 | 8.0 | 7.0 - 9.0 | 16 | 43.1 | 50 | 2403 | - | 540 A B |
| | TBMT-HEJM2MA | LT285/50R20 | 119/116R | 10 PR | 31.5 | 11.7 | 9.0 | 8.5 - 10 | 20 | 57.5 | 80 | 2998 | 2756 | - |
| 20" | TBMT-LEJM2MA | 33x12.50R20LT | 114Q | 10 PR | 32.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 64.9 | 65 | 2601 | - | - |
| | TBMT-LHJM2MA | 35x12.50R20LT | 121Q | 10 PR | 34.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 70.5 | 65 | 3197 | - | - |
| | TBMT-PLJM2MA | 37x13.50R20LT | 127Q | 10 PR | 36.8 | 13.6 | 11.0 | 9.5 - 12.0 | 21 | 82.4 | 65 | 3858 | - | - |
| | TBMT-LDLM2MA | 33x12.50R22LT | 109Q | 10 PR | 32.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 62.8 | 65 | 2271 | - | - |
| 22" | TBMT-LELM2MA | 35x12.50R22LT | 117Q | 10 PR | 34.8 | 12.5 | 10.0 | 8.5 - 11.0 | 21 | 70.2 | 65 | 2833 | - | - |
| | TBMT-PFLM2MA | 37x13.50R22LT | 123Q | 10 PR | 36.8 | 13.6 | 11.0 | 9.5 - 12.0 | 21 | 81.3 | 65 | 3417 | - | - |



SCAN QR CODE FOR DETAILED SIZING
on all tire models or visit www.atturo.com/sizing

TRAIL BLADE X/T

See page 5 for more Trail Blade X/T details

| Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|--------------------|-------------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|---------|
| TBXT-BLFR3PA | 235/65R17 | 108H XL | - | 29.1 | 9.4 | 7.0 | 6.5 - 8.5 | 14 | 34.6 | 50 | 2205 | - | 460 A B |
| TBXT-DRFR3LA | LT255/75R17 | 111/108S | 6 PR | 32.0 | 10.0 | 7.0 | 6.5 - 8.5 | 17 | 48.8 | 50 | 2403 | 2205 | - |
| TBXT-HKFR3LA | LT285/70R17 | 121/118Q | 10 PR | 32.8 | 11.5 | 8.5 | 7.5 - 9.5 | 17 | 57.9 | 80 | 3197 | 2910 | - |
| TBXT-JKFR3LA | LT295/70R17 | 121/118Q | 10 PR | 33.3 | 11.8 | 8.5 | 7.5 - 10.0 | 16 | 58.4 | 80 | 3197 | 2910 | - |
| TBXT-LKFR3LA | 35x12.50R17LT | 121Q | 10 PR | 34.5 | 12.5 | 10.0 | 8.0 - 10.5 | 18 | 70.0 | 65 | 3197 | - | - |
| TBXT-LMFR3LA | 37x12.50R17LT | 124Q | 8 PR | 36.5 | 12.5 | 10.0 | 8.5 - 11.0 | 18 | 70.0 | 50 | 3527 | - | - |
| TBXT-BH5R3PA | 235/60R18 | 107H XL | - | 29.1 | 9.4 | 7.0 | 6.5 - 8.5 | 14 | 33.0 | 50 | 2149 | - | 460 A B |
| TBXT-DK5R3LA | LT255/70R18 | 117/114S | 8 PR | 32.1 | 10.2 | 7.5 | 6.5 - 8.5 | 17 | 50.9 | 65 | 2833 | 2601 | - |
| TBXT-FK5R3LA | LT275/70R18 | 125/122Q | 10 PR | 33.2 | 11.0 | 8.0 | 7.0 - 8.5 | 18 | 61.3 | 80 | 3638 | 3307 | - |
| TBXT-HH5R3PA | 285/60R18 | 120H XL | - | 31.5 | 11.5 | 8.5 | 8.0 - 10.0 | 14 | 44.7 | 50 | 3086 | - | 460 A B |
| TBXT-HL5R3LA | LT285/65R18 | 125/122Q | 10 PR | 32.6 | 11.5 | 8.5 | 8.5 - 10.0 | 17 | 58.6 | 80 | 3638 | 3307 | - |
| TBXT-JK5R3LA | LT295/70R18 | 129/126Q | 10 PR | 34.3 | 11.8 | 8.5 | 7.5 - 10.0 | 18 | 65.5 | 80 | 4079 | 3748 | - |
| TBXT-LH5R3LA | 33x12.50R18LT | 118Q | 10 PR | 32.5 | 12.5 | 10.0 | 8.5 - 11.0 | 18 | 65.1 | 65 | 2910 | - | - |
| TBXT-LK5R3LA | 35x12.50R18LT | 123Q | 10 PR | 34.5 | 12.5 | 10.0 | 8.5 - 11.0 | 18 | 70.1 | 65 | 3417 | - | - |
| TBXT-LK5R3LB | 35x12.50R18LT RWL | 123Q | 10 PR | 34.5 | 12.5 | 10.0 | 9.5 - 10.5 | 18 | 70.1 | 65 | 3417 | - | - |
| TBXT-EEJR3PA | 265/50R20 | 112H XL | - | 30.5 | 10.9 | 8.5 | 7.5 - 9.5 | 14 | 42.5 | 50 | 2469 | - | 460 A B |
| TBXT-EHJR3LA | LT265/60R20 | 121/118S | 10 PR | 32.5 | 10.7 | 8.0 | 8.0 - 9.5 | 17 | 56.5 | 80 | 3197 | 2910 | - |
| TBXT-FDJR3PA | 275/45R20 | 110H XL | - | 29.8 | 10.7 | 9.0 | 8.5 - 10.5 | 14 | 36.8 | 50 | 2337 | - | 460 A B |
| TBXT-FFJR3PA | 275/55R20 | 117S XL | - | 31.9 | 11.2 | 8.5 | 7.5 - 9.5 | 14 | 44.2 | 50 | 2833 | - | 460 A B |
| TBXT-FLJR3LA | LT275/65R20 | 126/123Q | 10 PR | 34.1 | 11.0 | 8.0 | 7.5 - 9.5 | 18 | 62.1 | 80 | 3748 | 3417 | - |
| TBXT-HFJR3LA | LT285/55R20 | 122/119Q | 10 PR | 32.4 | 11.7 | 9.0 | 8.0 - 10.0 | 18 | 60.3 | 80 | 3307 | 2998 | - |
| TBXT-JHJR3LA | LT295/60R20 | 126/123R | 10 PR | 33.9 | 11.8 | 8.5 | 8.5 - 10.5 | 17 | 60.9 | 80 | 3748 | 3417 | - |
| TBXT-KEJR3LA | LT305/50R20 | 121/118Q | 12 PR | 32.0 | 12.4 | 9.5 | 9.0 - 11.0 | 17 | 61.3 | 80 | 3197 | 2910 | - |
| TBXT-KFJR3LA | LT305/55R20 | 121/118Q | 10 PR | 33.2 | 12.4 | 9.5 | 8.5 - 11.0 | 18 | 64.9 | 65 | 3197 | 2910 | - |
| TBXT-LEJR3LA | 33x12.50R20LT | 114Q | 10 PR | 32.5 | 12.5 | 10.0 | 8.5 - 11.0 | 18 | 64.0 | 65 | 2601 | - | - |
| TBXT-LHJR3LA | 35x12.50R20LT | 121Q | 10 PR | 34.5 | 12.5 | 10.0 | 8.5 - 11.0 | 18 | 69.9 | 65 | 3197 | - | - |
| TBXT-FDLR3PA | 275/45R22 | 112H XL | - | 31.8 | 10.7 | 9.0 | 8.5 - 10.5 | 14 | 43.0 | 50 | 2469 | - | 460 A B |
| TBXT-KDLR3PA | 305/45R22 | 118H XL | - | 32.8 | 11.9 | 10.0 | 9.5 - 11.5 | 14 | 48.0 | 50 | 2910 | - | 460 A B |
| TBXT-MELR3LA | LT325/50R22 | 122S | 10 PR | 34.8 | 13.2 | 10.0 | 9.0 - 12.0 | 18 | 69.7 | 65 | 3306 | - | - |
| TBXT-HCNR3PA | 285/40R24 | 112H XL | - | 33.0 | 11.4 | 10.0 | 9.5 - 11.0 | 14 | 46.4 | 50 | 2469 | - | 460 A B |
| TBXT-MDNR3LA | LT325/45R24 | 120S | 10 PR | 35.5 | 12.8 | 11.0 | 9.0 - 12.0 | 14 | 65.5 | 65 | 3086 | - | - |
| TBXT-PENR3LA | LT345/50R24 | 125Q | 10 PR | 37.6 | 14.2 | 11.0 | 10.0 - 12.0 | 18 | 81.6 | 65 | 3637 | - | - |
| TBXT-KARR3PA | 305/30R26 | 109H XL | - | 33.2 | 12.3 | 11.0 | 10.5 - 11.5 | 14 | 47.6 | 50 | 2756 | - | 460 A B |

TRAIL BLADE ATS

See page 6 for more Trail Blade ATS details

| Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|--------------------|-------------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|---------|
| 16" TBAS-BLER4CA | 235/65R16C | 121/119R | 10 PR | 28.0 | 9.4 | 7.0 | 6.5 - 7.5 | 14 | 39.1 | 82 | 3197 | 2998 | - |
| TBAS-AHF8KPA | 225/60R17 | 103H XL | - | 27.6 | 9.0 | 6.5 | 6.0 - 7.0 | 11 | 27.3 | 49 | 1929 | - | 540 A B |
| TBAS-ALF8KPA | 225/65R17 | 106H XL | - | 28.5 | 9.0 | 6.5 | 6.0 - 7.0 | 11 | 28.2 | 49 | 2094 | - | 540 A B |
| 17" TBAS-CLFR4PA | 245/65R17 | 111T XL | - | 29.5 | 9.8 | 7.0 | 7.0 - 8.5 | 15 | 37.5 | 50 | 2403 | - | 540 A B |
| TBAS-CKFR4LA | LT245/70R17 | 119/116S | 10 PR | 30.6 | 9.8 | 7.0 | 6.5 - 8.0 | 17 | 46.5 | 80 | 2998 | 2756 | - |
| TBAS-LKFR4LA | LT315/70R17 | 121/118Q | 10 PR | 34.4 | 12.7 | 9.5 | 8.0 - 9.5 | 16 | 66.1 | 65 | 3197 | 2910 | - |
| TBAS-LLFR4LA | 33x12.50R17LT | 120Q | 10 PR | 32.5 | 12.5 | 10.0 | 8.5 - 11.0 | 17 | 61.7 | 65 | 3086 | - | - |
| TBAS-AH58KPA | 225/60R18 | 104H XL | - | 28.6 | 9.0 | 6.5 | 6.0 - 7.0 | TBA | 31.0 | 49 | 2094 | - | 540 A B |
| TBAS-CH58KPA | 245/60R18 | 109Q XL | - | 29.6 | 9.8 | 7.0 | 7.0 - 8.5 | 15 | 35.8 | 50 | 2271 | - | 540 A B |
| TBAS-EH58KPA | 265/60R18 | 110S | - | 30.5 | 10.7 | 8.0 | 7.5 - 9.5 | 15 | 39.5 | 44 | 2337 | - | 540 A B |
| 18" TBAS-EL58KPA | 265/65R18 | 116T XL | - | 31.5 | 10.7 | 8.0 | 7.5 - 9.5 | 13 | 41.0 | 50 | 2756 | - | 540 A B |
| TBAS-EK58KPA | LT265/70R18 | 124/121S | 10 PR | 32.6 | 10.7 | 8.0 | 7.0 - 9.0 | 17 | 55.4 | 80 | 3527 | 3197 | - |
| TBAS-FL58KPA | LT275/65R18 | 123/120S | 10 PR | 32.1 | 11.0 | 8.0 | 8.0 - 9.5 | 17 | 55.0 | 80 | 3417 | 3086 | - |
| TBAS-PK58KPA | 37x13.50R18LT | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 9.5 - 11.5 | 16 | 73.7 | 65 | 3968 | - | - |
| TBAS-PK58KPB | 37x13.50R18LT RWL | 128Q | 10 PR | 36.5 | 13.6 | 11.0 | 10.5 - 11.5 | 16 | 73.7 | 65 | 3968 | - | - |
| TBAS-CEJBKPA | 245/50R20 | 105H XL | - | 29.7 | 10.0 | 7.5 | 7.0 - 8.0 | TBA | 32.2 | 49 | 2039 | - | 540 A B |
| TBAS-DFJBKPA | 255/55R20 | 110H XL | - | 31.0 | 10.4 | 8.0 | 7.5 - 8.5 | TBA | 34.4 | 49 | 2337 | - | 540 A B |
| TBAS-FHJR4PA | 275/60R20 | 116T XL | - | 33.0 | 11.0 | 8.0 | 7.5 - 9.5 | 13 | 44.9 | 50 | 2756 | - | 540 A B |
| 20" TBAS-HHJR4LB | LT285/60R20 | 125/122Q | 10 PR | 33.5 | 11.5 | 8.5 | 8.5 - 10.0 | 17 | 59.9 | 80 | 3638 | 3307 | - |
| TBAS-LEJR4LA | 33x12.50R20LT | 121Q | 12 PR | 32.5 | 12.5 | 10.0 | 8.5 - 11.0 | 17 | 62.7 | 80 | 3197 | - | - |
| TBAS-LHJR4LA | 35x12.50R20LT | 126Q | 12 PR | 34.5 | 12.5 | 10.0 | 8.5 - 11.0 | 17 | 67.8 | 80 | 3748 | - | - |
| TBAS-LKJR4LA | 37x12.50R20LT | 126Q | 10 PR | 36.5 | 12.5 | 10.0 | 8.5 - 11.0 | 16 | 70.9 | 65 | 3748 | - | - |
| 22" TBAS-FELR4PA | 275/50R22 | 115H XL | - | 32.9 | 11.2 | 8.5 | 7.5 - 9.5 | 14 | 45.7 | 40 | 2679 | - | 540 A B |
| TBAS-HDLR4PA | 285/45R22 | 114H XL | - | 32.1 | 11.2 | 9.5 | 9.0 - 10.5 | 13 | 41.9 | 50 | 2601 | - | 540 A B |
| 24" TBAS-KBNR4PA | 305/35R24 | 112H XL | - | 32.4 | 12.3 | 11.0 | 10.0 - 12.0 | 13 | 44.2 | 50 | 2469 | - | 540 A B |

TRAIL BLADE A/T

See page 7 for more Trail Blade A/T details

| | Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|-----|--------------------|---------------|-----------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| 15" | TBAT-I0041294 | LT235/75R15 | 104/101S | 6 PR | 28.9 | 9.3 | 6.5 | 6.0 - 8.0 | 15 | 36.6 | 50 | 1984 | 1819 | - |
| | TBAT-I0041297 | 30x9.50R15LT | 104S | 6 PR | 29.5 | 9.4 | 7.5 | 6.0 - 8.0 | 15 | 38.8 | 50 | 1984 | - | - |
| | TBAT-I0041295 | 31x10.50R15LT | 109S | 6 PR | 30.5 | 10.6 | 8.5 | 7.0 - 9.0 | 15 | 45.4 | 50 | 2271 | - | - |
| 16" | TBAT-I0041293 | LT215/85R16 | 115/112S | 10 PR | 30.4 | 8.5 | 6.0 | 5.5 - 7.0 | 14 | 39.0 | 80 | 2679 | 2469 | - |
| | TBAT-I0041290 | LT225/75R16 | 115/112S | 10 PR | 29.3 | 8.8 | 6.0 | 6.0 - 7.5 | 14 | 39.0 | 80 | 2679 | 2469 | - |
| | TBAT-I0048346 | 235/70R16 | 106T | - | 29.0 | 9.4 | 7.0 | 6.0 - 8.0 | 13 | 35.3 | 44 | 2094 | - | 540 A B |
| | TBAT-I0041291 | LT235/85R16 | 120/116S | 10 PR | 31.7 | 9.3 | 6.5 | 6.0 - 7.5 | 15 | 44.3 | 80 | 3086 | 2756 | - |
| | TBAT-I0048345 | 245/70R16 | 111T XL | - | 29.5 | 9.8 | 7.0 | 6.5 - 8.0 | 13 | 37.5 | 50 | 2403 | - | 540 A B |
| | TBAT-I0066633 | 245/75R16 | 111T | - | 30.5 | 9.8 | 7.0 | 6.5 - 8.0 | 13 | 37.7 | 44 | 2403 | - | 540 A B |
| | TBAT-I0041289 | LT245/75R16 | 120/116S | 10 PR | 30.5 | 9.8 | 7.0 | 6.5 - 8.0 | 15 | 44.5 | 80 | 3086 | 2756 | - |
| | TBAT-I0048344 | 255/70R16 | 111T | - | 30.1 | 10.2 | 7.5 | 6.5 - 8.5 | 13 | 40.1 | 44 | 3403 | - | 540 A B |
| | TBAT-I0048343 | 265/70R16 | 112T | - | 30.6 | 10.7 | 8.0 | 7.0 - 9.0 | 13 | 42.5 | 44 | 2469 | - | 540 A B |
| | TBAT-I0041288 | LT265/75R16 | 123/120S | 10 PR | 31.7 | 10.5 | 7.5 | 7.0 - 9.0 | 15 | 48.7 | 80 | 3417 | 3086 | - |
| 17" | TBAT-I0048348 | LT235/80R17 | 120/117S | 10 PR | 31.8 | 9.3 | 6.5 | 6.0 - 8.0 | 15 | 46.3 | 80 | 3086 | 2833 | - |
| | TBAT-I0048341 | 245/65R17 | 107T | - | 29.5 | 9.8 | 7.0 | 7.0 - 8.5 | 13 | 37.3 | 44 | 2149 | - | 540 A B |
| | TBAT-I0048347 | LT245/75R17 | 121/118S | 10 PR | 31.5 | 9.8 | 7.0 | 6.5 - 8.0 | 15 | 48.1 | 80 | 3197 | 2910 | - |
| | TBAT-I0048340 | 265/65R17 | 112T | - | 30.6 | 10.7 | 8.0 | 7.5 - 9.5 | 13 | 41.9 | 44 | 2469 | - | 540 A B |
| | TBAT-I0048342 | 265/70R17 | 115T | - | 31.7 | 10.7 | 8.0 | 7.0 - 9.0 | 13 | 48.5 | 44 | 2679 | - | 540 A B |
| | TBAT-I0041287 | LT265/70R17 | 121/118S | 10 PR | 31.7 | 10.7 | 8.0 | 7.0 - 8.5 | 15 | 47.6 | 80 | 3197 | 2910 | - |
| | TBAT-I0066630 | 265/60R18 | 110T | - | 30.5 | 10.7 | 8.0 | 7.5 - 9.5 | 13 | 39.0 | 44 | 2337 | - | 540 A B |
| | TBAT-I0048339 | 265/70R18 | 116T | - | 32.6 | 10.7 | 8.0 | 7.0 - 9.0 | 13 | 46.3 | 44 | 2756 | - | 540 A B |
| | TBAT-I0066634 | 275/65R18 | 116T | - | 32.1 | 11.0 | 8.0 | 7.5 - 9.5 | 13 | 46.7 | 44 | 2756 | - | 540 A B |
| | TBAT-I0066638 | 275/55R20 | 117T XL | - | 31.9 | 11.2 | 8.5 | 7.5 - 9.5 | 13 | 43.4 | 44 | 2833 | - | 540 A B |
| 20" | TBAT-I0048338 | 275/60R20 | 115T | - | 33.0 | 11.0 | 8.0 | 7.5 - 9.5 | 13 | 47.6 | 44 | 2679 | - | 540 A B |
| | TBAT-I0066642 | 285/55R20 | 115T | - | 32.4 | 11.7 | 9.0 | 8.0 - 10.0 | 13 | 44.3 | 44 | 2679 | - | 540 A B |

TRAIL BLADE H/T

See page 8 for more Trail Blade H/T details

| | Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|-----|--------------------|-------------|-----------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| 16" | TBHT-I0125833 | LT215/85R16 | 115/112S | 10 PR | 30.4 | 8.5 | 6.0 | 5.5 - 6.5 | 14.5 | TBA | 80 | 2680 | 2470 | - |
| | TBHT-I0125835 | LT225/75R16 | 115/112S | 10 PR | 29.3 | 8.8 | 6.0 | 5.5 - 6.5 | 14.5 | TBA | 80 | 2680 | 2470 | - |
| | TBHT-I0125793 | 235/65R16C | 121/119S | 10 PR | 28.0 | 9.4 | 7.0 | 6.5 - 7.5 | 12.0 | TBA | 83 | 3195 | 3000 | - |
| 17" | TBHT-I0125837 | LT235/85R16 | 120/116S | 10 PR | 31.7 | 9.3 | 6.5 | 6.0 - 7.0 | 14.5 | TBA | 80 | 3042 | 2778 | - |
| | TBHT-I0125838 | LT245/75R16 | 120/116S | 10 PR | 30.5 | 9.8 | 7.0 | 6.5 - 7.5 | 14.5 | TBA | 80 | 3042 | 2778 | - |
| | TBHT-I0125776 | 265/70R16 | 116H XL | - | 30.6 | 10.7 | 8.0 | 7.5 - 8.5 | 12.0 | TBA | 50 | 2755 | - | 600 A A |
| | TBHT-I0125839 | LT265/75R16 | 123/120S | 10 PR | 31.7 | 10.5 | 7.5 | 7.0 - 8.0 | 14.5 | TBA | 80 | 3415 | 3085 | - |
| | TBHT-I0125791 | 225/60R17 | 99H | - | 27.6 | 9.0 | 6.5 | 6.0 - 7.0 | 12.0 | TBA | 44 | 1710 | - | 600 A A |
| | TBHT-I0125792 | 225/65R17 | 102H | - | 28.5 | 9.0 | 6.5 | 6.0 - 7.0 | 12.0 | TBA | 44 | 1875 | - | 600 A A |
| | TBHT-I0125840 | LT235/80R17 | 120/117S | 10 PR | 31.8 | 9.3 | 6.5 | 6.0 - 7.0 | 14.5 | TBA | 80 | 3085 | 2835 | - |
| | TBHT-I0125843 | LT245/70R17 | 119/116S | 10 PR | 30.6 | 9.8 | 7.0 | 6.5 - 7.5 | 14.5 | TBA | 80 | 3000 | 2755 | - |
| | TBHT-I0125841 | LT245/75R17 | 121/118S | 10 PR | 31.5 | 9.8 | 7.0 | 6.5 - 7.5 | 14.5 | TBA | 80 | 3195 | 2910 | - |
| | TBHT-I0125777 | 255/65R17 | 114T XL | - | 30.1 | 10.2 | 7.5 | 7.0 - 8.0 | 12.0 | TBA | 50 | 2600 | - | 600 A A |
| 18" | TBHT-I0125778 | 265/70R17 | 116T XL | - | 31.7 | 10.7 | 8.0 | 7.5 - 8.5 | 12.0 | TBA | 50 | 2755 | - | 600 A A |
| | TBHT-I0125844 | LT265/70R17 | 123/120S | 10 PR | 31.7 | 10.7 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3415 | 3085 | - |
| | TBHT-I0125780 | 235/65R18 | 110T XL | - | 30.0 | 9.5 | 7.0 | 6.5 - 7.5 | 12.0 | TBA | 50 | 2335 | - | 600 A A |
| | TBHT-I0125781 | 245/60R18 | 109H XL | - | 29.6 | 9.8 | 7.0 | 6.5 - 7.5 | 12.0 | TBA | 50 | 2270 | - | 600 A A |
| | TBHT-I0125783 | 255/65R18 | 115H XL | - | 31.1 | 10.2 | 7.5 | 7.0 - 8.0 | 12.0 | TBA | 50 | 2680 | - | 600 A A |
| | TBHT-I0125784 | 265/65R18 | 116T XL | - | 31.5 | 10.7 | 8.0 | 7.5 - 8.5 | 12.0 | TBA | 50 | 2755 | - | 600 A A |
| | TBHT-I0125845 | LT265/70R18 | 124/121S | 10 PR | 32.6 | 10.7 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3525 | 3195 | - |
| | TBHT-I0125846 | LT275/65R18 | 123/120S | 10 PR | 32.1 | 11.0 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3415 | 3085 | - |
| | TBHT-I0125847 | LT275/70R18 | 125/122S | 10 PR | 33.2 | 11.0 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3640 | 3305 | - |
| | TBHT-I0125785 | 235/55R19 | 105V XL | - | 29.2 | 9.6 | 7.5 | 7.0 - 8.0 | 12.0 | TBA | 50 | 2040 | - | 600 A A |
| 19" | TBHT-I0125786 | 255/60R19 | 113H XL | - | 31.1 | 10.2 | 7.5 | 7.0 - 8.0 | 12.0 | TBA | 50 | 2535 | - | 600 A A |
| | TBHT-I0125848 | LT265/60R20 | 121/118S | 10 PR | 32.5 | 10.7 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3195 | 2910 | - |
| 20" | TBHT-I0125787 | 275/55R20 | 117S XL | - | 31.9 | 11.2 | 8.5 | 8.0 - 9.0 | 12.0 | TBA | 50 | 2835 | - | 600 A A |
| | TBHT-I0125788 | 275/60R20 | 116H XL | - | 33.0 | 11.0 | 8.0 | 7.5 - 8.5 | 12.0 | TBA | 50 | 2755 | - | 600 A A |
| | TBHT-I0125850 | LT275/65R20 | 126/123S | 10 PR | 34.1 | 11.0 | 8.0 | 7.5 - 8.5 | 14.5 | TBA | 80 | 3750 | 3415 | - |
| 22" | TBHT-I0125790 | 285/45R22 | 114H XL | - | 32.1 | 11.2 | 9.5 | 9.0 - 10.0 | 12.0 | TBA | 50 | 2600 | - | 600 A A |
| | TBHT-I0125789 | 275/50R22 | 115H XL | - | 32.9 | 11.2 | 8.5 | 8.0 - 9.0 | 12.0 | TBA | 50 | 2680 | - | 600 A A |

TIRE SPECS

TRAIL BLADE BOSS SXS

NON-DOT (For Off-Road Use Only)

See **page 10** for more
Trail Blade BOSS SXS details

| Atturo Item Number | Size | Load Index /Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) |
|--------------------------|-------------|--------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|
| SXBO-U1LT4ATA | 28x10.00R14 | 70N | 8 PR | 28.2 | 10.2 | 8.0 | 6.0 - 8.5 | 23 | 45.6 |
| SXBO-U1JU4ATA | 29x9.00R14 | 74N | 8 PR | 29.2 | 9.5 | 7.0 | 5.0 - 7.5 | 23 | 46.1 |
| 14" SXBO-U1NU4ATA | 29x11.00R14 | 75N | 8 PR | 29.2 | 11.5 | 9.0 | 6.5 - 9.5 | 23 | 51.8 |
| SXBO-U1LA4ATA | 30x10.00R14 | 74N | 8 PR | 30.2 | 10.5 | 8.0 | 6.0 - 8.5 | 23 | 50.2 |
| SXBO-U1NA4ATA | 30x11.00R14 | 77N | 8 PR | 30.2 | 11.5 | 9.0 | 6.5 - 9.5 | 23 | 53.8 |
| SXBO-U1LA5ATA | 30x10.00R15 | 73N | 8 PR | 30.5 | 10.5 | 8.0 | 6.0 - 8.5 | 23 | 50.7 |
| SXBO-U1NA5ATA | 30x11.00R15 | 75N | 8 PR | 30.5 | 11.2 | 9.0 | 6.5 - 9.5 | 23 | 52.2 |
| 15" SXBO-U1LV5ATA | 32x10.00R15 | 78N | 8 PR | 32.2 | 10.5 | 8.0 | 6.0 - 8.5 | 23 | 53.8 |
| SXBO-U1NV5ATA | 32x11.00R15 | 79N | 8 PR | 32.5 | 11.2 | 9.0 | 6.5 - 9.5 | 23 | 56.2 |
| SXBO-U1LC5ATA | 33x10.00R15 | 80N | 8 PR | 33.0 | 10.5 | 8.0 | 6.0 - 8.5 | 23 | 55.8 |
| SXBO-U1LD5ATA | 35x10.00R15 | 84N | 8 PR | 35.0 | 10.5 | 8.0 | 6.0 - 8.5 | 23 | 59.7 |

TRAIL BLADE X/T SXS

NON-DOT (For Off-Road Use Only)

See **page 11** for more
Trail Blade X/T SXS details

| Atturo Item Number | Size | Load Index /Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) |
|--------------------------|-------------|--------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|
| SXXT-U2LT4ATA | 28x10.00R14 | 70N | 8 PR | 28.2 | 10.2 | 8.0 | 6.0 - 8.5 | 18 | 38.6 |
| SXXT-U2JU4ATA | 29x9.00R14 | 74N | 8 PR | 29.2 | 9.5 | 7.0 | 5.0 - 7.5 | 18 | 39.2 |
| 14" SXXT-U2NU4ATA | 29x11.00R14 | 75N | 8 PR | 29.2 | 11.5 | 9.0 | 6.5 - 9.5 | 18 | 43.4 |
| SXXT-U2LA4ATA | 30x10.00R14 | 74N | 8 PR | 30.2 | 10.5 | 8.0 | 6.0 - 8.5 | 18 | 47.0 |
| SXXT-U2NA4ATA | 30x11.00R14 | 77N | 8 PR | 30.2 | 11.5 | 9.0 | 6.5 - 9.5 | 18 | 45.2 |
| SXXT-U2LA5ATA | 30x10.00R15 | 73N | 8 PR | 30.5 | 10.5 | 8.0 | 6.0 - 8.5 | 18 | 42.8 |
| SXXT-U2NA5ATA | 30x11.00R15 | 75N | 8 PR | 30.5 | 11.2 | 9.0 | 6.5 - 9.5 | 18 | 43.9 |
| 15" SXXT-U2LV5ATA | 32x10.00R15 | 78N | 8 PR | 32.2 | 10.5 | 8.0 | 6.0 - 8.5 | 18 | 45.4 |
| SXXT-U2NV5ATA | 32x11.00R15 | 79N | 8 PR | 32.5 | 11.2 | 9.0 | 6.5 - 9.5 | 18 | 47.2 |
| SXXT-U2LC5ATA | 33x10.00R15 | 80N | 8 PR | 33.0 | 10.5 | 8.0 | 6.0 - 8.5 | 18 | 47.4 |
| SXXT-U2LD5ATA | 35x10.00R15 | 84N | 8 PR | 35.0 | 10.5 | 8.0 | 6.0 - 8.5 | 18 | 50.7 |

AZ850DR

See **page 13** for more
AZ850DR details

| Atturo Item Number | Size | Load Index/Speed Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|---------------------------|-----------|-------------------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| 15" DR850-K040B501 | 275/60R15 | 107W | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2149 | - | 100 A A |
| DR850-K040B709 | 275/40R17 | 102W XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1874 | - | 100 A A |
| 17" DR850-K040B717 | 305/45R17 | 109W | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2271 | - | 100 A A |
| DR850-K040B725 | 315/35R17 | 106Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2094 | - | 100 A A |
| 18" DR850-D3KL8ATA | 315/40R18 | 108Y XL | 27.9 | 12.6 | 11.0 | 10.5 - 12.5 | 5.8 | 34.0 | 50 | 2205 | - | 100 A A |
| DR850-D3HM9ATA | 285/35R19 | 103Y XL | 26.9 | 11.4 | 10.0 | 9.5 - 11.0 | 5.8 | 29.8 | 50 | 1929 | - | 100 A A |
| 19" DR850-D3JN9ATA | 305/30R19 | 102Y XL | 26.3 | 12.3 | 11.0 | 10.5 - 11.5 | 5.8 | 30.4 | 50 | 1874 | - | 100 A A |
| DR850-D3GLOATA | 275/40R20 | 106Y XL | 28.7 | 10.9 | 9.5 | 9.0 - 11.0 | 5.8 | 31.3 | 50 | 2094 | - | 100 A A |
| DR850-D3HNOATA | 285/30R20 | 99Y XL | 26.8 | 11.4 | 10.0 | 9.5 - 10.5 | 5.8 | 28.0 | 50 | 1709 | - | 100 A A |
| DR850-D3HMOATA | 285/35R20 | 104Y XL | 27.9 | 11.4 | 10.0 | 9.5 - 11.0 | 5.8 | 33.3 | 50 | 1984 | - | 100 A A |
| DR850-D3JNOATA | 305/30R20 | 103Y XL | 27.2 | 12.3 | 11.0 | 10.5 - 11.5 | 5.8 | 32.2 | 50 | 1929 | - | 100 A A |
| 20" DR850-D3JMOATA | 305/35R20 | 107Y XL | 27.9 | 12.3 | 11.0 | 10.0 - 12.0 | 5.8 | 34.6 | 50 | 2149 | - | 100 A A |
| DR850-D3KNOATA | 315/30R20 | 104Y XL | 27.5 | 12.6 | 11.0 | 10.5 - 11.5 | 5.8 | 35.9 | 33.3 | 1984 | - | 100 A A |
| DR850-D3KMOATA | 315/35R20 | 110Y XL | 28.7 | 12.6 | 11.0 | 10.5 - 12.5 | 5.8 | 36.6 | 35.9 | 2337 | - | 100 A A |
| DR850-D3PNOATA | 335/30R20 | 108Y XL | 28.0 | 13.5 | 12.0 | 11.5 - 12.5 | 5.8 | 36.2 | 50 | 2205 | - | 100 A A |

AZ850

See **page 14** for more AZ850 details

| Atturo Item Number | Size | Load Index/Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|---------------------------|-----------|-------------------------|------------|-----------------------|--------------------|-----------|--------------------|---------------------|--------------|---------|-----------------------|---------------------|---------|
| AZ850-A7CH8AFE | 235/60R18 | 107Y XL | - | 28.8 | 9.4 | 7.0 | 6.5 - 8.5 | 10 | 30.9 | 50 | 2149 | - | 320 A A |
| 18" AZ850-A7DJ8AFE | 245/50R18 | 104Y XL | - | 27.7 | 9.9 | 7.5 | 7.0 - 8.5 | 10 | 29.8 | 50 | 1984 | - | 320 A A |
| AZ850-A7E18AFE | 255/55R18 | 109Y XL | - | 29.1 | 10.2 | 8.0 | 7.0 - 9.0 | 10 | 32.0 | 50 | 2271 | - | 320 A A |
| AZ850-A7C19AFE | 235/55R19 | 105Y XL | - | 29.2 | 9.6 | 7.5 | 6.5 - 8.5 | 10 | 30.4 | 50 | 2039 | - | 320 A A |
| AZ850-CBHR2PA | 245/35R19 | 93Y XL | - | 25.8 | 9.8 | 8.5 | 8.0 - 9.0 | 10 | 23.0 | 49 | 1433 | - | 320 A A |
| AZ850-A7D19AFE | 245/55R19 | 103V | - | 29.8 | 9.8 | 7.5 | 7.0 - 8.5 | 10 | 32.4 | 44 | 1929 | - | 320 A A |
| AZ850-DCHR2PA | 255/40R19 | 100Y XL | - | 27.0 | 10.2 | 9.0 | 8.5 - 10.0 | 10 | 28.3 | 50 | 1764 | - | 320 A A |
| AZ850-A7E19AFE | 255/50R19 | 107Y XL | - | 29.1 | 10.3 | 8.0 | 7.0 - 9.0 | 10 | 34.2 | 50 | 2149 | - | 320 A A |
| 19" AZ850-A7F19AFE | 265/50R19 | 110Y XL | - | 29.4 | 11.0 | 8.5 | 7.5 - 9.5 | 10 | 34.2 | 50 | 2337 | - | 320 A A |
| AZ850-FCHR2PA | 275/40R19 | 105Y XL | - | 27.7 | 10.9 | 9.5 | 9.0 - 11.0 | 10 | 31.9 | 50 | 2039 | - | 320 A A |
| AZ850-HAHR2PA | 285/30R19 | 98Y XL | - | 25.8 | 11.4 | 10.0 | 9.5 - 10.5 | 10 | 26.3 | 49 | 1653 | - | 320 A A |
| AZ850-HBHR2PA | 285/35R19 | 103Y XL | - | 26.9 | 11.4 | 10.0 | 9.5 - 11.0 | 10 | 32.3 | 50 | 1929 | - | 320 A A |
| AZ850-A7HK9AFE | 285/45R19 | 111Y XL | - | 29.1 | 11.1 | 9.5 | 9.0 - 10.5 | 10 | 34.6 | 50 | 2403 | - | 320 A A |
| AZ850-KAHR2PA | 305/30R19 | 102Y XL | - | 26.3 | 12.3 | 11.0 | 10.5 - 11.5 | 10 | 33.5 | 50 | 1874 | - | 320 A A |

TIRE SPECS

AZ850 CONTINUED

| Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|--------------------|-------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|---------|
| AZ850-BBJR2PA | 235/35R20 | 92Y XL | - | 26.5 | 9.5 | 8.5 | 8.0 - 9.0 | 10 | 23.4 | 49 | 1389 | - | 320 A A |
| AZ850-BCJR2PA | 235/40R20 | 96Y XL | - | 27.4 | 9.5 | 8.5 | 8.0 - 9.0 | 10 | 27.1 | 50 | 1565 | - | 320 A A |
| AZ850-BDJR2PA | 235/45R20 | 100Y XL | - | 28.3 | 9.3 | 8.0 | 7.5 - 9.0 | 10 | 27.3 | 50 | 1764 | - | 320 A A |
| AZ850-CCJR2PA | 245/40R20 | 99Y XL | - | 27.7 | 9.8 | 8.5 | 8.0 - 9.5 | 10 | 28.0 | 50 | 1709 | - | 320 A A |
| AZ850-CDJR2PA | 245/45R20 | 103Y XL | - | 28.7 | 9.6 | 8.0 | 7.5 - 9.0 | 10 | 29.6 | 50 | 1929 | - | 320 A A |
| AZ850-DBJR2PA | 255/35R20 | 97Y XL | - | 27.0 | 10.2 | 9.0 | 8.5 - 10.0 | 10 | 28.6 | 50 | 1609 | - | 320 A A |
| AZ850-DEJR2PA | 255/50R20 | 109Y XL | - | 30.1 | 10.4 | 8.0 | 7.0 - 9.0 | 10 | 35.6 | 50 | 2271 | - | 320 A A |
| AZ850-EBJR2PA | 265/35R20 | 99Y XL | - | 27.3 | 10.7 | 9.5 | 9.0 - 10.5 | 10 | 30.5 | 50 | 1709 | - | 320 A A |
| AZ850-EDJR2PA | 265/45R20 | 108Y XL | - | 29.4 | 10.5 | 9.0 | 8.5 - 10.0 | 10 | 33.2 | 50 | 2205 | - | 320 A A |
| AZ850-FAJR2PA | 275/30R20 | 97Y XL | - | 26.5 | 10.9 | 9.5 | 9.0 - 10.0 | 10 | 27.1 | 49 | 1609 | - | 320 A A |
| AZ850-FBJR2PA | 275/35R20 | 102Y XL | - | 27.6 | 10.9 | 9.5 | 9.0 - 11.0 | 10 | 31.4 | 50 | 1874 | - | 320 A A |
| AZ850-FCJR2PA | 275/40R20 | 106Y XL | - | 28.7 | 10.9 | 9.5 | 9.0 - 11.0 | 10 | 33.4 | 50 | 2094 | - | 320 A A |
| AZ850-FDJR2PA | 275/45R20 | 110Y XL | - | 29.8 | 10.7 | 9.0 | 8.5 - 10.5 | 10 | 33.8 | 50 | 2337 | - | 320 A A |
| AZ850-FEJR2PA | 275/50R20 | 113Y XL | - | 30.9 | 11.2 | 8.5 | 7.5 - 9.5 | 10 | 38.7 | 50 | 2535 | - | 320 A A |
| AZ850-HAJR2PA | 285/30R20 | 99Y XL | - | 26.8 | 11.4 | 10.0 | 9.5 - 10.5 | 10 | 31.1 | 50 | 1709 | - | 320 A A |
| AZ850-HBJR2PA | 285/35R20 | 104Y XL | - | 27.9 | 11.4 | 10.0 | 9.5 - 11.0 | 10 | 33.8 | 50 | 1984 | - | 320 A A |
| AZ850-HCJR2PA | 285/40R20 | 108Y XL | - | 29.0 | 11.4 | 10.0 | 9.5 - 11.0 | 10 | 34.8 | 50 | 2205 | - | 320 A A |
| AZ850-HDJR2PA | 285/45R20 | 112Y XL | - | 30.1 | 11.2 | 9.5 | 9.0 - 10.5 | 10 | 36.2 | 50 | 2469 | - | 320 A A |
| AZ850-JALR2PA | 295/40R20 | 103Y XL | - | 29.0 | 11.9 | 10.5 | 10.0 - 11.0 | 10 | 35.1 | 50 | 1929 | - | 320 A A |
| AZ850-JDJR2PA | 295/45R20 | 114Y XL | - | 30.5 | 11.7 | 10.0 | 9.5 - 11.0 | 10 | 37.5 | 50 | 2601 | - | 320 A A |
| AZ850-KAJR2PA | 305/30R20 | 103Y XL | - | 27.2 | 12.3 | 11.0 | 10.5 - 11.5 | 10 | 35.0 | 50 | 1929 | - | 320 A A |
| AZ850-KBJR2PA | 305/35R20 | 107Y XL | - | 28.4 | 12.3 | 11.0 | 10.0 - 12.0 | 10 | 36.2 | 50 | 2149 | - | 320 A A |
| AZ850-KEJR2LB | LT305/50R20 | 123/121H | 12 PR | 32.0 | 12.4 | 9.5 | 8.5 - 11.0 | 10 | 53.7 | 80 | 3417 | 3197 | - |
| AZ850-LAJR2PA | 315/30R20 | 104Y XL | - | 27.5 | 12.6 | 11.0 | 10.5 - 11.5 | 10 | 35.8 | 50 | 1984 | - | 320 A A |
| AZ850-LBJR2PA | 315/35R20 | 110Y XL | - | 28.7 | 12.6 | 11.0 | 10.5 - 12.5 | 10 | 36.6 | 50 | 2337 | - | 320 A A |
| AZ850-DBKR2PA | 255/35R21 | 98Y XL | - | 28.0 | 10.2 | 9.0 | 8.5 - 9.5 | 10 | 27.8 | 49 | 1653 | - | 320 A A |
| AZ850-A7ELAAFE | 255/40R21 | 102Y XL | - | 29.0 | 10.2 | 9.0 | 8.5 - 10.0 | 10 | 32.0 | 50 | 1874 | - | 320 A A |
| AZ850-A7FLAAFE | 265/40R21 | 105Y XL | - | 29.4 | 10.3 | 9.5 | 9.0 - 10.5 | 10 | 34.0 | 50 | 2039 | - | 320 A A |
| AZ850-FBKR2PA | 275/35R21 | 103Y XL | - | 28.5 | 10.9 | 9.5 | 9.0 - 10.0 | 10 | 32.6 | 49 | 1929 | - | 320 A A |
| AZ850-A7GKAAFE | 275/45R21 | 110Y XL | - | 30.8 | 10.6 | 9.0 | 8.5 - 10.5 | 10 | 34.4 | 50 | 2337 | - | 320 A A |
| AZ850-A7HLAAFE | 285/40R21 | 109Y XL | - | 30.1 | 11.1 | 10.0 | 9.5 - 11.0 | 10 | 37.0 | 50 | 2271 | - | 320 A A |
| AZ850-JBKR2PA | 295/35R21 | 107Y XL | - | 29.1 | 11.9 | 10.5 | 10.0 - 11.5 | 10 | 36.1 | 50 | 2149 | - | 320 A A |
| AZ850-JCKR2PA | 295/40R21 | 111Y XL | - | 30.3 | 11.9 | 10.5 | 10.0 - 11.5 | 10 | 38.4 | 50 | 2403 | - | 320 A A |

AZ850 CONTINUED

| Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) | UTQG |
|--------------------|-------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|---------|
| AZ850-A7GMBAFE | 275/35R22 | 104Y XL | - | 29.6 | 10.9 | 9.5 | 9.0 - 11.0 | 10 | 35.7 | 50 | 1984 | - | 320 A A |
| AZ850-A7GLBAFE | 275/40R22 | 108Y XL | - | 30.7 | 10.8 | 9.5 | 9.0 - 11.0 | 10 | 35.3 | 50 | 2205 | - | 320 A A |
| AZ850-A7HNBABFE | 285/30R22 | 101Y XL | - | 28.8 | 11.4 | 10.0 | 9.5 - 10.5 | 10 | 34.4 | 50 | 1819 | - | 320 A A |
| AZ850-A7HMBABFE | 285/35R22 | 106Y XL | - | 30.0 | 11.3 | 10.0 | 9.5 - 11.0 | 10 | 35.5 | 50 | 2094 | - | 320 A A |
| AZ850-A7HLBATE | 285/40R22 | 110Y XL | - | 31.0 | 11.4 | 10.0 | 9.5 - 11.0 | 10 | 39.0 | 50 | 2337 | - | 320 A A |
| AZ850-D8HJBATA | LT285/50R22 | 125/122H | 12 PR | 33.3 | 11.7 | 9.0 | 8.5 - 9.5 | 10 | 52.9 | 95 | 3638 | 3307 | - |
| AZ850-A7INBAFE | 295/30R22 | 103Y XL | - | 29.1 | 11.8 | 10.5 | 10.0 - 11.0 | 10 | 36.4 | 50 | 1929 | - | 320 A A |
| AZ850-A7JMBABFE | 305/35R22 | 110Y XL | - | 30.6 | 12.2 | 11.0 | 10.0 - 12.0 | 10 | 38.4 | 50 | 2337 | - | 320 A A |
| AZ850-A7KNBAFE | 315/30R22 | 107Y XL | - | 29.7 | 12.3 | 11.0 | 10.5 - 11.5 | 10 | 37.9 | 50 | 2149 | - | 320 A A |
| AZ850-A7PPBAFE | 335/25R22 | 105Y XL | - | 28.8 | 13.2 | 12.0 | 11.5 - 12.5 | 10 | 40.8 | 50 | 2039 | - | 320 A A |

AZ810

See page 15 for more AZ810 details

| Atturo Item Number | Size | Load Index/ Speed Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | UTQG |
|--------------------|-----------|-----------------------------|-----------------------------|--------------------------|--------------|-----------------------|------------------------|-----------------|------------|-----------------------------|---------|
| AZ810-8FEAJPA | 205/55R16 | 94W XL | 24.9 | 8.4 | 6.5 | 6.0 - 7.0 | 9 | 19.4 | 49 | 1477 | 420 A A |
| AZ810-9HEAJPA | 215/60R16 | 99V XL | 26.1 | 8.7 | 6.5 | 6.5 - 7.0 | 9 | 21.6 | 44 | 1521 | 420 A A |
| AZ810-9HFAJPA | 215/60R17 | 100V XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1764 | 420 A A |
| AZ810-ADFAJPA | 225/45R17 | 94Y XL | 25.0 | 8.9 | 7.5 | 7.0 - 8.0 | 9 | 21.3 | 49 | 1477 | 420 A A |
| AZ810-AEFAJPA | 225/50R17 | 98W XL | 25.9 | 9.2 | 7.0 | 6.5 - 7.5 | 9 | 22.8 | 49 | 1653 | 420 A A |
| AZ810-BDFAJPA | 235/45R17 | 97Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1609 | 420 A A |
| AZ810-AC5AJPA | 225/40R18 | 92Y XL | 25.1 | 9.1 | 8.0 | 7.5 - 8.5 | 9 | 21.3 | 49 | 1389 | 420 A A |
| TBA | 225/45R18 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 420 A A |
| AZ810-BC5AJPA | 235/40R18 | 95Y XL | 25.4 | 9.5 | 8.5 | 8.0 - 9.0 | 9 | 22.3 | 49 | 1521 | 420 A A |
| AZ810-BD5AJPA | 235/45R18 | 98Y XL | 26.3 | 9.3 | 8.0 | 7.5 - 8.5 | 9 | 23.5 | 49 | 1653 | 420 A A |
| AZ810-BE5AJPA | 235/50R18 | 101W XL | 27.3 | 9.6 | 7.5 | 7.0 - 8.0 | 9 | 26.4 | 49 | 1819 | 420 A A |
| AZ810-DD5AJPA | 255/45R18 | 103Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1929 | 420 A A |
| AZ810-ACHAJPA | 225/40R19 | 93Y XL | TBA | TBA | TBA | TBA | 9 | TBA | TBA | 1433 | 420 A A |
| AZ810-ADHAJPA | 225/45R19 | 96Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1565 | 420 A A |
| AZ810-BBHAJPA | 235/35R19 | 91Y XL | 25.5 | 9.5 | 8.5 | 8.0 - 9.0 | 9 | 22.7 | 49 | 1356 | 420 A A |
| AZ810-BCHAJPA | 235/40R19 | 96Y XL | 26.4 | 9.5 | 8.5 | 8.0 - 9.0 | 9 | 23.4 | 49 | 1565 | 420 A A |
| AZ810-BDHAJPA | 235/45R19 | 99W XL | TBA | TBA | TBA | TBA | 9 | TBA | TBA | 1709 | 420 A A |
| AZ810-CCHAJPA | 245/40R19 | 98Y XL | TBA | TBA | TBA | TBA | 9 | TBA | TBA | 1653 | 420 A A |
| AZ810-DEHAJPA | 255/50R19 | 107W XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2149 | 420 A A |
| AZ810-DFHAJPA | 255/55R19 | 111W XL | 30.0 | 10.4 | 8.0 | 7.5 - 8.5 | 10 | 31.7 | 49 | 2403 | 420 A A |

THE SPECS

AZ810 CONTINUED

| Atturo Item Number | Size | Load Index/ Speed Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | UTQG |
|--------------------------|-----------|-----------------------------|--------------------------|-----------------------|--------------|-----------------------|------------------------|-----------------|------------|--------------------------|---------|
| TBA | 235/35R20 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 420 A A |
| AZ810-BEJAIPA | 235/50R20 | 104W XL | 29.3 | 9.6 | 7.5 | 7.0 - 8.0 | 10 | 28.8 | 49 | 1984 | 420 A A |
| AZ810-BFJAIPA | 235/55R20 | 105V XL | 30.2 | 9.6 | 7.5 | 7.0 - 8.0 | 9 | 30.2 | 49 | 2039 | 420 A A |
| AZ810-CBJAIPA | 245/35R20 | 95Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1521 | 420 A A |
| AZ810-CDJAIPA | 245/45R20 | 103W XL | 28.7 | 9.6 | 8.0 | 7.5 - 8.5 | 9 | 27.5 | 49 | 1929 | 420 A A |
| AZ810-DCJAIPA | 255/40R20 | 101Y XL | 28.0 | 10.2 | 9.0 | 8.5 - 9.5 | 9 | 28.2 | 49 | 1819 | 420 A A |
| 20" AZ810-DDJAIPA | 255/45R20 | 105W XL | 29.1 | 10.0 | 8.5 | 8.0 - 9.0 | 9 | 29.8 | 49 | 2039 | 420 A A |
| AZ810-FCJAIPA | 275/40R20 | 106W XL | 28.7 | 10.9 | 9.5 | 9.0 - 10.0 | 10 | 30.2 | 49 | 2094 | 420 A A |
| AZ810-FDJAIPA | 275/45R20 | 110Y XL | 29.8 | 10.7 | 9.5 | 8.5 - 9.0 | 10 | 33.1 | 49 | 2337 | 420 A A |
| AZ810-FEJAIPA | 275/50R20 | 113Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2535 | 420 A A |
| AZ810-JDJAIPA | 295/45R20 | 114Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2601 | 420 A A |
| AZ810-KBJAIPA | 305/35R20 | 107Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2149 | 420 A A |
| TBA | 305/40R20 | 112Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2469 | 420 A A |
| AZ810-BDKAIPA | 235/45R21 | 101Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 1819 | 420 A A |
| AZ810-CBKAIPA | 245/35R21 | 96Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 1565 | 420 A A |
| AZ810-DBKAIPA | 255/35R21 | 98Y XL | 28.0 | 10.2 | 9 | 8.5 - 9.5 | 10 | 27.6 | 49 | 1653 | 420 A A |
| AZ810-DCKAIPA | 255/40R21 | 102Y XL | 29.0 | 10.2 | 9 | 8.5 - 9.5 | 10 | 30.0 | 49 | 1874 | 420 A A |
| AZ810-ECKAIPA | 265/40R21 | 105Y XL | 29.3 | 10.7 | 9.5 | 9.0 - 10.0 | 10 | 32.0 | 49 | 2039 | 420 A A |
| 21" AZ810-EDKAIPA | 265/45R21 | 108Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2205 | 420 A A |
| AZ810-FBKAIPA | 275/35R21 | 103Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1929 | 420 A A |
| AZ810-FDKAIPA | 275/45R21 | 110Y XL | 30.7 | 10.7 | 9 | 8.5 - 9.5 | 10 | 34.8 | 49 | 2337 | 420 A A |
| AZ810-HCKAIPA | 285/40R21 | 109Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2271 | 420 A A |
| AZ810-JBKAIPA | 295/35R21 | 107Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2149 | 420 A A |
| AZ810-JCKAIPA | 295/40R21 | 111Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2403 | 420 A A |
| AZ810-EBLAIPA | 265/35R22 | 102Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 1874 | 420 A A |
| AZ810-ECLAIPA | 265/40R22 | 106W XL | 30.4 | 10.7 | 9.5 | 9.0 - 10.0 | 10 | 33.3 | 49 | 2094 | 420 A A |
| AZ810-FCLAIPA | 275/40R22 | 108Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2205 | 420 A A |
| 22" AZ810-FDLAIPA | 275/45R22 | 112W XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2469 | 420 A A |
| AZ810-HBLAIPA | 285/35R22 | 106Y XL | TBA | TBA | TBA | TBA | TBA | TBA | TBA | 2094 | 420 A A |
| AZ810-HCLAIPA | 285/40R22 | 110Y XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2337 | 420 A A |
| AZ810-KCLAIPA | 305/40R22 | 114V XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2601 | 420 A A |
| AZ810-KDLAIPA | 305/45R22 | 118V XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2910 | 420 A A |
| AZ810-HCNAIPA | 285/40R24 | 112V XL | 33.0 | 11.4 | 10.0 | 9.5 - 10.5 | 10 | 38.4 | 49 | 2469 | 420 A A |
| 24" AZ810-JBNAIPA | 295/35R24 | 110V XL | TBA | TBA | TBA | TBA | 10 | TBA | TBA | 2337 | 420 A A |
| AZ810-JCNAIPA | 295/40R24 | 114V XL | 33.3 | 11.9 | 10.5 | 10.0 - 11.0 | 10 | 41.3 | 49 | 2601 | 420 A A |
| AZ810-KBNAIPA | 305/35R24 | 112V XL | 32.4 | 12.3 | 11.0 | 10.5 - 11.5 | 10 | 40.7 | 49 | 2469 | 420 A A |
| 26" AZ810-JARAIPA | 295/30R26 | 107V XL | 33.0 | 11.9 | 10.5 | 10.0 - 11.0 | 10 | 39.2 | 51 | 2149 | 420 A A |
| AZ810-KARAIPA | 305/30R26 | 109V XL | 33.2 | 12.3 | 11 | 10.5 - 11.5 | 10 | 40.3 | 51 | 2271 | 420 A A |

AZ610

See page 16 for more AZ610 details

| Atturo Item Number | Size | Load Index/ Speed Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | UTQG |
|---------------------------|-----------|-----------------------------|--------------------------|-----------------------|--------------|-----------------------|------------------------|-----------------|------------|--------------------------|---------|
| AZ610-10064532 | 205/70R15 | 96H | 26.3 | 8.2 | 6.0 | 5.0 - 7.0 | 10 | 25.8 | 44 | 1565 | 560 A A |
| 15" AZ610-10064522 | 215/70R15 | 98H | 26.9 | 8.7 | 6.5 | 5.5 - 7.0 | 10 | 28.2 | 44 | 1653 | 560 A A |
| AZ610-10064528 | 225/70R15 | 100H | 27.4 | 9.0 | 6.5 | 6.0 - 7.5 | 10 | 30.4 | 44 | 1764 | 560 A A |
| AZ610-10064519 | 215/70R16 | 100H | 27.9 | 8.7 | 6.5 | 5.5 - 7.0 | 10 | 29.5 | 44 | 1764 | 560 A A |
| AZ610-10064520 | 225/70R16 | 103H | 28.4 | 9.0 | 6.5 | 6.0 - 7.5 | 10 | 30.9 | 44 | 1929 | 560 A A |
| 16" AZ610-10064510 | 235/70R16 | 106H | 29.0 | 9.4 | 7.0 | 6.0 - 8.0 | 10 | 31.5 | 44 | 2094 | 560 A A |
| AZ610-10064512 | 245/70R16 | 111H XL | 29.5 | 9.8 | 7.0 | 6.5 - 8.0 | 10 | 35.1 | 50 | 2403 | 560 A A |
| AZ610-10064511 | 265/70R16 | 112H | 30.6 | 10.7 | 8.0 | 7.0 - 9.0 | 10 | 39.0 | 44 | 2469 | 560 A A |
| AZ610-10064534 | 265/75R16 | 116T | 31.7 | 10.5 | 7.5 | 7.0 - 9.0 | 10 | 41.0 | 44 | 2756 | 560 A A |
| AZ610-10064513 | 225/65R17 | 102H | 28.5 | 9.0 | 6.5 | 6.0 - 8.0 | 10 | 29.3 | 44 | 1874 | 560 A A |
| AZ610-10064516 | 235/65R17 | 108H XL | 29.1 | 9.4 | 7.0 | 6.5 - 8.5 | 10 | 31.7 | 50 | 2205 | 560 A A |
| AZ610-10064527 | 235/70R17 | 111H XL | 30.0 | 9.4 | 7.0 | 6.0 - 8.0 | 10 | 34.2 | 50 | 2403 | 560 A A |
| 17" AZ610-10064515 | 245/65R17 | 111H XL | 29.5 | 9.8 | 7.0 | 7.0 - 8.5 | 10 | 34.0 | 50 | 2403 | 560 A A |
| AZ610-10064517 | 245/70R17 | 110H | 30.6 | 9.8 | 7.0 | 6.5 - 8.0 | 10 | 36.2 | 44 | 2337 | 560 A A |
| AZ610-10064526 | 265/65R17 | 112H | 30.6 | 10.7 | 8.0 | 7.5 - 9.5 | 10 | 39.0 | 44 | 2469 | 560 A A |
| AZ610-10064535 | 265/70R17 | 115H | 31.7 | 10.7 | 8.0 | 7.0 - 9.0 | 10 | 39.7 | 44 | 2679 | 560 A A |
| AZ610-10064521 | 235/55R18 | 104V XL | 28.1 | 9.6 | 7.5 | 6.5 - 8.5 | 10 | 31.1 | 50 | 1984 | 560 A A |
| 18" AZ610-10064524 | 255/55R18 | 109V XL | 29.0 | 10.4 | 8.0 | 7.0 - 9.0 | 10 | 35.7 | 50 | 2271 | 560 A A |
| AZ610-10064523 | 265/60R18 | 110H | 30.5 | 10.7 | 8.0 | 7.5 - 9.5 | 10 | 38.6 | 44 | 2337 | 560 A A |
| AZ610-10064530 | 265/50R20 | 112V XL | 30.5 | 10.9 | 8.5 | 7.5 - 9.5 | 10 | 39.9 | 50 | 2469 | 560 A A |
| 20" AZ610-10064525 | 275/55R20 | 117V XL | 31.9 | 11.2 | 8.5 | 7.5 - 9.5 | 10 | 41.9 | 50 | 2833 | 560 A A |
| AZ610-10064533 | 285/50R20 | 112V | 31.3 | 11.7 | 9.0 | 8.0 - 10.0 | 10 | 41.7 | 44 | 2469 | 560 A A |



**SCAN QR CODE FOR
DETAILED SIZING**
on all tire models or visit
www.atturo.com/sizing

AZ600

See page 17 for more AZ600 details

| | Atturo Item Number | Size | Load Index/ Speed Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | UTQG |
|-----|--------------------|-----------|-----------------------------|--------------------------|-----------------------|-----------|-----------------------|------------------------|--------------|---------|--------------------------|---------|
| 16" | AZ600-10117302 | 215/65R16 | 102H XL | 27.0 | 8.7 | 6.5 | 6.0 - 7.0 | 10 | 26.1 | 50 | 1875 | 560 A A |
| | AZ600-10048353 | 225/55R17 | 101H XL | 26.8 | 9.2 | 7.0 | 6.0 - 8.0 | 10 | 28.0 | 50 | 1819 | 560 A A |
| 17" | AZ600-10117303 | 225/60R17 | 99H | 27.6 | 9.0 | 6.5 | 6.0 - 7.0 | 10 | 28.9 | 44 | 1710 | 560 A A |
| | AZ600-10117304 | 235/60R17 | 102H | 28.1 | 9.4 | 7.0 | 6.5 - 7.5 | 10 | 31.1 | 44 | 1875 | 560 A A |
| 18" | AZ600-10117307 | 225/55R18 | 98V | 27.8 | 9.2 | 7.0 | 6.5 - 7.5 | 10 | 30.0 | 44 | 1655 | 560 A A |
| | AZ600-10117308 | 225/60R18 | 100H | 28.6 | 9.0 | 6.5 | 6.0 - 7.0 | 10 | 30.2 | 44 | 1765 | 560 A A |
| | AZ600-10117309 | 235/60R18 | 107V XL | 29.1 | 9.4 | 7.0 | 6.5 - 7.5 | 10 | 31.2 | 50 | 2150 | 560 A A |
| | AZ600-10125339 | 235/65R18 | 110H XL | 30 | 9.5 | 7.0 | 6.5 - 7.5 | 10 | 31.5 | 50 | 2335 | 560 A A |
| | AZ600-10117310 | 245/60R18 | 105V | 29.6 | 9.8 | 7.0 | 6.5 - 7.5 | 10 | 33.8 | 44 | 2040 | 560 A A |
| | AZ600-10117312 | 255/65R18 | 111H | 31.1 | 10.2 | 7.5 | 7.0 - 8.0 | 10 | 37.8 | 44 | 2405 | 560 A A |
| 19" | AZ600-10117316 | 275/65R18 | 116H | 32.1 | 11.0 | 8.0 | 7.5 - 8.5 | 10 | 41.6 | 44 | 2755 | 560 A A |
| | AZ600-10125340 | 225/55R19 | 99V | 28.7 | 9.1 | 7.0 | 6.5 - 7.5 | 10 | 31.6 | 44 | 1710 | 560 A A |
| | AZ600-10125411 | 235/45R19 | 99H XL | 27.3 | 9.2 | 8.0 | 7.5 - 8.5 | 10 | 28.9 | 44 | 1710 | 560 A A |
| | AZ600-10125343 | 235/50R19 | 99V | 28.3 | 9.6 | 7.5 | 7.0 - 8.0 | 10 | 29.8 | 44 | 1710 | 560 A A |
| | AZ600-10125341 | 235/55R19 | 105V XL | 29.1 | 9.6 | 7.5 | 7.0 - 8.0 | 10 | 31.5 | 50 | 2040 | 560 A A |
| | AZ600-10125342 | 245/55R19 | 107H XL | 29.6 | 9.9 | 7.5 | 7.0 - 8.0 | 10 | 32.7 | 50 | 2150 | 560 A A |
| 20" | AZ600-10125412 | 235/55R20 | 105V XL | 30.1 | 9.6 | 7.5 | 7.0 - 8.0 | 10 | 32.8 | 50 | 2040 | 560 A A |
| | AZ600-10125414 | 245/50R20 | 105V XL | 29.6 | 9.9 | 7.5 | 7.0 - 8.0 | 10 | 33.1 | 50 | 2040 | 560 A A |
| 22" | AZ600-10125415 | 255/50R20 | 109H XL | 30.0 | 10.4 | 8.0 | 7.5 - 8.5 | 10 | 34.5 | 50 | 2270 | 560 A A |
| | AZ600-10125413 | 255/55R20 | 110H XL | 31.0 | 10.4 | 8.0 | 7.5 - 8.5 | 10 | 36.3 | 50 | 2335 | 560 A A |
| 22" | AZ600-10117317 | 275/60R20 | 115H | 33.0 | 11.0 | 8.0 | 7.5 - 8.5 | 10 | 44.4 | 44 | 2680 | 560 A A |
| | AZ600-10125416 | 275/50R22 | 115H XL | 32.8 | 11.1 | 8.5 | 7.5 - 8.5 | 10 | 42.4 | 50 | 2680 | 560 A A |
| | AZ600-10125417 | 285/45R22 | 114H XL | 32.0 | 11.2 | 9.5 | 7.5 - 8.5 | 10 | 41.0 | 50 | 2600 | 560 A A |

CV400

See page 19 for more CV400 details

| | Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) |
|-----|--------------------|------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|
| 16" | CV400-10066653 | 205/65R16C | 107/105R | 8 PR | 26.5 | 8.2 | 6.0 | 5.5 - 6.5 | 11 | 27.6 | 69 | 2149 | 2039 |
| | CV400-10066649 | 205/75R16C | 110/108R | 8 PR | 28.1 | 8.0 | 5.5 | 5.5 - 6.5 | 11 | 31.2 | 69 | 2337 | 2205 |
| | CV400-10066647 | 215/65R16C | 109/107R | 8 PR | 27.0 | 8.7 | 6.5 | 6.0 - 7.0 | 11 | 29.7 | 69 | 2271 | 2149 |
| | CV400-10066650 | 215/75R16C | 113/111R | 8 PR | 28.7 | 8.5 | 6.0 | 5.5 - 7.0 | 11 | 33.0 | 69 | 2535 | 2403 |
| | CV400-10066652 | 225/75R16C | 121/120R | 10 PR | 29.3 | 8.8 | 6.0 | 6.0 - 7.0 | 11 | 35.0 | 83 | 3197 | 3086 |
| | CV400-10066645 | 235/65R16C | 121/119R | 10 PR | 28.0 | 9.4 | 7.0 | 6.5 - 7.5 | 11 | 34.7 | 83 | 3197 | 2998 |


ST300

See page 20 for more ST300 details

| | Atturo Item Number | Size | Load Index/ Speed Rating | Ply Rating | Overall Diameter (in) | Section Width (in) | Meas. Rim | Approved Rim Width | Tread Depth (32nds) | Weight (lbs) | Max PSI | Max Load Single (lbs) | Max Load Dual (lbs) |
|-------|--------------------|-------------|-----------------------------|---------------|-----------------------------|--------------------------|--------------|-----------------------|---------------------------|-----------------|------------|-----------------------------|---------------------------|
| 12" | TBA | ST145R12 | 95/90M | 10PR | 21.3 | 5.8 | 4.0 | 4.0 | 9 | TBA | 50 | 1520 | 1320 |
| 13" | ST300-10127291 | ST175/80R13 | 91/87M | 6PR | 24.0 | 7.0 | 5.0 | 4.5 - 5.5 | 9 | 16.9 | 50 | 1360 | 1200 |
| | TBA | ST185/80R13 | 99/95M | 8PR | 24.6 | 7.2 | 6.0 | 4.0 - 6.0 | 9 | TBA | 50 | 1709 | 1609 |
| 14" | ST300-10122899 | ST205/75R14 | 105/101M | 8PR | 26.1 | 8.0 | 5.5 | 5.0 - 6.5 | 9 | 22.4 | 65 | 2040 | 1820 |
| | ST300-10122900 | ST215/75R14 | 108/103M | 8PR | 26.7 | 8.5 | 6.0 | 5.5 - 6.5 | 9 | 25.5 | 65 | 2200 | 1930 |
| 15" | TBA | ST205/75R15 | TBA | 6PR | 27.1 | 8.0 | 6.0 | 5.0 - 6.5 | 9 | TBA | 80 | 1820 | 1610 |
| | ST300-10122901 | ST205/75R15 | 107/102M | 8PR | 27.1 | 8.0 | 5.5 | 5.0 - 6.5 | 9 | 23.9 | 65 | 2150 | 1870 |
| | ST300-10122902 | ST225/75R15 | 117/112M | 10PR | 28.3 | 8.8 | 6.0 | 5.5 - 6.5 | 9 | 29.7 | 80 | 2830 | 2470 |
| 16" | ST300-10122903 | ST225/75R15 | 121/117M | 12PR | 28.3 | 8.8 | 6.0 | 5.5 - 6.5 | 9 | 32.3 | 95 | 3195 | 2835 |
| | ST300-10122904 | ST235/80R16 | 124/120M | 10PR | 30.8 | 9.3 | 6.5 | 6.0 - 7.5 | 10 | 35.9 | 80.0 | 3420 | 3000 |
| | TBA | ST235/80R16 | 129/125M | 14PR | 30.8 | 9.3 | 6.5 | TBA | 10 | 58.4 | 110 | 4080 | 3640 |
| 16" | TBA | ST235/85R16 | 132/127M | 14PR | 31.8 | 9.3 | 6.5 | TBA | 10 | 59.2 | 110 | 4400 | 3860 |
| | TBA | ST235/85R16 | 128/124M | 12PR | 31.8 | 9.3 | 6.5 | TBA | TBA | TBA | TBA | TBA | TBA |
| 17.5" | TBA | 215/75R17.5 | 136/133L | 16PR | TBA | TBA | 6.0 | TBA | 12 | 54.9 | 122 | 4805 | 4540 |
| | TBA | 235/75R17.5 | 143/141L | 16PR | TBA | TBA | 6.75 | TBA | 12 | 59.6 | 127 | 6005 | 5675 |

● ALL STEEL

ATTURO TIRES

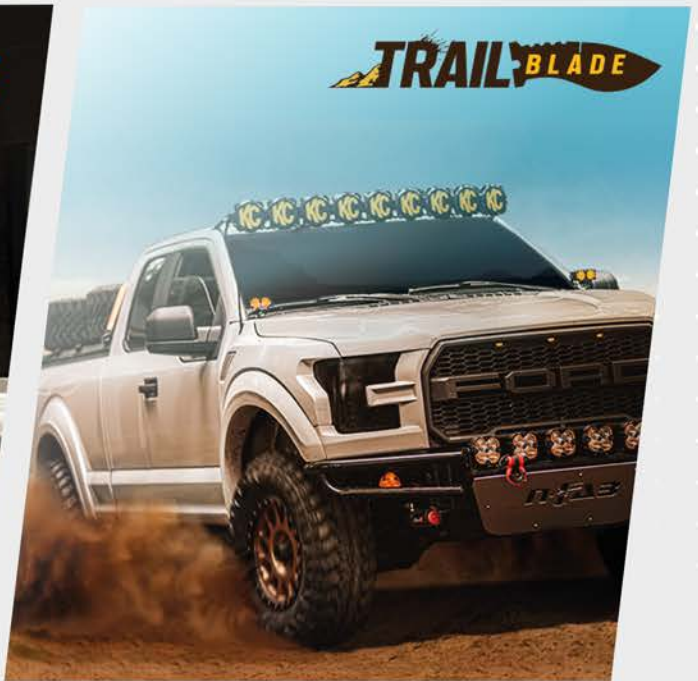

@AtturoTires