

Autel Introduces The Most Affordable Service Tool

MD808 PRO - PROFESSIONAL SCAN TOOL



**AUTO VIN
DETECTION**



FULL SYSTEM

100%	Auto Scan	
1	ABS--Anti-Lock Brake / Traction Control Module	Fault 3
2	ACCM#2- -Air Conditioning Control Module	Pass No Fault
3	APIM- -Accessory Protocol Interface Module	Pass No Fault
4	BCM#1- -Body Control Module	Pass No Fault
5	ACM- -Audio Control Module	Pass No Fault
Quick Erase Save Display DTC		

FULL SYSTEMS DIAGNOSTICS

- Read / Test / Clear trouble codes all modules
- POWERTRAIN SYSTEM**
- BODY SYSTEM**
- CHASSIS SYSTEM**
- INFO & COMMUNICATION**
- Auto VIN Detection
- Auto Scan all major systems
- Live Data to test individual systems
- Communicate with door modules, body controllers, electronic modules
- Support all OBDII protocols and 10 test modes including Freeze Frame, Enhanced Mode 6, Vehicle Info, I/M Readiness, On-Board Monitor and Component Tests
- Graph, record and playback freeze frame data



QUICK SERVICE

Service	
Oil Reset	EPB
SAS	DPF
BMS	

ADVANCED SERVICE FEATURES

- Read and clear trouble codes, control and test BMS / EPB / SAS / Oil Light Reset / DPF systems
- Diesel particulate / including forced regeneration
- Reset steering angle sensor (SAS) functionality
- Reset oil service and battery registration
- Resets Battery Monitoring System
- Reset service mileage and service intervals
- Perform OLS / oil service resets
- Set inspection 1 & 2 service intervals
- Opens and closes EPB (electronic brake calipers) for pad removal and service
- Read and clear EPB/SBC trouble codes
- Diagnose EPB/SBC (Sensotronic Brake Control) caliper functionality with bi-directional control
- Perform O2 monitor, on-board monitor, I/M readiness and component testing

MD808 PRO



ADDED DIAGNOSTIC FEATURES

DPF SERVICE

Regeneration of diesel particulate filter w

Engine speed	4	1/min
Current injection quantity	0.39	mg/hub
Air mass	0.00	mg/hub
Coolant temperature	288	°F
Total distance at last correction of ash	0	miles


OK

BATTERY RESET

Power supply(Battery)

- Battery
- Close-circuit current
- Activate rest state
- Charging the battery via diagnostic socket
- Auxiliary battery (24 V EPS): Register battery replacement

ENGINE LIVE DATA

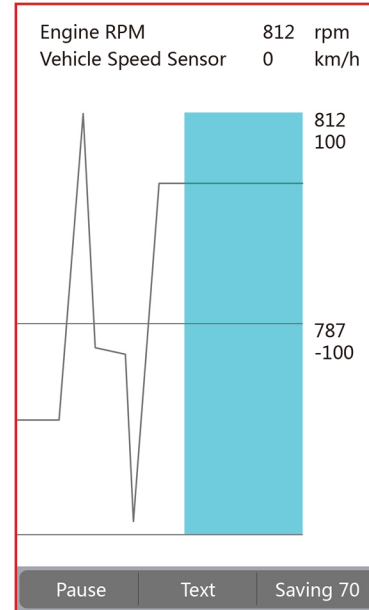

HARDWARE SPECIFICATIONS

EN / ES / FR

Tri-Lingual
Codes & Menus

TFT Color Display

840x480

Grease & Water
resistant

16GB
SD Memory Card

Auto Power Off

Battery Life
Conservation

OPERATING TEMP	-10°C to 60°C (14°F to 140°F)
STORAGE TEMP	-20 to 70°C (-4 to 158°F)
DIMENSIONS	202 mm (8.35") x 92 mm (3.62") x 35 mm (1.4")
NET WEIGHT	313 g (0.69 lb)

PART#

DESCRIPTION

MD808P

MD808 Pro Head Unit, OBDII Cord, Charging Cord, User Manual, Carry Case