

Oil/Water Pressure Programming Quick Reference Guide

Pressure Calibration (Hold for 5 seconds)



Normal Mode



Dial Brightness (press one at a time)



Peak Mode



Factory Default Reset (Hold for 5 seconds)



High Alert Setting Mode



Use LEFT or RIGHT buttons to select high alert warning signal.



Low Alert Setting Mode



Use LEFT or RIGHT buttons to select high alert warning signal.



Color Select Mode




Use LEFT or RIGHT buttons to select illumination color.



Choose from one of seven colors.
Red, Blue, Green, Purple, Yellow,
Orange, White.

Use LEFT or RIGHT buttons to adjust pointer brightness



Pointer Brightness Mode (Hold for 5 seconds)



Dial Brightness Mode




Use LEFT or RIGHT buttons to select Dial Brightness.



Return to Normal Mode



= Save changes and advance to next menu





= Depressed Button



= When pressed together exit menu without changes






Dual Input Fuel Pressure Programming Quick Reference Guide

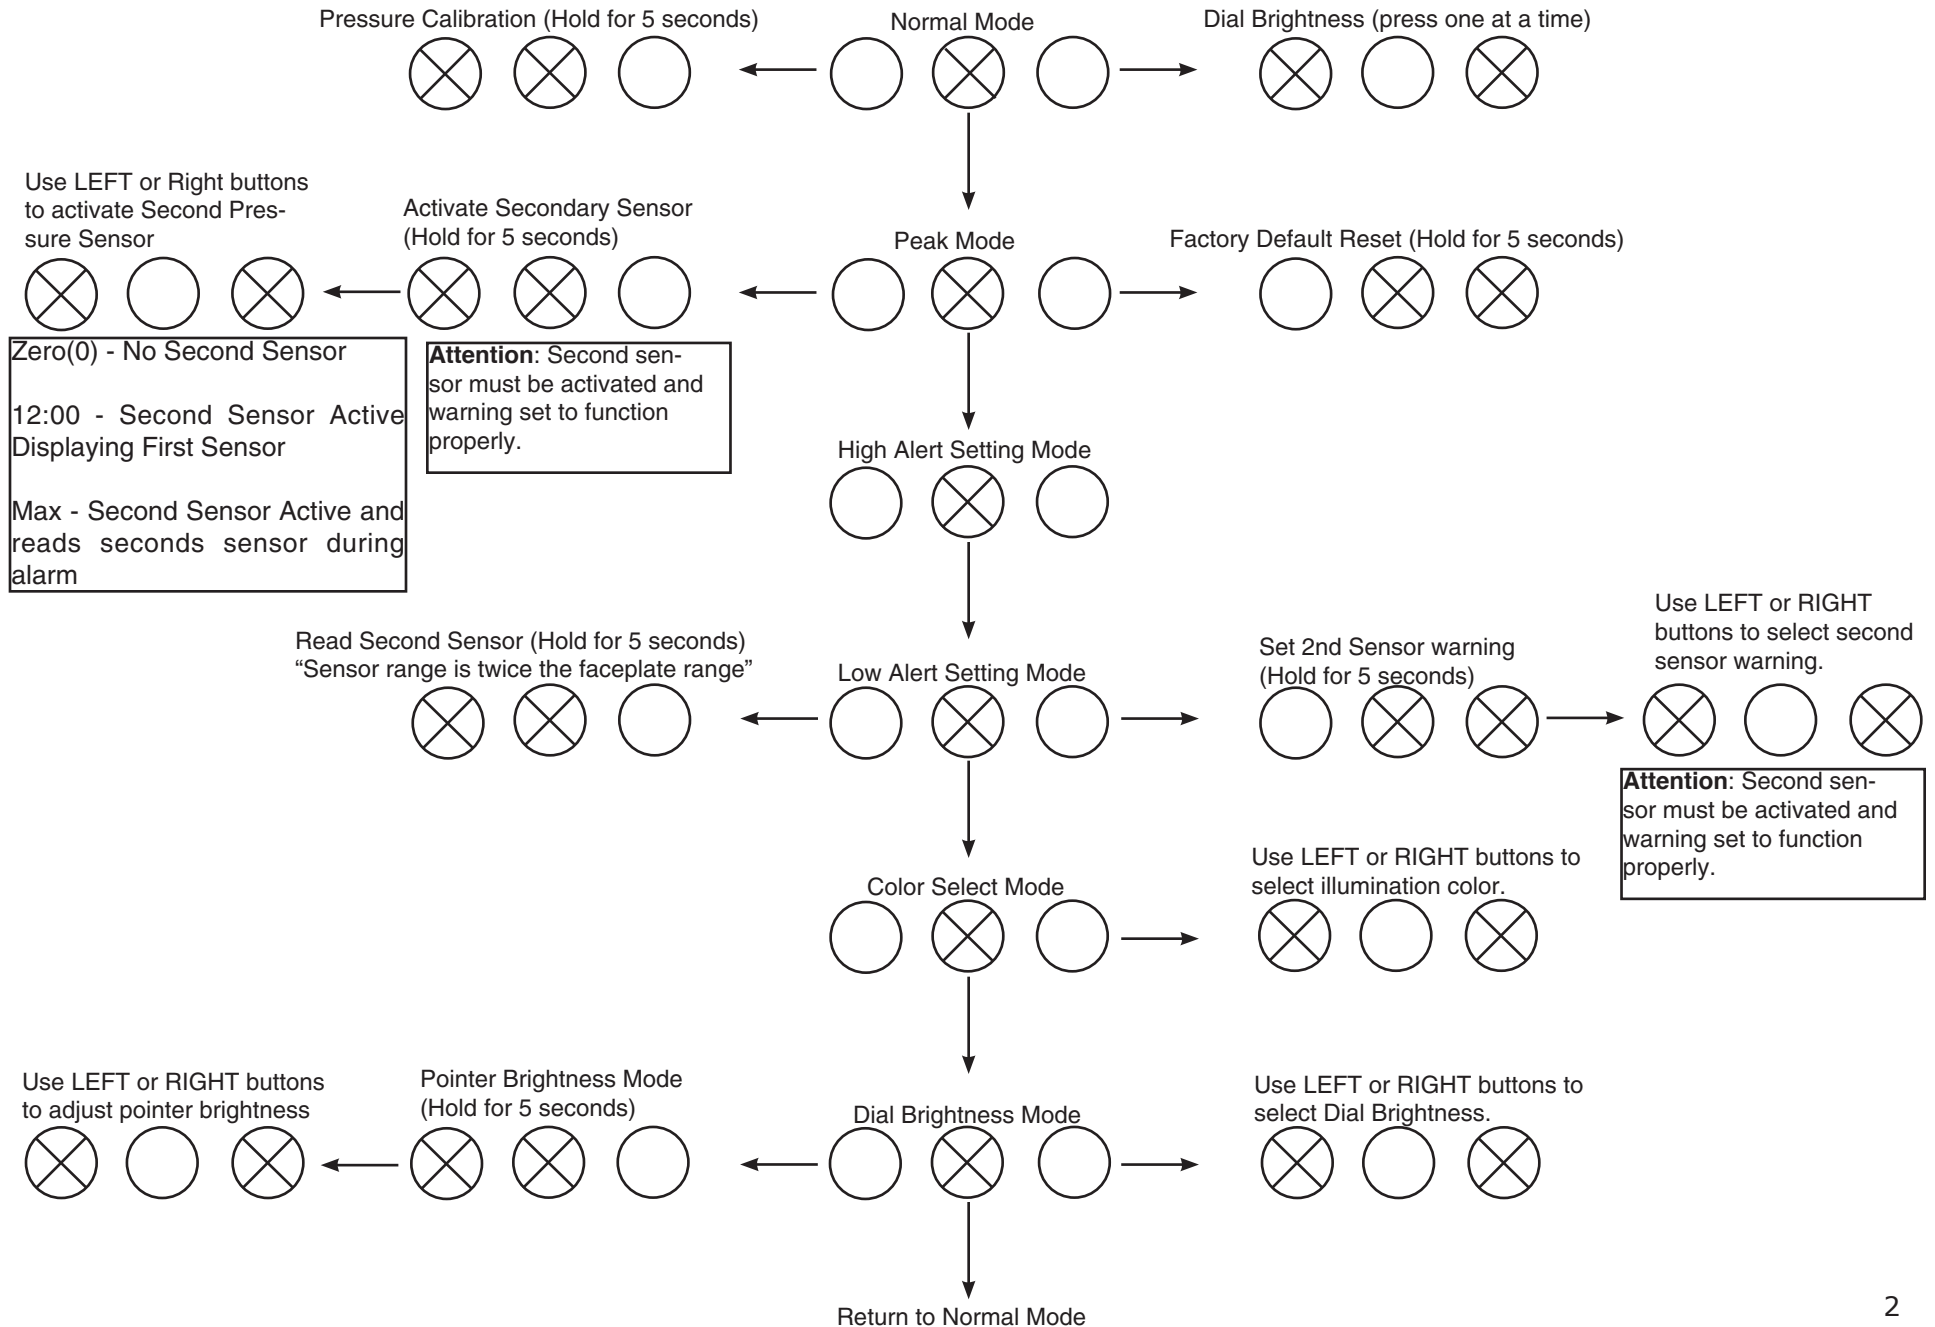







Temperature Programming Quick Reference Guide



Choose from one of seven colors. Red, Blue, Green, Purple, Yellow, Orange, White.

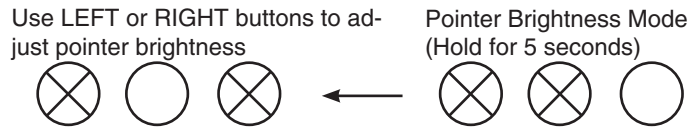


Return to Normal Mode





Tachometer Programming Quick Reference Guide

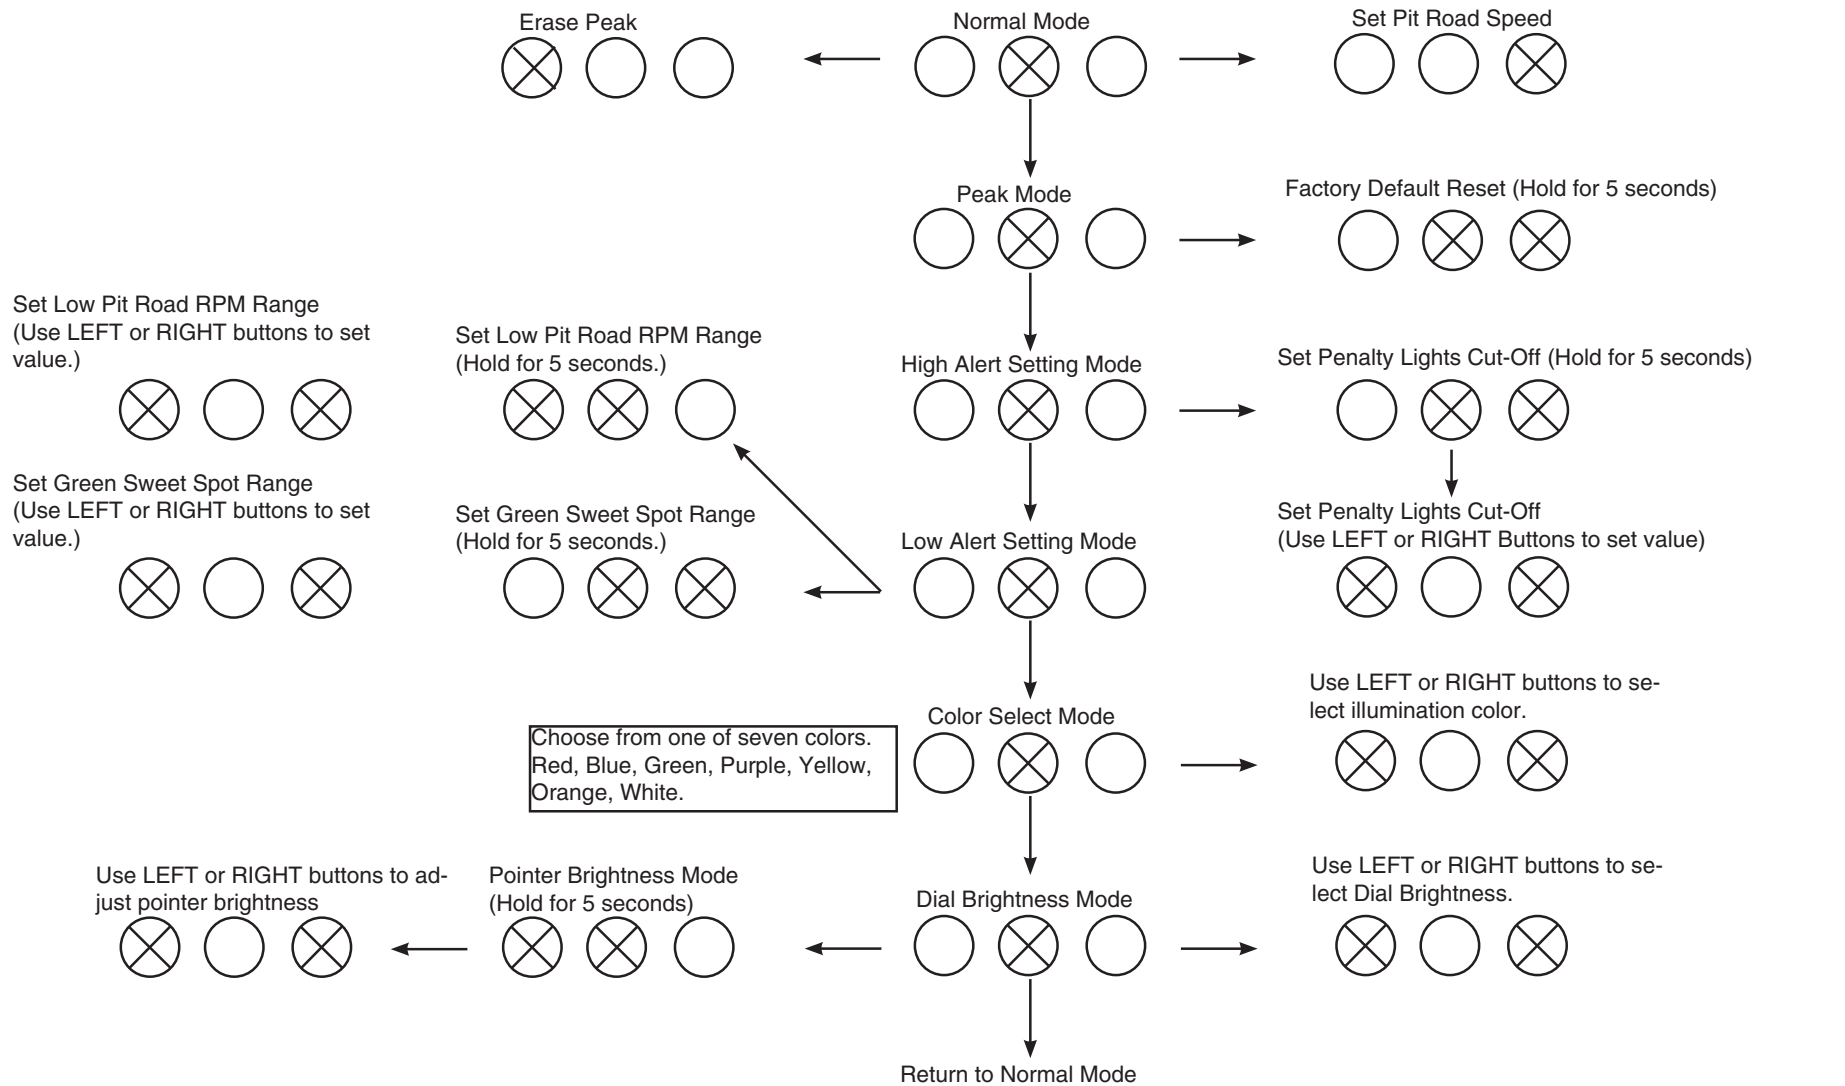

= Save changes and advance to next menu
 = Depressed Button

 = When pressed together exit menu without changes