


# LCD COMPETITION DASH

# THE FUTURE OF AUTOMOTIVE ACQUISITION









- Fully configurable display to the individual
- IP65 sealed against water and dust intrusion
- 7" LCD panel with unmatched brightness and an optically bonded lens for extreme glare suppression.
- Configurable and user definable warning LED's
- Carbon Composite Housing.

Auto Meter is proud to announce our LCD Competition Dash, the next evolution of driver communication and data acquisition, is now shipping! Designed specifically for the harshest of environments, the carbon composite housing is IP65 sealed against water and dust intrusion and will easily withstand 20g of continuous vibration and 50g of shock. Our 7" LCD panel

ensures easy visibility under all circumstances with a retina level pixel density, unmatched brightness and an optically bonded lens for extreme glare suppression. The display layout is fully configurable to your individual specifications. The system will accommodate four programmable data bus channels (2 CAN and 2 serial) in conjunction with a nearly limitless amount of discrete analog sensors and its integrated 3 Axis Accelerometer. Data collection can occur at up to I kHz and the internal memory allows for practically infinite recording time. User definable warnings take advantage of super bright, multicolor LEDs placed around the perimeter of the chassis to alert the driver to critical onscreen information.

# AUTO METER GAUGE TECHNOLOGY

In the Auto Meter gauge offering, you'll find three very different meter movements used in the construction of our instruments. These are Short Sweep Electric (SSE), Full Sweep Mechanical (FSM) and Digital Stepper Motor (DSM). Here we'll touch upon the key differences between them and help to clarify which works best for each type of application and why.

The first type we will discuss, and probably most popular, are our Short Sweep Electric gauges. At the heart of these gauges is Auto Meter's tried and true air core meter movement. An air core, at its essence, is a small magnetic core with copper windings around it that will move in relationship to voltage it sees. This is regulated by an electronic sending unit, which will change its resistance to ground based on the reading. As a temperature or pressure changes, the resistance the gauge measures and thereby the voltage the air core sees varies dictating that the indicator move to a calibrated position on the dial. These gauges are physically differentiated from the other two by their use of a smaller percentage of the dial (90° of rotation), hence "short sweep". Needle movement will most often start around the 9 o'clock position and move to the 3 o'clock position at full scale. Like all Auto Meter instruments, the SSE gauges are designed to be incredibly robust. Our air cores, custom wound in house in Sycamore, are designed to deal with high levels of continuous vibration and incidental shock. It represents a durable, affordable solution that is ideal for most street and mild race applications.

Of note on the air core gauges. There is no return spring or direct physical connection to the zero point on the instrument. As such, when power is removed (ie the vehicle is turned off), it may not always return to zero. This is consistent throughout all of our electronic gauges and allows for an incredibly responsive and fast pointer movement (air core tachs are capable of moving from 0 to 10k rpm in 333 milliseconds). It is not uncommon to see a new gauge in the box where the indicator is not zeroed out. This is totally normal and not indicative of any failure. Because these types of gauges rely heavily on accurate resistance measurements of the sending unit, a good ground is imperative for the best possible results during installation. The gauge will only be as accurate as its ground is good. We recommend a chassis or engine block ground point. A SSE gauge with an inadequate gauge ground will oftentimes read higher than it should, particularly with temperature gauges as they operate over a very wide resistance scale. The sending units SSE gauges utilize are "self grounding", meaning they find their path to ground through the threads or the body of the sending unit. This design does not play well with Teflon tape on the threads as it will impede the path to ground and will often manifest as a sluggish response or a gauge that reads lower than it should. A small dab of liquid Teflon will provide insurance against leaks without the potential for erroneous readings. The sending units do utilize a tapered pipe thread, so leaks are not typically a problem, even without any thread compound whatsoever.

A properly installed SSE gauge will return accuracies levels no worse than +/- 5% at full deflection. While this is often much better, because of the shorter scale and decreased dial resolution in relationship to our full sweep offerings, the pointer width is a limiting factor in how accurately the gauge displays its reading.

The next type of instrument we'll touch on are our Digital Stepper Motor gauges. These highly advanced instruments represent the pinnacle of individual gauge technology and provide the highest possible levels of accuracy, precision, response and durability. Each instrument is controlled by a microprocessor on a circuit board printed in house, which allows for incredibly quick calculations as well as a number of other features not seen in the other gauge types. These gauges utilize race proven sending units for the ultimate in accuracy, no more than +/- 1%. These solid state sending units are the same ones used in many high end data acquisition products. In fact, many of them can simultaneously be used to provide data streams to a logger or standalone engine management system. To further increase accuracy, every time the gauge is powered up it will zero calibrate to assure that even as it wears over a lifetime, it will always remain as accurate as it was the day it was built. These gauges utilize 270° of the dial, making them very easy to read, even at small levels of change. Included with each DSM gauge is a wiring harness specific to the instrument and included sender. These harnesses also provide a ground for the sending unit, so there aren't any concerns about the sending unit ground through the threads affecting instrument accuracy. We still prefer liquid Teflon to the tape, but these also have the bonus of being able to be easily installed even in composite and other non-grounded materials.

Many of our DSM gauges, such as the Elite and SpekPro lines, also include a number of other great features. Because they are microprocessor controlled, these gauges can recall the highest value measured over a period of time (exactly like you'd see in a "tattle tale" tachometer). They will also have user configurable warnings, wherein the instrument will change its lighting at different points on the dial to better communicate certain conditions to the driver. These particular gauges have a high and/or low warning point (depending on series and parameter monitored) in addition to their normal operating color. When either of these warning points are exceeded by a configurable percentage, the gauge will begin to flash to further call attention to itself. You can see these gauges in action in every televised NASCAR race. The instruments used professionally by the teams are off the shelf units with a couple of the features disabled in order to comply with the sanctioning body's rules.

Taking the feature set a step further, these instruments also feature Auto Meter's Pro Control outputs. This allows the gauge to control external devices based on the reading. For example, a water temperature gauge could be used to control electronic fans. Here's a cool example of something we did in the shop recently. One of our techs lost an engine due to oil pump failure. Once the new engine was in, we were able to measure 4 psi of oil pressure being made by just the starter motor. We configured the gauge to not allow the computer to come online until the gauge saw 4 psi of oil pressure. This allowed for us to prime the engine reducing wear and tear during startup. Better yet, should he experience this issue again while out on the track, the gauge would automatically shut down the vehicle if it were to read less than 4 psi, saving the cost of a third engine in one season.

While more expensive than the other gauge types, the DSM gauges represent a great value to the professional and semi pro racer. Because they so easily communicate critical information to the driver, offer unparalleled accuracy and in many cases automatically trigger key condition based events, these gauges can easily be the difference between a lost race and a lost engine. The driver stays more focused on the task at hand, confident that should a condition outside the norm pop up, they'll be warned and be able to easily see exactly what that condition is. There is, quite simply, not a more accurate or durable instrument solution available from any manufacturer, at any price.

The final type of gauge movement we'll touch on are our traditional Full Sweep Mechanical gauges. These gauges make their measurement directly. For example, an oil pressure gauge has a physical oil line running up to the back of the gauge. A temperature gauge will use a long capillary tube, similar to an old style glass thermometer. A bulb on the end of this tube is heated and a ether gas, encapsulated within the tube expands, pushing the meter movement forward and displaying the temperature. The advantage to this is they can be run completely without electricity (only the light requires any power). A vehicle shut off in the pits will still display the current temperature. While best suited for race applications, FSM gauges are not as ideal a solution for street applications because of the fluids being passed through the firewall. The physical connections necessary are often more bulky and difficult to install as well. The most common contradiction we see to this rule is with boost or air pressure gauges, where a simple air line is run to the gauge, rather than a heated fluid or flammable liquid. A FSM fuel pressure gauge will need to be mounted outside of the vehicle for safety or a gauge isolator will need to be used. These gauges do use the entire 270° of the dial like a DSM gauge and are very easy to read. Accuracy is very good, with no more than a +/- 3% variance at full deflection commonly observed. Based on the scale, a SSE gauge returns very similar real world accuracy. These meter movements are also ruggedized for extreme situations and are even available filled with liquid silicone for additional dampening for use in high shock or vibration environments such as desert racing or drag racing applications that experience tire shake. They tend to cost a bit more than their SSE electric counterparts but do undercut the DSM gauges on price.

Regardless of the choice of movements you make, each Auto Meter gauge is engineered, built and calibrated by our skilled technicians here in Sycamore. We take great pride in offering the finest American instruments in all price points for all applications. With more motorsports wins than all other gauge manufacturers combined, our nearly 60 years of excellence assures you the performance and durability necessary to achieve whatever goals you have for your project.

DIGITAL STEPPER MOTOR



SHORT SWEEP ELECTRIC



FULL SWEEP MECHANICAL



# PRODUCT Features

#### WIDEBAND AIR/FUEL RATIO GAUGES

A Wideband Air/Fuel Gauge is one of the most critical instruments on any high performance vehicle. Allowing for real time measurement of your fuel mixture, these gauges are tremendously valuable in helping to safely extract the most power from your engine and keep it running longer. Auto Meter's line of Wideband Air/Fuel gauges provide best in class accuracy and response. With automatic calibration on every startup, you're assured of reliable readings for the life of the sensor (no Free Air calibration ever). All of our Wideband instruments feature analog outputs for easy integration with data acquisition or stand alone engine management systems. The Auto Meter Pro and Pro Plus add compatibility with nearly all fuel types, peak lean recall with alarm and automatic dimming. The Pro Plus goes further with serial data output for tuning or EFI systems and features a Pro Control Output to trigger external devices based on fuel mixture. All of the gauges include a high precision sensor and a wiring harness. Everything you need for most installations (down to the stainless weld in bung for the exhaust) is included in the box.

PRODUCT FEATURES	STREET	ANALOG	PRO	PRO PLUS
MIXTURE DISPLAY TYPE	AFR	AFR	AFR OR LAMBDA	AFR OR LAMBDA
WIDE OPEN THROTTLE LEANEST MIXTURE PEAK RECALL			1	1
PROGRAMMABLE LEAN CONDITION ALARM			/	/
PROGRAMMABLE 0-4V OUTPUT FOR ECU OR DATA ACQUISITION USE	/	/	/	
PROGRAMMABLE 0-5V OUTPUT FOR ECU OR DATA ACQUISITION USE				/
DISPLAY RANGE	10:1-17:1	8:1-18:1	PROGRAMMABLE	PROGRAMMABLE
SUITABLE FOR USE WITH GASOLINE POWERED ENGINES	/	/	/	/
ADJUSTABLE STOICHIOMETRIC POINT FOR USE WITH ALTERNATE FUEL TYPES (ETHANOL, METHANOL, PROPANE, CNG)			1	/
DISPLAY TYPE	DIGITAL & LED RADIAL	POINTER	DIGITAL & LED RADIAL	DIGITAL & LED RADIAL
RADIAL BAR GRAPH LED DISPLAY SEGMENTS	16		30	30
DISPLAY BRIGHTNESS ADJUSTMENT	MANUAL	MANUAL	AUTOMATIC	AUTOMATIC
INCLUDES .1 AFR RESOLUTION BOSCH LSU4.2 SENSOR AND WIRING HARNESS	1	/	/	
INCLUDES ADVANCED .1 AFR RESOLUTION BOSCH LSU 4.9 SENSOR AND WIRING HARNESS				/
SERIAL DATA OUTPUT				/
PRO-CONTROL OUTPUT				/

# Instruments



AIR/FUEL RATIO WIDEBAND



# ANALOG

AIR/FUEL RATIO WIDEBAND



# PRO

AIR/FUEL RATIO WIDEBAND



## PROGRAMMABLE FUEL LEVEL GAUGES

Planning to replace your fuel level gauge or add a fuel level gauge to an unknown tank and sending unit combination? Our Programmable Fuel Level gauges are the best solution. These 270 degree sweep digital stepper motor gauges come pre-programmed to work with the 7 most common preset sending unit values in the industry. In the event that your sending unit values do not match one of these presets, these gauges feature easy programming that allows you to tailor the gauge scale precisely to your set-up with no frustration or added cost. Ideal for Imports, Modern Muscle, and Street Rods! (Works with combinations up to 280 OHMS)



#### **ELECTRIC PROGRAMMABLE SPEEDOMETERS**

Looking to replace your speedometer? Our Electric Programmable Speedometers are the ticket! Simple wiring connections and easy to use push button programming make installation and calibration a snap. Compatible with most OE vehicle speed sensors, as well as aftermarket speed pulse generators. Auto Meter Electric Programmable Speedometers can be easily recalibrated at any time for any gear or wheel & tire changes you may make to your vehicle. Compatible with 5289 GPS Module for calibration free installation.



#### PERIMETER INCANDESCENT LIGHTING

Auto Meter instruments with Perimeter Incandescent Lighting utilize white light bulbs to spill soft light around the edges of the instrument dial and reflected off of a three dimensional pointer design for night time illumination that's easy on the eyes. Red and Green bulb covers are included to allow you to customize the illumination color. If you're looking for more color with these instruments, check out our Replacement LED bulbs in the Accessories section. Available in Red, Green, Blue, Amber, & White LED bulbs draw less current, produce brighter colored light, are more vibration resistant and are longer lasting than conventional bulbs.





(Shown with White LED Lighting)

#### HI-DEF THROUGH DIAL & FULL DIAL LED LIGHTING

Auto Meter instruments with Hi-Def Through Dial & Full Dial LED Lighting feature bright, crisp, and distinctly illuminated numbers, increments, and a glowing lit pointer! Our Hi-Def style Through Dial & Full Dial LED Lighting is the brightest available, utilizing special composite dials, surface mount LEDs, and a patented lit pointer design to provide maximum visibility and readability day or night! Illumination colors are standard/unchangeable unless specifically noted otherwise (Elite & Spek-Pro). LED replacement bulbs not compatible with Through Dial & Full Dial LED lit designs.





## **DUAL RANGE TACHOMETERS**

Dual-Range Tachometers from Auto Meter feature a compressed lower RPM scale and an expanded upper scale for enhanced clarity and extreme resolution where it counts! These tachometers are ideal for high-revving motors that spend most of their time in the upper rev band, such high performance applications include drag & road racing, circle track, and drift vehicles. Dual-Range tachometers also feature Memory/Recall so that you can review the highest RPMs achieved while you were out on the track from the comfort of the pits.



## WARNING & SHIFT LITE

When fractions of a second count, and 1 psi of boost separates big power from big problems, use Auto Meter instruments featuring Warn and Shift-Lite functions to nail every shift point and tune your ride to perfection!

Created with the driver in mind, instruments with Warn and Shift-Lite functions have easy to use push button & dial-in accuracy so each warning and shift point is an exact match for your vehicle and driving style. Super Bright incandescent bulbs & LEDs built into instruments with these features provide an instant visual alert to critical conditions (ideal for noisy high performance and race vehicles), and can make the difference between a checkered flag and an expensive DNF!





## LAUNCH LITE

Improve reaction times and nail launch RPMs with tachometers and Digital Pro Shift lights from Auto Meter featuring our patented Launch Lite! Dial in exact launch RPM with easy push button programming, then keep your eyes on the tree and let Launch Lite show you when you're at the correct launch RPM.



Stage your vehicle with the Launch Lite feature active:

- · Launch Lite/Shift light will turn off when engine RPM drops below your launch point
- Launch Lite/Shift light will light solid when engine RPM is at your launch point
- · Launch Lite/Shift light will flash rapidly if engine RPM raises above your launch point





# **TACHOMETERS**

			PED	ES'	ΓΑΙ	L MO	UNT	TAC	НО	MET	==	S			
DESCRIPTION	RANGE	SIZE 2-3/4"	SIZE 2-5/8"	SIZE 3-3/4"	SIZE 5"	AUTOGAGE	CARBON FIBER	CHEVY BOWTIE	COBALT	COPO CAMARO	C2	ES	FORD RACING	GM PERFORMANCE	GS
AUTOGAGE-BLACK	6K RPM	Х				2306					98				
AUTOGAGE-BLACK	8K RPM	Х				2305									
AUT OGAGE-BLACK	8K RPM			Х		2300, 2301					7.5		ii .		
AUT OGAGE-WHITE	8K RPM			Х		2303, 2304					i				
DIESEL	5K RPM	Х													
EXT. SHIFT-LITE	8K RPM			Х		2309									
EXT. SHIFT-LITE	8K RPM				Х	233905	-				7/3				
EXT. SHIFT-LITE	IOK RPM				Х	233904, 233911	4899	3699-00406	6299	880445	7299	5999	880118/880281 Cobrajet	5899-00406/07	3899
INT. SHIFT-LITE	I OK RPM				Х	233903									
DIESEL, MEMORY	6K RPM				Х		9								
MEMORY	9K RPM				Х						- 4				
MEMORY	10K RPM			Х											
MEMORY	I OK RPM				Х	233902, 233907									
MEMORY	II K RPM				Х										
MEMORY & SHIFT-LITE	I OK RPM				Х	233906									
MEMORY, 2 STG SHFT-LITE	9K RPM				Х								ř.		
MEMORY, 2 STG SHFT-LITE	II K RPM				Х								1 to		
MEMORY, 2 STG SHFT-LITE	9K RPM Dual				Х										
MEMORY, 2 STG SHFT-LITE	II K RPM Dual				Х										
MEMORY, 4 STG SHIFT-LITE	9K RPM				Х		6835		2			7			
MEMORY, 4 STG SHIFT-LITE	II K RPM				Х		6836								
PLAYBACK	9K RPM				Х										
PLAYBACK	II K RPM				Х										
ULTIMATE III-BLACK PLAYBACK	9K RPM				Х			i i					ř.		
ULTIMATE III-BLACK PLAYBACK	II K RPM				Х								00		
ULTIMATE III-SILVER PLAYBACK	9K RPM				Х						J.		0		
ULTIMATE III-SILVER PLA/BACK	II K RPM				Х						- 2		2		
ULTIMATE DEBLACK PLAYBACK	9K RPM				Х				i i		i i		*		
ULTIMATE DI-BLACK PLAYSACK	II K RPM				Х										
ULTIMATE DESILVER PLABACK	9K RPM				Х						į į				
ULTIMATE DESILVER PLABACE	II K RPM				Х								9		
RETRO SHORT SWEEP	8K RPM		1	Х								7	9		
SHIFT-LITE, DIAL	8K RPM			Х		2302					18	8			
STANDARD	4K RPM		Х												
STANDARD	8K RPM			Х										5780-00406/07	
STANDARD	8K RPM				Х										
STANDARD	I OK RPM			Х							- 1				
STANDARD	IOK RPM				Х						l l		Ő.		
TACHOMETER	6K RPM		Х												
TACHOMETER	8K RPM		Х									6 6			

				INI	DAS	3H 7	<b>FAC</b>	HON	1ETE	RS	3			
DESCRIPTION	RANGE	SIZE	CARBON FIBER	CHEVY BOWTIE	COBALT	COBRA	α	COBALT DIGITAL	ES	ELITE	FORD RACING	GM PERFORMANCE	GS .	GT
TACH	5K RPM	2-1/16"												
TACH	8K RPM	2-1/16"												
TACH	II K RPM	2-1/16"												0
TACH	8K RPM	3-3/8"												8097
TACH	IOK RPM	3-3/8"	4798	3697-00406	6297		7297	6997	5997	5697	880084		3897	
TACH	8K RPM	4"				201004								
MEMORY	I OK RPM	5"	4894											T
MEMORY	10K RPM Dual	5"												
TACH	8K RPM	5"												8098
TACH	IOK RPM	5"	4898		6298		7298					5898-00406/7		
TACH	I I K RPM	5"												

# **SPEEDOMETER CHARTS (LED LIGHTING & DIGITAL)**

DESCRIPTION	RANGE	ELECTRIC PROGRAMMABLE	MECH	GPS	COBALT		COBALT DIGITAL	C	2	CHEVY BOWTIE	FORD RACING	ELITE	ES	GS	6	ŝΤ
					3-3/8"	5"	3-3/8"	3-3/8"	5"	3-3/8"	3-3/8"	3-3/8"	3-3/8"	3-3/8"	3-3/8"	5"
SPEEDO	140 MPH			X	6280	6281										
SPEEDO	160 MPH		X		6293			7293								
SPEEDO	160 MPH	X			6288	6289		7288	7289	3688-00406	880082	5688	5988	3888	8088	8089
SPEEDO	180 MPH	Х										12				
SPFFDO	200 MPH	X	Г	Г			6988									

# SPEEDOMETER CHARTS (AROUND-THE-DIAL LIGHTING)

RANGE	ELECTRIC PROGRAMMABLE	MECH	REVERSE ROTATION	GPS	CARBON	FIBER	COBRA	GM PERF	JEEP	PHAN	том	PRO-	COMP	SPORT-	COMP	TRAD CHROME	ULTR.	A-LITE	ZSERIES
					3-3/8"	5"	4'	5"	3-3/8"	33/8"	5"	3-3/8"	5"	3-3/8"	5"	3-3/8"	3-3/8"	5"	3-3/8"
120 MPH	Х				0				55,636.51	5887				3987		50000	4487		
120 MPH	0	X							880245	5892		5152		3992	3994	2492	4492		2692
140 MPH	Х			Х						5880	5881			3982	3983	2480	4480	4481	2680
160 MPH	Х				4789	4889		5889-00406/7	880244	5888	5889		5189	3988	3989	2489	4488	4489	
160 MPH		X	T. T							5893	5895	5153	5154		3995	2494	4493	4495	2694
180 MPH	Х		Х				201013												
180 MPH		Х	Х				201005												
190 KPH	Х									5887-M				3987-M			4487-M		
200 MPH	Х																4486	4490	
200 MPH		X									5896		5156					4496	
260 KPH	X																	4489-M	

# **TACHOMETERS**

METERS	CHC	TΑ	JT.	JUI	MC	ΓAL	DEST	PE								
DESCRIPTION	RANGE	SIZE 5"	SIZE 3-3/4"	SIZE 2-5/8"	SIZE 2-3/4"	Z-SERIES	TRAD CHROME	ULTRA-LITE II	ULTRA-LITE	SPORT-COMP II	SPORT-COMP	PRO-COMP	PHANTOM II	PHANTOM	NV	MOPAR
AUTOGAGE-BLACK	6K RPM				Х											
AUTOGAGE-BLACK	8K RPM				Х											
AUTOGAGE-BLACK	8K RPM		Х													
AUT OGAGE-WHITE	8K RPM		Х					i i								
DIESEL	5K RPM				Х	2888	I.		3788							
EXT. SHIFT-LITE	8K RPM	, ,	Х				4									
EXT. SHIFT-LITE	8K RPM	Х									3905					1
EXT. SHIFT-LITE	IOK RPM	х						4999	3911	3699	3904		7599	5899	7499	880248
INT. SHIFT-LITE	IOK RPM	Х									3903					
DIESEL, MEMORY	6K RPM	Х										6806				
MEMORY	9K RPM	Х										6809				
MEMORY	IOK RPM		Х						6604			6601				
MEMORY	IOK RPM	Х												5795		
MEMORY	II K RPM	Х										6811				
MEMORY & SHIFT-LITE	IOK RPM	Х									3906					
MEMORY, 2 STG SHFT-LITE	9K RPM	Х							6856			6851				9
MEMORY, 2 STG SHFT-LITE	II K RPM	Х					II .		6858			6857				
MEMORY, 2 STG SHFT-LITE	9K RPM Dual	Х							6854			6852				8
MEMORY, 2 STG SHFT-LITE	II K RPM Dual	Х							6855	ĺ						
MEMORY, 4 STG SHIFT-LITE	9K RPM	Х							6832							- 0
MEMORY, 4 STG SHIFT-LITE	II K RPM	Х							6834							
PLAYBACK	9K RPM	Х							3964		3966					
PLAYBACK	II K RPM	Х							3965		3967					
ULTIMATE III-BLACK PLAYBACK	9K RPM	Х								6887			i			
ULTIMATE III-BLACK PLAYBACK	II K RPM	Х								6888						
ULTIMATE III-SILVER PLAYBACK	9K RPM	Х						6882	i,							
ULTIMATE III-SILVER PLAYBACK	II K RPM	Х						6886								
ULTIMATE DI-BLACK PLAYBACK	9K RPM	X					2			6896					8	
ULTIMATE DI-BLACK PLAYBACK	II K RPM	Х								6897						i i
ULTIMATE DI-SILVER PLAYBACK	9K RPM	Х						6894	į.							
ULTIMATE DI-SILVER PLAYBACK	II K RPM	Х						6895								
SHORT SWEEP RETRO	8K RPM		Х				2897						fi			1
SHIFT-LITE, DIAL	8K RPM		Х										î .			
STANDARD	4K RPM			X		2890										
STANDARD	8K RPM		Х		- 0	2894	2895		3781		3780			5780		
STANDARD	8K RPM	Х									3980					
STANDARD	IOK RPM		Х								3700	5610				
STANDARD	IOK RPM	Х							3910		3900					
TACHOMETER	6K RPM	_		Х		2891										
TACHOMETER	8K RPM			Х		2892	2893		3707		3708				8	7

						IN	DA	SH T	AC	HO	MET	ER	S				
JEEP	NV	PHANTOM	PHANTOM II	PRO-COMP	SPEK-PRO	SPORT-COMP	SPORT-COMP II	SPORT-COMP DIGITAL	ULTRA-LITE	ULTRA-LITE II	ULTRA-LITE DIGITAL	ULTRA-NITE	TRADITIONAL CHROME	Z-SERIES	SIZE	RANGE	DESCRIPTION
														2697	2-1/16"	5K RPM	TACH
					P334328									2698	2-1/16"	8K RPM	TACH
					P336328										2-1/16"	II K RPM	TACH
880246						3991							2499	2699	3-3/8"	8K RPM	TACH
	7497	5897	7597	5161				6397	4497	4997	6597				3-3/8"	IOK RPM	TACH
															4"	8K RPM	TACH
				6801					4494			4594			5"	IOK RPM	MEMORY
									4499						5"	IOK RPM Dual	MEMORY
					P238328										5"	8K RPM	TACH
	7498	5898	7598	5160		3990	3698		4498	4998					5"	IOK RPM	TACH
					P239328					300000000000000000000000000000000000000					5"	II K RPM	TACH

# SPEEDOMETER CHARTS (LED LIGHTING & DIGITAL)

N	IV	PH	ANTOM II	SPEK-PRO	SPORT-C	OMP II	ULTRA-L	ITE II	ULTRA-LITE DIGITAL	SPORT-COMP DIGITAL	GPS	MECH	ELECTRIC PROGRAMMABLE	RANGE	DESCRIPTION
3-3/8"	5"	3-3/8"	5"	5"	3-3/8"	5"	3-3/8"	5"	3-3/8"	3-3/8"					
		7580	7581		3680	3681	4980	4981			X			140 MPH	SPEEDO
		7596			3693		4993				П	X		160 MPH	SPEEDO
7488	7489	7588	7589		3688	3689	4988	4989					X	160 MPH	SPEEDO
				P230328									Χ	180 MPH	SPEEDO
								T	6588	6388		ПП	X	200 MPH	SPEEDO

		A 1 1		ACE C		_			
		AU			<b>SAUGE</b>				
DESCRIPTION	RANGE	SILVER W/ PANEL	SHORT SWEEP	FULL SWEEP	ELECTRIC	MECHANICAL	SIZE  -1/2"	2-1/16"	2-5/8"
BOOST/VACCUUM	30 IN HG/20 PSI			Х		Х			2310
FUEL LEVEL	0 E/90 F		Х		Х				2316
UEL LEVEL	73 E/I 0 F		Х		X				2315
UEL PRESS	0-15 PSI		Х			Х			2311
OIL PRESS	0-100 PSI		Х		X		2354	100000000	
DIL PRESS	0-100 PSI			Х	77700	Х		2332	2312
OIL PRESS	0-100 PSI		Х			Х		2360	
OIL TEMP	100-340°F			Х		Х		2314	
PRESSURE	0-100 PSI	Х		X		Х		2334	
EMPERATURE	140-280°F	Х	į.	Х		Х		2335	
/ACUUM	30 In. HG			X		Х		2337	2317
OLTMETER	8-18 Volts	Х	Х		X		2356	2380	
OLTMETER	10-16 Volts		Х		Х				2319
WATER TEMP	100-280°F		X		X	7	2355		
WATER TEMP	100-280°F			X		Х		2333	2313
WATER TEMP	130-280°F			X		X	2352		
WATER TEMP	130-280°F		Х	1000		X		2361	

# GAUGE CHARTS (AROUND-THE-DIAL LIGHTING)

DESCRIPTION	RANGE	FULL	SHORT SWEEP	DSM	MECH	CARBON	FIBER	COBRA	GM	JEEP	PHANTO	м	PRO-COMP
		SWEEP	ELECTRIC		$ldsymbol{ldsymbol{eta}}$	2-1/16"	2-5/8"	2-1/16"	2-5/8"	2-1/16"	2-1/1 6"	2-5/8"	2-5/8"
A/F RATIO, Analog	8:I-18:I AFR	X		Х		4770			-		5770	5879	
A/F RATIO, Pro A/F RATIO, Pro Plus	6:I-18:I AFR-Rich 0-5v 8:I-18:I AFR	X				4778					5778		
A/F RATIO, Street	Lean-Rich, 0-ly	X									5779		
AIR PRESSURE	0-150 PSI	Х			Х	4720					5720		
DUAL AIR TEMPERATURE	0-300°F	Х		Х							5758		
AXLE TEMP	100-250°F	_	Х							880431	F702	-	
BOOST CONTROLLER BOOST PRESS	0-15 PSI	X		Х							5782 5750		
BOOST PRESS	0-15 PSI	X		À	Х						5702	5802	
BOOST PRESS	0-35 PSI	X			X	4704					5704	$\Box$	5404
BOOST PRESS/BLOWER PRESS BOOST PRESS	0-60 PSI 0-100 PSI	X			X						5705 5706		5402
BRAKE PRESS	0-1600 PSI	X		Х	^		4867				3700		
BRAKE PRESS	0-2000 PSI	Х			Х								5426
CLOCK CYL. HEAD TEMP.	Analog 12 HR 140-340°F	X	X	Х				201019			5785	5885	
DIESEL RAIL PRESS	0-30,000 PSI	Х		X							5786/5793		
DIFF. TEMP.	100-250°F		Х								5749		
EXHAUST PRESS EXHAUST PRESS	0-60 PSI 0-100 PSI	X			X						5725 5726		
EXHAUST PRESS	0-60 PSI	X		Х	^						5792		
EXHAUST PRESS	0-100 PSI	X		X							5794		
FUEL LEVEL	0 E/30 F		X			4714	4014		E014 00407	000242	5717	5817	FAIF
FUEL LEVEL	0 E/90 F 16 E/158 F		X			4714 4718	4814	201975	5814-00406/7	880243	5714 5718	5814	5415
FUEL LEVEL	240 E/33 F		x			4716	4816	201973			5716	5816	5417
FUEL LEVEL	73 E/I0 F		Х			4715	4815			880428	5715	5815	5416
FUEL LEVEL (LINEAR)	73 E/I0 F	v	X	Х							5719		
FUEL LEVEL FUEL PRESS	Programmable 0-15 PSI	X		X							5710 5761		5461
FUEL PRESS / Pk&Wrn	0-15 PSI	Х		Х									
FUEL PRESS	0-15 PSI	X			X	4711	4811		F012 0040/7			5810	5411
FUEL PRESS/ISO FUEL PRESS	0-15 PSI 0-30 PSI	X	į.	Х	Х	2	4813		5813-00406/7		5760	5813	5413
FUEL PRESS	0-100 PSI	X		X		4763	4863				5763	5863	
FUEL PRESS / Pk&Wrn	0-100 PSI	Х		Х		4210	1010						
FUEL PRESS FUEL PRESS	0-100 PSI 0-1.0 Bar	X			X	4712	4812		5812-00407		5712 5711-M	5812	5412
FUEL PRESS	0-1.0 Bar	X		Х	^						5763-M		
FUEL PRESS	0-7Kg/Cm2	Х			Х								
HOURMETER	8-32 volts 0-4000 PSI FORD		Х										
HPOP PRESS	PWRSTROKE	X		Х							5796		
NITROUS PRESS	0-1600 PSI	Х		Х		4774					5774		
NITROUS PRESS	0-2000 PSI	X		v	Х	4728	4828		5828-00406/7		5728	5828	,
OIL PRESS/Pk&Wrn OIL PRESS	0-100 PSI 0-100 PSI	X	X	X		4727	4827		5827-00406/7	880240	5727	5827	5427
OIL PRESS	0-100 PSI	Х			Х	4721	4821	201006	5821-00406/7		5721	5821	5421
OIL PRESS	0-150 PSI	X			X						5723	5823	F433
OIL PRESS OIL PRESS	0-200 PSI 0-7 Bars	Α.	Х		Х						5727-M	5822	5422
OIL PRESS	0-7Kg/Cm2	Х	<u> </u>		Х						372711		
OIL PRESS	0-14 Kg/Cm2	Х	V		Х					000420		5047	
OIL TEMP OIL TEMP/Pk&Wrn	100-250°F 100-340°F	Х	Х	Х		8 3				880429	5747	5847	
OIL TEMP	140-280°F	X		^	Х	4741	4841				5741	5841	5441/5443
OIL TEMP	140-300°F		Х			4748	4848						5447
OIL TEMP OIL TEMP	140-340°F 40-120°C	X	Х		Х								
OIL TEMP	60-140°C	Х	^		Х			201008					
OIL TEMP	60-170°C		Х								5748-M		
PRESSURE	0-300 PSI	X			X								5423
PRESSURE PRESSURE	0-400 PSI 0-600 PSI	X			X								5424 5425
PRNDL +	DIG. GEAR POS.										5759		- 120
PYROMETER KIT	PLUS INDCATOR 0-I 600°F	v		v		4744					5744	5844	5444
PYROMETER KIT	0-2000°F	X		X		4/44					5745	3044	3444
PYROMETER KIT	0-900°C	Х		X							5744-M		
TEMP	140-340°F	X	v		Х					000430			5435
TRANSFER CASE TEMP TRANS TEMP	100-250°F 100-250°F		X			4757				880430 880260	5757	5857	5457
TRANS TEMP	100-250°F	Х		Х		7,31				000200	3/3/	3037	J73/
TRANS TEMP	140-280°F	Х			X	470.1	4851					5851	5451
VACUUM	30 In. HG	X		X	Х	4784	4884 4871				5784	5884	5484
VACUUM VOLTMETER	30 In. HG 8-18 Volts	, A	X			4791	4871	201019	5891-00406/7	880242	5791	5891	5492
VOLTMTR/Pk&Wrn	8-18 Volts	Х		Х				_3,017	20,100,100,1	JOVATA	31,71	20,1	
VOLTMETER	10-16 Volts		X										
							1	1			1	1 1	
VOLTMETER	16-36 Volts	Y	^		Y								
	0-35 Volts 0-35psi 0-60psi	X	_		X								

# (AROUND-THE-DIAL LIGHTING) GAUGE CHARTS

SPORT-		TRADITIONAL CHROME 2-1/16"	2-1/1 6"	2-5/8"	UL LIQUID FILLED 2-5/8"	ULTRA-NITE	UN LIQUID FILLED 2-5/8"	Z-SERIES 2-1/1 6"	FULL	SHORT SWEEP ELECTRIC	DSM	MECH	RANGE	DESCRIPTION
3370	3579	2-1/10	4370	4479	2-5/0	2-5/0	2-3/0	2-1/10	Х		Х		8:I-I 8:I AFR	A/F RATIO, Analo
			4378						Х				6:I-18:I AFR-Rich 0-5v	A/F RATIO, Pr
3397			4397 4379						X				8:I-18:I AFR	A/F RATIO, Pro Plu
3379 3320			4379					2620	X		1	Х	Lean-Rich, 0-lv 0-l50 PSI	A/F RATIO, Stree
3358			4358					2020	X		Х	L^	0-300°F	DUAL AIR TEMPERATURE
										Х			100-250°F	AXLE TEM
3381 3350			4381 4350					2681	X		X		30 HG IN 30 PSI 0-15 PSI	BOOST CONTROLLE BOOST PRES
3302			4302						X		1^	Х	0-15 PSI	BOOST PRES
3304	3404		4304	4404				2616	Х			X	0-35 PSI	BOOST PRES
	3402		4305 4306	4402	4602			2617 2618	X		-	X	0-60 PSI 0-100 PSI	BLOWER PRESS/BOOST PRESS BOOST PRESS
			1500	4467				2010	Х	1	Х		0-1600 PSI	BRAKE PRES
2	2505	2505	4205	4426	4626			2/22	X			Х	0-2000 PSI	BRAKE PRES
3336	3585 3536	2585	4385 4336	4485				2632	Х	Х	X		Analog 12 Hr 140-340°F	CLOCK CYL. HEAD TEM
			4386/ 4393					2686/2693	Х		X		0-30,000 PSI	DIESEL RAIL PRESS
3349			4349 4325					2636	v	Х		Х	100-250°F	DIFF. TEMP
			4325					2611 2619	X			X	0-60 PSI 0-100 PSI	EXHAUST PRESS
			4392					2672	Х		X		0-60 PSI	EXHAUST PRESS
3317	3517	2517	4394 4317	4417				2674 2648	Х	X	X		0-100 PSI 0 E/30 F	EXHAUST PRESS FUEL LEVEL
3314	3514	2514	4314	4414				2641	3	X	10		0 E/90 F	FUEL LEVEL
3318	3518	2518	4318	4418						X			16 E/158 F	FUEL LEVEI
3316 3315	3516 3515	2516 2515	4316 4315	4416				2643 2642		X			240 E/33 F 73 E/10 F	FUEL LEVEI FUEL LEVEI
3319	3313	2519	4313	4413				2650		X			73 E/I 0 F	FUEL LEVEL (LINEAR)
3310			4310						Х		X		Programmable	FUEL LEVEL
3361	3561		4367	4470				2661	X		X		0-15 PSI 0-15 PSI	FUEL PRESS/Pk&Wrr
3311	3411	2411	4311	4411	4611	4511	4211	2603	X		_ ^	Х	0-15 PSI	FUEL PRESS
3313	3413	2413	4313	4413				2//0	X		Ų	X	0-15 PSI	FUEL PRESS/ISO
3363	3563		4360					2660 2663	X		X		0-30 PSI 0-100 PSI	FUEL PRESS
300000000000000000000000000000000000000			4371	4472				***********	X		X		0-100 PSI	FUEL PRESS/Pk&Wrr
3312 3311-M	3412	2412	4312 4311-M	4412	4612			2612	X			X	0-100 PSI 0-1.0 Bar	FUEL PRESS
3363-M			4363-M						X		Х	1	0-1.0 Bar	FUEL PRESS
3312-J	3412-J								Χ			Х	0-7Kg/Cm2	FUEL PRESS
		2587							100	X			0-4000 PSI FORD	HOURMETER
			4396				0	2696	Х		X		PWRSTROKE	HPOP PRESS
3374	3574		4374 4328	4474					X		X	X	0-1600 PSI	NITROUS PRESS
3328	3428		4320	4428 4452					X		Х	^	0-2000 PSI 0-100 PSI	NITROUS PRESS OIL PRESS/Pk&Wrr
3327	3522	2522	4327	4427				2634		Х			0-100 PSI	OIL PRESS
3321 3323	3421	2421	4321 4323	4421	4621	4521 4523	4221 4223	2604	X			X	0-100 PSI 0-150psi	OIL PRESS
3322	3422	2422	4322	4422	4622	7323	TLLJ	2605	X			X	0-200 PSI	OIL PRESS
3327-M	2 (2) 1		4327-M	44011			7			Х			0-7 Bars	OIL PRESS
	3421-]		3322-	4421-]					X			X	0-7Kg/Cm2 0-14 Kg/Cm2	OIL PRESS
3347	3542	2542	4347					2638		Х			100-250°F	OIL TEMP
3341	3441/3	2441	4340 4341	4440 4441	4641	4541	4241	2609	X		Х	v	100-340°F 140-280°F	OIL TEMP/Pk&Wrr
3348	3543	2543	4348	4447	4041	4541	4241	2639	Х	Х		X	140-280°F	OIL TEMP
3346			4346						Χ			Х	140-340°F	OIL TEMP
334I-M	3542-M								Y	Х		Х	40-l 20°C 60-l 40°C	OIL TEMP
3348-M	3543-M		4348-M				4		Α	Х		^	60-170°C	OIL TEMP
			4424						X			X	0-300 PSI	PRESSURE
			4424						X			X	0-400 PSI 0-600 PSI	PRESSURE PRESSURE
3349			4359									<u> </u>	DIG. GEAR POS PLUS INDICAROR	PRNDL +
3344	3544		4344	4444				2654	Х		X		0-1600°F	PYROMETER KIT
			4345						Х		Х		0-2000°F	PYROMETER KIT
3344-M			4344-M	4435					X		X	X	0-900°C 140-340°F	PYROMETER KIT
									_^	X		L^	100-250°F	TRANSFER CASE TEMP
3357	3552	2552	4357	4457				2640		X			100-250°F	TRANS TEMP
3351	3451	2451	4351	4451				2615	X		X	X	100-250°F 140-280°F	TRANS TEMP
3384	3484	2484	4384	4484				2610	X			X	30 In. HG	VACUUM
						AFOL			Х		Х		30 In. HG	VACUUM
3391	3592	2592	4391 4383	4491 4483		4591		2645	Х	Х	X		8-18 Volts 8-18 Volts	VOLTMETER VOLTMTR/Pk&Wrr
			2362					. Street and a	Α.	Х	Ĺ		10-16 Volts	VOLTMETER
_ T			4307	4407				2651	V	Х		v	16-36 Volts	VOLTMETER WATER PRESS
			4511/	1 4411/					Α.		1	I X	0-35psi	WATER PRESS
			4324	1107					Х			X	0-60psi	WATER PRESS

# GAUGE CHARTS (AROUND-THE-DIAL LIGHTING)

DESCRIPTION	RANGE	FULL	SHORT SWEEP	DSM	MECH	CARBON	FIBER	COBRA	GM	JEEP	PHANTO	M	PRO-COMP
.8		SWEEP	ELECTRIC	,		2-1/16"	2-5/8"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-5/8"
WATER TEMP	100-250°F		X			4737	4837		5837-00406/7	880241	5737	5837	5437
WATER TEMP/Pk&Wrn	100-260°F	X		Х					Ť				
WATER TEMP	60-210°F	X		Х									5469
WATER TEMP	120-240°F	X			Х	4732	4832		5832-00406/7		5732	5832	5432/3
WATER TEMP	140-280°F	X			X	4731	4831				5731	5831	5431
WATER TEMP	50-I 15°C	X			X								
WATER TEMP	60-I 40°C	X	14	1	X			201007	1				
WATER TEMP	40-I 20°C		Х								5737-M		

# **GAUGE CHARTS (LED LIGHTING & DIGITAL)**

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELEC	DSM	MECH		CHEVY BOWTIE	СОВ		COBALT DIGITAL	COPO CAMARO	ELITE	ES	FACTORY MATCH CHEVY	MATCH FORD	FM DODGE 3rd GEN	FM DODGE 4th GEN	FORD RACING	GS
						2-1/16"	2-1/16"	2-1/16"	2-5/8"	2-1/16"		2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"
A/F RATIO, Analog	8:I-I 8:I AFR	X		Х		7171		6171					5970						3870
A/F RATIO, Pro	6:1-18:1 AFR-Rich, 0-5v	X				7178		6178			- 8	5678	5978		8 8				3878
A/F RATIO, Pro Plus	8:I-I 8:I AFR	X						6197											$\square$
A/F RATIO NARROWBAND	Lean-Rich, 0-lv	X				7175	3675-00406	6175		3									
DUAL AIR TEMP.	0-300°F	Х		Х				6158											$\blacksquare$
AMP. AMMETER	0-250 Amps Digital	X						6390			- 4								
AMP. TEMP	0-250°F, Digital	X						6392					2/21						$\blacksquare$
BOOST CONTROLLER	30 IN.HG. 30 PSI	X				71/0		6181		9			2681						
BOOST PRESS	0-30 PSI	X		X		7160	*****	6160					F004	0004	0404			8	2004
BOOST PRESS	0-35 PSI	X		v	Х	7104	3604-00406	6104					5904	8304	8404				3804
BOOST PRESS	0-35 PSI	X		X		#1#A		/180		/070		=/==		0000	0.400				
BOOST PRESS	0-60 PSI	X		X	.,	7170		6170		6970		5670		8305	8405		0000	000101	
BOOST PRESS	0-60 PSI	X			X	7105	3605-00406	6105					5905				8508	880106	3805
BOOST PRESS	0-100 PSI	X		v	Х	7106		6106									8509		
BOOST PRESS	0-100 PSI	X		X	v	7107	2/07 00/0/	/107	7001	li s			F007				0507	50	2007
BOOST/VAC BOOST/VAC	30 In.HG./ 20 PSI 30 In.HG./ 30 PSI	X		Х	Х	7107	3607-00406 3657-00406	6107	7901	6959		5677	5907 5959				8507	000074	3807 3859
		X		X	v			6103		0757	3	50//						880074	3859
BOOST/VAC	30 In.HG./ 30 PSI	X			X	7103	3603-00406		7000		-		5903						3803
BOOST/VAC BOOST/VAC	30 In.HG./ 45 PSI	X			X	7108		6108 6103-M	7908	0 3	- 3		5903-M	8	2.	8		6	
BRAKE PRESS	60 cm/Hg-2 Bar 0-1600 PSI	X		Х	^			0103-11					ויו-כטעכ				-	880362	
CLOCK	ANALOG 12 HR			X		7185		6185			- 3		- 3					000302	
EXHAUST PRESS	0-60 PSI	X		٨	Х	/100		0100			-					8525			
EXHAUST PRESS		X			X														
EXHAUST PRESS	0-100 PSI 0-60 PSI	X		Х	_ ^_							-			_	8526 8592			-
EXHAUST PRESS	0-100 PSI	X		X												8595			
DIESEL RAIL PRESS	0-30,000 PSI	X		X				6186/6193						8386	-	8586/8593	8587/8584		
DPIC DPIC	-2G - +2G	X		^				6180						0300	1/	0300/0373	030//0304	880089	
DPSS, Lvl I	I STG SHIFT LITE	^				7187		6187	-								1	000007	-
DPSS, Lvl 2	5 STG SHIFT LITE					7188		6188											
DPSS, Lvl 3	5 Stg Shift-Lite Plybk					7100		0100							-				$\blacksquare$
FUEL LEVEL	0 E/90 F		Х			7113	3613-00406	6113	7914				5913						3813
FUEL LEVEL	240 E/33 F		X			7116	3013-00400	6116	7916				5916						3816
FUEL LEVEL	73 E/I 0 F		X			7115		6115	7915		- 8		5915					880075	3815
FUEL LEVEL	16 E/I 58 F		X			7118		6118	1713				3/13					000073	3013
FUEL LEVEL	Programmable	Х	^	Χ		7114		6114		6910		5609	5910		,			880400	3810
FUEL PRESS	0-I5 PSI	X		X		7162		6162	7961	0710		5667	37.10					880107	30.0
FUEL PRESS	0-15 PSI	X		,	Х	7102		0.02	7911			3007						000107	
FUEL PRESS	0-30 PSI	X		Х				6161	.,,,,					8360			8561		
FUEL PRESS	0-35 PSI	X		Х								5661							
FUEL PRESS	0-100 PSI	Х		Х		7163	3663-00406	6163	7963	6963		5671	5963				8564	880080	3863
HPOP PRESS	0-4000 PSI FORD	х		х											8496				3896
	PWRSTROKE														8490				
NITROUS PRESS	0-1600 PSI	X		Х		7174	3674-00406	6174	7974	6974			5974						3874
OIL PRESS	0-100 PSI	X		Х		7153	3653-00406	6153	7953			5652	5953					880085	3853
OIL PRESS	0-100 PSI		X			7127	3627-00406	6127	7927	6927			5927					880076	3827
OIL PRESS	0-100 PSI	X			Х	7121	3621-00406	6121	7921				5921						3821
OIL PRESS	0-120 PSI	X		Х															$\square$
OIL PRESS	0-7 Bars		X					6127-M					5927-M			3		L.	
OIL TEMP	100-300°F	X		Х															
OIL TEMP	100-340°F	X		Х								5640						8	
OIL TEMP	140-280°F	X			Х				7941										
OIL TEMP	140-280°F	X		X		7156		6156	7956				5956					880079	3856
OIL TEMP	140-300°F		X			7148		6148	7948	6948			5948						3848
PRNDL +	Digital Gear Position Indicator							6150											
PYROMETER KIT	0-1600°F	Х		Х		7144	3644-00406	6144				5646	5944	8344	8444		8546	880078	3844
PYROMETER KIT	0-2000°F	X		X		7145	6345-00406	6145		6945		3370	5945	8345	8445		8547	300010	3845
VIIETER KII	0.20001	, A		- 1		71-13	15 15 00 100	0110		07-13			37.13	0010	0110		1 0011		30 13

# (AROUND-THE-DIAL LIGHTING) GAUGE CHARTS

	PORT-COME	IP	TRADITIONAL CHROME	ULTRA-L	.ITE	UL LIQUID FILLED	ULTRA-NITE	UN LIQUID FILLED	Z-SERIES	FULL	SHORT SWEEP	DSM	MECH	RANGE	DESCRIPTION
2-1/	16" 2-5	5/8"	2-1/16"	2-1/16"	2-5/8"	2-5/8"	2-5/8"	2-5/8"	2-1/16"	SWEEP	ELECTRIC				
33	37   35	531	2532	4337	4437				2635		Х			100-250°F	WATER TEMP
				4354	4454					X		X		100-260°F	WATER TEMP/Pk&Wrn
90		569		4369	4469					X		X		60-210°F	WATER TEMP
333	2/3 343	32/3	2432/3	4332/3	4432/3	4632	4532		2607	X			X	120-240°F	WATER TEMP
33		431	2431	4331	4431	4631	4531/5	4231/5	2606	X			X	140-280°F	WATER TEMP
333										X			X	50-I I 5°C	WATER TEMP
		31-M			443 I-M					X			X	60-I 40°C	WATER TEMP
333	7-M			4337-M							χ			40-I 20°C	WATER TEMP

# (LED LIGHTING & DIGITAL) GAUGE CHARTS

GT	MOPA		NY	PHANTO		SPEK-PRO	SPORT-0		SPORT- COMP DIGITAL	SPORT- COMP II PRO CONTROL	ULTRA-I		ULTRA- LITE DIGITAL	FULL SWEEP	SHORT	DSM	MECH	RANGE	DESCRIPTION
2416"	24/16"	2-5/8"	2-1/16"	2416'	25/8"	24/16"	2-1/16"	25/8"	24/16"	24/16"	24/16"	25/8"	2-1/16"						
8070				7570		P238328	3670				4970			Х		X		8:I-18:I AFR	A/F RATIO, Analog
			7378	5778			3378				4378			Х				6:I-18:I AFR-Rich, 0-5v	A/F RATIO, Pro
														X				8:I-18:1 AFR	A/F RATIO, Pro Plus
8079			7375	7575			3675				4975			Х				Lean-Rich, 0-lv	NARROWBAND A/F RATIO
														Х		Х		0-300°F	DUAL AIR TEMP.
														Х				0-250 Amps Digital	AMP. AMMETER
														Х				0-250°F Digital	AMP. TEMP
				5782			3381				4381			Х				30 IN.HG. 30 PSI	BOOST CONTROLLER
	880020/34													Х		Х		0-30 PSI	BOOST PRESS
8004	880011/25		7304	7504			3604				4904			Х			Х	0-35 PSI	BOOST PRESS
						P303328								Х		Х		0-35 PSI	BOOST PRESS
8005					İ	P304328			6370				6570	Х		Х		0-60 PSI	BOOST PRESS
			7305	7505	i		3605				4905			Х			X	0-60 PSI	BOOST PRESS
			7306	7506			3606				4906			X	-		Х	0-100 PSI	BOOST PRESS
						P305328					.,,,,,			X		Х		0-100 PSI	BOOST PRESS
8001	880012/26		7307	7507	7801		3607	7601			4907	7701		X	ĵ		Х	30 In.HG/ 20 PSI	BOOST/VAC
8003			7359	7559	-	P302328	3659		6359	3677	4959		6559	Х		Х		30 In.HG/ 30 PSI	BOOST/VAC
			7303	7503			3603		4007		4903		4007	X	- 3		Х	30 In.HG/ 30 PSI	BOOST/VAC
			7306		7808			7608				7708		X			X	30 In.HG/ 45 PSI	BOOST/VAC
			1500		7000			7000				7700		X	- 3		X	60 cm/Hg-2 Bar	BOOST/VAC
														X		Х	_^_	0-1600 PSI	BRAKE PRESS
				7585			3685				4985			X		X		ANALOG 12 HR	CLOCK
				1202			5005				1705			X			Х	0-60 PSI	EXHAUST PRESS
														X			X	0-100 PSI	EXHAUST PRESS
														X		Х		0-60 PSI	EXHAUST PRESS
														X		X		0-100 PSI	EXHAUST PRESS
				7586/7593		P321328								X		X		0-30,000 PSI	DIESEL RAIL PRESS
				73007373		1321320								X		^		-2G - +2G	DPIC
			7387	5787			3387				4387			_ A				I STG SHIFT LITE	DPSS, Lvl I
			7388	5788			3388				4388				- 2			5 STG SHIFT LITE	DPSS, Lvl 2
			7300	3700			3389				4389					_		5 Stg Shift-Lite Plybk	DPSS, LvI 3
8014			7313	7513	7814		3613	7614			4913	7714			Х			0 E/90 F	FUEL LEVEL
8016			7316	7516	7816		3616	7616			4916	7716			X	_		240 E/33 F	FUEL LEVEL
8015			7315	7515	7815		3615	7615			4915	7715			X			73 E/10 F	FUEL LEVEL
0013			7318	7518	/013		3013	/013			4918	1113			X	_		16 E/I58 F	FUEL LEVEL
8010	880013/27		7310	7510		P312328	3610		6310		4910		6510	Х	^	Х			FUEL LEVEL
8010	880013/2/		7362	7561	7861		3661	7661	0310	3667	4910	7761	0510	X	-	X		Programmable 0-15 PSI	FUEL LEVEL
			1301	/301	7811	P315328	3001			3007	4701					^	v	0-15 PSI	FUEL PRESS
		_			/011	D21/220		7611				7711		X		Х	X		
						P316328								X		X		030 PSI 035 PSI	FUEL PRESS
00/3			72/2	7563	7863	P314328	2//2	7663	/2/2	3671	40/2	7763	/5/2	X		X		0-100 PSI	FUEL PRESS FUEL PRESS
8063		_	7363	/503	/003	P314320	3663	/003	6363	30/1	4963	1103	6563			^			LOET LKE22
														X		X		0-4000 PSI FORD PWRSTROKE	HPOP PRESS
			7374	7574	7874	P320328	3674	7674	6374	3673	4974	7774	6574	х		х		0-1600 PSI	NITROUS PRESS
8053		880249	7353	7553	7853	1 320320	3653	7653	03/1	3652	4953	7753	0374	X		X		0-100 PSI	OIL PRESS
8027	880015/29	JUU27/	7327	7527	7827		3627	7627	6327	3032	4927	7727	6527	^	Х	^		0-100 PSI	OIL PRESS
8021	880014/28		7321	7521	7821		3621	7621	0327		4921	7721	0327	Х			Х	0-100 PSI	OIL PRESS
3021	000017/20		1321	7321	1021	P325328	3021	7021			7/21	7721		X		х	^	0-120 PSI	OIL PRESS
						1 323320								_	Х	^		0-7 Bars	OIL PRESS
						P322328								Х	^	Х		100-300°F	O IL TEMP
						1377379				3640				X		X		100-340°F	OIL TEMP
					7841			7641		3040		7741		X		^	Х	140-280°F	OIL TEMP
		880251	7356	7556	7856		3656	7656			4956	7756		X	- 20	X	_	140-280°F	OIL TEMP
		000721		2070000			110000000000000000000000000000000000000		4240		200000000000000000000000000000000000000		4540	^	v	٨		1204700000000000000000000000000000000000	
			7348	7548	7848		3648	7648	6348		4948	7748	6548		Х			140-300°F	OIL TEMP
											4359							Digital Gear	PRNDL +
8044	880017/31		7344	7544			3644			3646	4944			Х		Х		Position Indicator 0-1600°F	PYROMETER KIT
0044	00001//31		7345	7545		P310328			6345	3647	4944		6545	X		X		0-1000 F	PYROMETER KIT
			7343	/343		11310320	3043		0343	3047	4743		0343	Α .		Λ.		0-2000 F	LINOLIEUR KII

# GAUGE CHARTS (LED LIGHTING & DIGITAL)

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELEC	DSM	MECH	C2	CHEVY BOWTIE	СОВ	ALT	COBALT DIGITAL	COPO CAMARO	ELITE	ES	FACTORY MATCH CHEVY	FACTORY MATCH FORD	FM DODGE 3rd GEN	FM DODGE 4th GEN	FOR D RACING	GS
						2-1/16"	2-1/1 6"	2-1/16"	2-5/8"	2-1/16"		2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"
PYROMETER KIT	0-900°C	X		X				6144-M					5944-M						
TRANS TEMP	100-250°F		X			7149	3649-00406	6149	7957	6949			5949	8349	8449	Ű.	8550		3849
TRANS TEMP	100-300°F	Х		X															
TRANS TEMP	100-260°F	Х		X		7157	3657-00406	6157				5658	5957	8357	8457	Ĭ.	8558	880314	3857
VACUUM	30 In. HG	X			Х				7984										
VOLTMETER	0-16 Volts	Х		X												1			
VOLTMETER	8-18 Volts		X			7192	3692-00406	6192	7991	6993			5992					180088	3892
VOLTMETER	8-18 Volts	Х		X		7191		6191				5683	5991						3891
VOLTMETER	8-19 Volts, Digital							6391											
WATER PRESS	0-100 PSI	Х		X								5668				1			
WATER PRESS	0-I 20 PSI	X		X															
WATER PRESS	0-35 PSI	Х		X												1			
WATER TEMP	100-250°F		X			7137		6137	7937	6937			5937					880077	3837
WATER TEMP	100-260°F	X		X		7155	3655-00406	6155	7955			5654	5955			j		880086	3855
WATER TEMP	120-240°F	X			Х	7132	3632-00406	6132	7932				5932			,	6		3832
WATER TEMP	140-280°F	Х			X	7131		6131	7931				5931						3831
WATER TEMP		Х		X															
WATER TEMP	100-340°F	X		X								5655							

# STREET ROD SERIES CHART

5 PIECE K	(ITS	ELEC	MECH		AMERICAN Platinum	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAG	E CRUISER	CRUISER AD	DESIGNER BLACK	DESIGNER BLACK II	FORD MP SILVER	OLDIES GOLDEN	OLD TYME WHITE	OLD TYME WHITE II	OLD TYME Black	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	
3-I/8" I 20 MPH PROGRAMMABLE SP W/ LCD ODOMETER & 2-I/16" G		Х			1902 GAUGI		1302 °-250°	F WATER 1	TEMP, 0-	100 PSI	1421 OIL PRES	SS, 240	ΩE	1502 - 33 Ω	1602 FUEL I	EVEL, A	1709 AND 8-18	VOLTME	TER.	
3-I/8" I 20 MPH MECHANICAL SPEE W/ WHEEL ODOMETER & 2-VI 6"			Х					1300-00408 F WATER 1	1	IOO PSI	1420 OIL PRES	SS, 240	ΩΕ	1501 - 33 Ω		EVEL, A	1708 ND 8-18 \	/OLTMET	ER.	
3-1/8" I 20 MPH PROGRAMMABLE SP W WHEEL ODOMETER & 2-1/16" MECHCANICAL & ELECTRIC	k		2-I/I	6" GAUGES	S: FULL	1811 SWEEP		1302-00408 <b>0° F WATE</b> I	R TEMP, I	FULL SWI	1411 EP 0-100	PSI OIL	880087 PRESS	, <b>240</b> Ω	1611 E - 33	Ω <b>FUEL</b>	LEVEL, AI	ND 8-18 V	/OLTMET	TER
3-1/8" 160 MPH PROGRAMMABLE SP W/ LCD ODOMETER & 2-1/16" (		х		1202	GAUG	ES: 100	)°-250°	F WATER	TEMP, 0-	100 PSI	OIL PRES	SS, 240	ΩΕ	- <b>33</b> Ω	FUEL L	EVEL, A	ND 8-18	VOLTMET	TER	
33/8" 120 MPH PROGRAMMABLE SF W/ LCD ODOMETER & 2-I/16" G		Х		2-1/1	6" GAU	JGES: I	 00°-250'	° F WATER		1100 -100 PSI		1201 S, 240	Ω <b>E</b> ·	· 33 Ω F	UEL LE		1740 D 8-18 VO	2010/10/00		2006
3-3/8" 120 MPH PRGRMMBL GPS SP W/ LCD ODOMETER & 2-1/16" G		Х		2-1/1	6" GAU	100000000000000000000000000000000000000	1350 00°-250'	° F WATER	TEMP, 0	-100 PSI	1450 OIL PRES	S, 240	ΩΕ.	· 33 Ω F	1650 UEL LE	VEL, AN	1749 D 8-18 VO	LTMETER		
33/8" 120 MPH PROGRAMMABLE SF W WHEEL ODOMETER & 2-VI 6"		Х		2-1/16"	GAUG		1340 °-250°	f water '	 Temp, 0-	  -   100 PSI	1440 OIL PRES	SS, 240	Ω <b>E</b>	- <b>33</b> Ω	1640 Fuel L	EVEL, A	ND 8-18			2007
3-1/8" 190 KPH PROGRAMMABLE SP LED ODOMETER & 2-VI 6" GA		X		2-1/16"	GAUG		1302-M   0° <b>-250</b> °	f water	 Temp, 0-	  -   100 PSI	01L PRES	SS, 240	Ω <b>E</b>		1602-M FUEL L		 ND 8-18	VOLTMET	 Ter	
TACH/	SIZE		RAN	GE	EL		MERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	DESIGNE BLACK	R DESIGNE BLACK		TYME IITE	OLD TYME White II	OLD T BLAC		PRESTIGE ACK DIAMON	PRES'	QUE	PRESTIGE PEARL
COMBO	3-3/8"	8000	RPM,	120 MPH	)	( T		1881	1381	1481		16	81		178	H				

TACH/ SPEEDO	SIZE	KANGE	ELEC	MUSCLE	BEIGE	WHITE	BLACK	BLACK II	WHITE	WHITE II	BLACK	BLACK DIAMOND	ANTIQUE IVORY	PEARL
COMBO	3-3/8"	8000 RPM, 120 MPH	Х		1881	1381	1481		1681		1781			
CCIVIDO	5"	8000 RPM, 120 MPH	Х	1295				1291		1290		2091	2090	2095

DUAL GAUGES	SIZE	DESCR	IPTION	RANGE		SHORT SWEEP	ARCTIC WHITE	DESIGNER BLACK	ANTIQUE BEIGE	OLD TYME WHITE
5.	3-3/8"	FUEL LEVEL	OIL PRESSURE	240 Ω EMPTY/33 Ω	0-100 PSI	Х	1313	1413	1813	1613
	3-3/8"	FUEL LEVEL	OIL PRESSURE	0 Ω EMPTY/90 Ω	0-100 PSI	Х	1324	1434	1824	1624
	3-3/8"	WATER TEMP.	VOLTMETER	100°-250° F	8-18 VOLTS	Х	1330	1430	1830	1630

		SI	<b>-</b>  E	目		ME	1	R	AN	ID	T	ACI	HO	M		ER					
SIZE	DESCRIPTION	RANGE	ELEC	MECH		AMERICAN PLATINUM	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	CRUISER	CRUISER AD	DESIGNER Black	DESIGNER BLACK II	FORD MP SILVER	GOLDEN OLDIES	OLD TYME WHITE	OLD TYME WHITE II	OLD TYME BLACK	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	
3-1/8"	SPEEDOMETER	120 MPH	Х			1988	1887	1388	1398-00408			1488			1588	1688		1787			
3-1/8"	SPEEDOMETER	120 MPH		X		1993	1896	1396				1496			1593	1693		1796			
3-3/8"	SPEEDOMETER	120 MPH	Х				1880	1380		1186	1187	1480	1286			1680	1287	1780	2086	2087	2084
3-3/8"	SPEEDOMETER	190 KMH METRIC	Х			2	1887-M	1388-M				1487-M				1688-M					
3-3/8"	GPS SPEEDOMETER	120 MPH	X				1849	1349			0	1449				1649		1749			
3-3/8"	SPEEDOMETER	120 MPH WHEEL ODO.	Х			,	1879	1379				1479				1679		1779	2088	2089	2085
3-3/8"	SPEEDOMETER	160 MPH	X		1288											3		- 5			
3-3/8"	SPEEDOMETER	260 KMH METRIC	X		1288-M																
5"	SPEEDOMETER	120 MPH	X				1889	1389				1489				1689		1789			
5"	SPEEDOMETER	160 MPH	Х		1289																
2-1/16"	TACHOMETER	7000 RPM	X			1994	1897	1397				1497				1694		1797			
3-1/8"	TACHOMETER	7000 RPM	X			1995	1898	1398	1398-00408			1498			1595	1695		1798			
3-3/8"	TACHOMETER	8000 RPM	X		1298		1890	1390		1196	1195	1490	1296			1690	1297	1790	2096	2097	2098
5"	TACHOMETER	8000 RPM	X		1299		1899	1399				1499				1699		1799			

# (LED LIGHTING & DIGITAL) GAUGE CHARTS

GT	MOPA	AR	NV	PHANT	OM II	SPEK-PRO	SPORT-0	OMP II	SPORT- COMP DIGITAL	SPORT- COMP II PRO CONTROL	ULTR A-	LITE II	ULTRA- LITE DIGITAL	FULL	SHORT SWEEP	DSM	MECH	RANGE	DESCRIPTION
24/16"	24/16"	2-5/8"	2-1/16"	2416"	25/8"	2-V16'	2-1/16"	2-5/8"	24/16"	2416'	2-1/16"	25/8"	2-1/16"						
														X		X		0-900°C	PYROMETER KIT
	880019/33		7349	7549	7857		3649	7657	6349		4949	7757	6549		X			100-250°F	TRANS TEMP
						P342328								X		Х		100-300°F	TRANS TEMP
		880359	7357	7557			3657			3658	4957			X		X		100-260°F	TRANS TEMP
					7884			7684				7784		X			Х	30 In. HG	VACUUM
						P344328								X		X		0-16 Volts	VOLTMETER
8092	880021/35	880252	7392	7592	7891		3692	7691	6393		4992	7791	6593		Х			8-18 Volts	VOLTMETER
8091				7591			3691			3683	4991			X		X		8-18 Volts	VOLTMETER
																		8-19 Volts, Digital	VOLTMETER
														X		X		0-100 PSI	WATER PRESS
						P345328								X		X		0-120 PSI	WATER PRESS
														X		X		0-35 PSI	WATER PRESS
8037	880016/30		7337	7537	7837		3657	7637	6337		4937	7737	6537		X	-		100-250°F	WATER TEMP
8055	880018/32	880250	7355	7555	7855		3655	7655		3654	4955	7755		X		X		100-260°F	WATER TEMP
8032			7332	7532	7832		3632	7632			4932	7732		Х			Х	120-240°F	WATER TEMP
8031			7331	7531	7831		3631	7631			4931	7731		X		2000	Х	140-280°F	WATER TEMP
														Х		Χ			WATER TEMP
														X		Χ		100-340°F	WATER TEMP

TACH/SPEEDO COMBO I	SILE	NAP		CODALI DIGITAL	JI OKI-COM DIGITAL	OLINA-LITE DIGITAL
TACH/SPEEDU CUIVIBU	3-3/8"	IOK RPM	260 MPH	6987	6387	6587

MINI MONSTER				BOWTIE	DIGITAL						П	DIGITAL	COMP II	ULTRA-LITE II	ULTRA-LITE Digital
TACHOMETERS	3-3/4"	IOK RPM	6290	3699-00406	6999	7290	5690	5990	3890	7390	7590	6399	3690	4990	6599

# STREET ROD SERIES CHART

QU	AD GAUGE KITS	ELEC	AMERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	DESIGNER BLACK	DESIGNER BLACK II	OLD TYME BLACK	OLD TYME WHITE	OLD TYME WHITE II	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
3-3/8"	QUAD GAUGE & ELECTRIC PROGRAMMABLE SPEEDO	X	1202	1800	1308		1408		1700	1600	Ž.			
5"	QUAD GAUGE & ELECTRIC PROGRAMMABLE SPEEDO	X		1803	1303	1303-00408	1403		1703	1603				
3-3/8"	QUAD GAUGE & TACH/SPEEDO COMBO	X		1820	1309		1409		1720	1620				
5"	QUAD GAUGE & TACH/SPEEDO COMBO	X						1204			1203	2005	2090	2008

QUAD GAUGES	SIZE 3-3/8"	SIZE 5"	AMERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	DESIGNER BLACK	DESIGNER BLACK II	OLD TYME WHITE	OLD TYME WHITE II	OLD TYME BLACK	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 $\Omega$ E - 33 $\Omega$ F FUEL LEYEL	Х			1812	1312	1412		1612		1713			
		Х	1212	1810	1310	1410	1211	1610	1210	1710	2011	2010	2019
QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250°	Х			1814	1314	1414		1614		1714			
F WATER TEMPERATURE, 8-18 VOLTMETER, 0 $\Omega$ E - 90 $\Omega$ F FUEL LEVEL		Х	1225	1819	1319	1419	1224	1619	1213	1719	2012	2009	2020

G	AUG	SES	FULL	SHORT SWEEP	DSM	MECH	AM Muscle	AMERICAN Platinum	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	CRUSER	CRUISER AD	DESIGNER BLACK	DESIGNER Black II	GOLDEN OLDIES	g	OLD TYME WHITE	OLD TYME WHITE II	OLD TYME BLACK	MASTER PIECE	PRESTIGE BLACK	PRESTIGE ANTIQUE	PRESTIGE PEARL
SIZE	DESCRIPTION	RANGE		ELEC																	SILVER	DIAMOND	IVORY	
2-1/16"	AIR/FUEL											8 8					8079							
2-1/16"	BOOST/VAC	30 In.Hg-Vad15 PSI	X			X				1372				1472										
2-1/16"	BOOST/VAC	30 In.Hg-Vac/15 PSI	X		X		1258																	
2-1/16"	BOOST/VAC	30 In.Hg-Vac/30 PSI	X		X		1259							// N										
2-1/16"	CLOCK	ANALOG 12 HR					1284	1986	1885	1385		1185	1184	1485		1586		1686		1785				
2-1/16"	FUEL LEVEL PRGRMBLE	0 EMPTY/280 FULL	X		X		1209					1109	1108								880351			
2-1/16"	FUEL LEVEL	0 EMPTY/90 FULL		X			1214	1904	1815	1315		1113	1104	1415		1504		1604		1715		2014	2013	
2-1/16"	FUEL LEVEL	73 EMPTY/10 FULL		X			1215	1905	1816			1115	1105	1416		1505		1605		1716				
2-1/16"	FUEL LEVEL	240 EMPTY/33 FULL		X			1217	1906				1117	1107	1417	1206	1506		1606	1216	1717		2016	2017	2015
2-1/16"	FUEL LEVEL	0 EMPTY/30 FULL		X		-		1907	1818	1318				1418		1507		1607	3	1718				
2-1/16"	FUEL LEVEL	16 EMPTY/158 FULL		X			1218						S /											
2-1/16"	OIL PRESSURE	0-100 PSI		X			1226	1928	1827	1327	1327-00408			1427	1228	1528		1628	1227	1727	880352	2028	2027	2026
2-1/16"	OIL PRESSURE	0-100 PSI	X		X		1253					1153	1152											
2-1/16"	OIL PRESSURE	0-100 PSI	X			X	1219		1821					1429				1632		1721		2022	2021	2023
2-1/16"	PRNDL +	DIG. GEAR POS			1				1860	1360		100		1460	1460			1360	1360	1460				
510.00	VALENTEER	INDICATOR			_		1204	1000	1001	1201	1201 00 100	1100	1101	1401	1202	1500		1/00	1000	1701	0000=4	2002	2002	2004
2-1/16"	VOLTMETER	8-18 VOLTS		X	ļ.,		1294	1992	1891	1391	1391-00408		1191	1491	1293	1592		1692	1292	1791	880354	2093	2092	2094
2-1/16"	VOLTMETER	8-18 AOFL2	X	V	X		1282	1000	1027	1227	1227 02 400	1183	1182	1437	1220	1530		1/20	1227	1727	000353	2020	2027	2020
2-1/16"	WATER TEMP	100°-250°F	V	X	l v		1236	1938	183/	133/	1337-00408		1136	1437	1238	1538		1638	1237	1/3/	880353	2038	2037	2039
2-1/16"	WATER TEMP	100°-260°F	X		X	. v	1255		1022	1222		1155	1154	1422				1/22		1722		2022	2022	2021
2-1/16"	WATER TEMP	120°-240°F	ΙX			X	1232		1832	1332				1432				1632		1733		2033	2032	2031

# DASH CONTROL



Auto Meter's remarkable DashControl™ utilizes your vehicle's factory display(s) to provide performance information without modification. Available for certain vehicles with a Driver Information Center (DIC), DashControl™ plugs into the OBDII port and enables you to monitor an extensive list of vehicle specific performance parameters. Customize the display pages to display performance data you want, where you want it in the vehicle. Because there is no modification to any of the vehicle's computer systems, it's 100% warranty friendly and reversible simply by unplugging the device. It's the easiest, most integrated solution for gauges yet, and takes only seconds to install.

DashControl™ offers customizable alerts as well. Water temp getting too hot or oil pressure dropping? DashControl™ can activate your factory warning chime and display an alert in the DIC at any value you set. Customization is incredibly easy using our intuitive configuration software. Multiple pages of real time data, such as horsepower, torque, 0-60 time, transmission temp, boost pressure, and intake temp. Better still, the system is expandable to add up to two additional analog inputs for parameters not monitored by your vehicle's computer systems.

- · Quick and easy plug and play application
- · Easy to use monitoring options controlled by vehicle's door lock switches
- Two optional 0-5 volt analog inputs for aditional aftermarket senders
- · OBDII compatible with select GM vehicles
- No modification of the vehicle's computer system, 100% warranty friendly
- · Customizable alerts using the vehicle's warning chime for any set value





Instrument Cluster




Pop Up Display



Console Display



DASH CONTROL	MODEL NUMBER
DASH CONTROL, CHEVROLET CORVETTE 2005-2013	DL1010U
DASH CONTROL, CHEVROLET CAMARO 2010-2015	DL1020U
DASHCONTROL, CHEVROLET CRUZE 2011-2015	DL1030U
DASHCONTROL, SILVERADO/SIERRA/TAHOE/SUBURBAN/YUKON 2007-2013 (GMT900), GAS	DL1040U
DASHCONTROL, TAHOE/SUBURBAN/YUKON/YUKON XL/ESCALADE 2007-2014, GAS	DL1040U
DASHCONTROL, SILVERADO/SIERRA DIESEL 2007.5-2014 (GMT900), DIESEL	DL1045U
DASHCONTROL, CHEVROLET COBALT 2005-2010	DL1050U
DASHCONTROL, PONTIAC SOLSTICE 2006-2010	DL1050U
DASHCONTROL, SATURN SKY 2007-2010	DL1050U
DASHCONTROL, CHEVROLET HHR 2006-2011	DL1050U
DASHCONTROL, CADILLAC CTS 2008-2014	DL1060U
DASHCONTROL, CADILLAC CTS-V 2008-2015	DL1060U
DASHCONTROL, SILVERAD O/SIERRA 2014-2016, GAS	DL1061U
DASHCONTROL, TAHOE/SUBURBAN/YUKON/YUKON XL/ESCALADE 2015-2016, GAS	DL1061U
DASHCONTROL, SILVERAD O/SIERRA 2015-2016, DIESEL	DL1065U
DASHCONTROL, CHEVROLET CORVETTE 2014-2016	DL1066U



#### FEATURING:

#### **High/Low Boost Modes**

Essentially two different, configurable boost settings that can be switched between with the push of a button. Perfect for the daily driver/weekend warrior, power can be called upon only when you need it striking the perfect balance between performance and efficiency.

#### Boost By RPM/Boost By Gear

Integrating Auto Meter's most advanced digital tachometer circuit, your boost curve can be tuned precisely at 500 RPM increments to minimize wheelspin and put more power to the ground. Taking it a step further, you can even custom tailor boost levels to individual transmission gears for the ultimate in control.

#### One Touch Gear Capture

Because our Boost Controller looks at not only engine speed, but also vehicle speed, you can instantly capture each gear with the push of a button. Simply drive normally in your chosen gear and hit the capture button. Our advanced algorithms determine your exact gear in real time based on the ratio of these two inputs.

#### Peak Recall

One touch recall of the highest boost pressure seen during a given time period.

#### Configurable Warnings w/ Overboost Protection

Easy to set parameters provide a full face warning if boost pressure moves beyond your settings. The warning doubles in speed if you pass it by 2 psi or more. The controller can also automatically return the system to wastegate spring pressure in the instance of overboost conditions, potentially averting catastrophic damage to your engine.

#### **Pro Control Output**

Using your boost measurements, the Auto Meter Boost Controller can automatically trigger external devices such as water/methanol, injection, intercooler sprayer, or nitrous solenoids at a given boost pressure level, either on the high or low end of the scale.

# Auto Meter MODE HILO SELECT Auto Meter MODE

Putting together the most advanced feature set ever seen in a Boost Controller, Auto Meter has redefined the category. Packaged in a familiar and easy to install 2 1/16" gauge housing, this cutting edge device offers some of the most powerful functions ever assembled for safely extracting the most performance possible from your forced induction application. Intuitive programming right through the gauge (no separate software or laptop is necessary) makes setup and use incredibly easy. Power is nothing without control.

#### **Pro Control Input**

Not only will the Auto Meter Boost Controller control external devices, it can also be controlled by external devices such as the Auto Meter Pro Plus Wideband. Any ground signal sent to the Pro Control input will immediately back boost levels down to wastegate spring pressure.

#### **Display**

Highly versatile, boost pressure can be read in inHG/PSI, cmHG/BAR or kPa. Real time barometric compensation can also be turned on of off to account for changes in altitude and environmental conditions.

#### **Data Logger Output**

It has traditionally been a huge challenge to log both vacuum and boost. Our revolutionary approach to measurement allows for simple, configurable scale logging of both in either PSIA (absolute) or PSIG (gauge display)

#### Tach/Speed Signal Diagnostic

As both signals are critical to extracting the most from your Boost Controller, both signals feature real time on board diagnostics to verify the presence of proper signals. Taking it one step further, if the signal is interrupted during operation, the gauge will provide a warning.

#### A Comprehensive Package

Everything from the gauge to the wiring harness and sensor to the electronic boost control solenoid is included in the package. There are no additional pieces necessary to purchase to install and take advantage of every function with most applications.

		DIGITAL STEPPER MOTOR	88 = DIGITAL GAUGE	
<b>BOOST CONTROLLER</b>	RANGE	21/16"	INFO	
COBALT	30 IN. HG/30 PSI	6181	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'	88
PHANTOM/PHANTOM II	30 IN. HG/30 PSI	5782	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'	(88)
SPORT-COMP/ SPORT-COMP II	30 IN. HG/30 PSI	3381	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'	88
ULTRA-LITE/ ULTRA-LITE II	30 IN. HG/30 PSI	4381	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'	88
Z-SERIES	30 IN. HG/30 PSI	2681	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'	88











FUEL PRESSURE

DIGITAL
STEPPER MOTOR

40 60

PUEL
PRESS

FUEL
PRESS


8564











RAM GEN 4 GAUGES		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES	RANGE	21/16"	21/16"	21/16"	INFO
BOOST	0-35 PSI	_	8507		35 PSI INCLUDES 10' NYLON TUBING, UNIVERSAL T-FITTING AND 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	_	8508	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	_	8509	_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
FUEL PRESSURE	0-30 PSI	8561	_	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
<b>FUEL PRESSURE</b>	0-100 PSI	8564	_	( <del></del>	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL RAIL PRESSURE*	0-30 PSI	8594	_	2 <del></del>	2007.5 & NEWER DODGE CUMMINS 6.7L*
PYROMETER/EGT	0-1,600°F	8546	_	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS.
PYROMETER/EGT	0-2,000°F	8547	<u></u> -	( ) <u></u>	INCLUDES PROBE & 10 OF IRENMOCOUPLE WIRE. PROBE INCLUDES MOLTIFLE MOUNTING OF HONS.
TRANSMISSION TEMP	100-250°F	_	_	8550	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8558	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS

\* Works with factory sensors/parameters







RAM GEN 3 C	GAUGES	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES	RANGE	21/16"	21/16"	21/16"	INFO
BOOST	0-35 PSI		8504	_	35 PSI INCLUDES 10' NYLON TUBING, UNIVERSAL T-FITTING AND 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	—	8505	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	_	8506	-	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
EXHAUST PRESSURE †	0-60 PSI	8592	8525	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 6' COPPER LINE.
EXHAUST PRESSURE †	0-100 PSI	8595	8526		MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS.  MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-30 PSI	8560	_	· -	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	8563		_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL RAIL PRESSURE *	0-30 PSI	8586	· ·		2003-2007.5 DODGE CUMMINS 5.9L
FUEL RAIL PRESSURE *	0-30 PSI	8593	_	_	2007.5 & NEWER DODGE CUMMINS 6.7L
PYROMETER/EGT	0-1,600°F	8544		_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS.
PYROMETER/EGT	0-2,000°F	8545	<u> </u>	<del>-</del>	INCLUDES FRUDE & ID OF IRENMODUCTE WIRE, PRODE INCLUDES MULTIFLE MOUNTING OFFICIALS.
TRANSMISSION TEMP	100-250°F	—	_	8549	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8557	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS

















FORD FACTORY MATCH GAUGES	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES RANGE	21/16"	21/16"	21/16"	INFO
BOOST 0-35 PS	_	8404	_	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST 0-60 PS	_	8405		60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
FUEL PRESSURE 0-100 PS	8463			INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
PYROMETER/EGT 0-1,600°F	8444	_	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
PYROMETER/EGT 0-2,000°F	8445	_	_	INCLUDES PROBE & 10 OF IRENNOCOUPLE WINE, PROBE INCLUDES MOLLIFLE MOUNTING OFFICINS. 1/6 NFT.
TRANSMISSION TEMP 100-250°F	_		8449	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP 100-260°F	8457	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
HPOP PRESSURE 0-4,000 PS	8496	_	_	1994 – 2007 7.3L & 6.0L FORD POWERSTROKE ENGINES ONLY *

<sup>\*</sup> Works with factory sensors/parameters







FUEL RAIL PRESSURE







TRANSMISSION TEMPERATURE







	GM FACTORY MATCH GAUGES		FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES RANGE		21/16"	2/16"	21/16"	INFO
BOOST	0-35 PSI	_	8304	_	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	_	8305	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
FUEL PRESSURE	0-30 PSI	8360	_	_	INCLUDES 1/8" NPT SENDER & 8' HARNESS
FUEL RAIL PRESSURE	0-30,000 PSI	8386	_	_	LB7 & LLY GM DURAMAX ENGINES ONLY *
PYROMETER/EGT	0-1,600°F	8344	_		INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
PYROMETER/EGT	0-2,000°F	8345	_	_	INCLUDES PRODE & ID OF IRENMOCOURLE WINE. PRODE INCLUDES MULTIPLE MOUNTING OF TONS. 1/6 NY 1.
TRANSMISSION TEMP	100-250°F	_	_	8349	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8357	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS

<sup>\*</sup> Works with factory sensors/parameters



#### PIT ROAD SPEED **TACHOMETER\***

# Tachometer

MINI-MONSTER<sup>TM</sup> TACHOMETER







BEZEL DARKENED TO SIMULATE NIGHTIME VIEW


# Speedometer & Gauges



#### 7 USER SELECTABLE ILLUMINATION COLORS\* WITH FULL FACE HIGH & LOW WARNING



<sup>\*</sup> Pit Road Speed Tachometer illuminates with white numbers and increments, and has green and red warning illumination.



# ELITE SERIES GAUGES WERE DEVELOPED WITH TOP RACING TEAMS & DRIVERS TO ACHIEVE THE ULTIMATE IN PRECISION, VISIBILITY, & FUNCTIONALITY

#### **NEXT GENERATION TECHNOLOGY FEATURES INCLUDE:**

- 7 USER SELECTABLE COLORS TO MATCH VISUAL PREFERENCES OF DRIVER AND VISIBILITY CONDITIONS (\*EXCEPT PIT ROAD TACHS).
- EXPANDED VIEWABLE AREA WHILE STILL MAINTAINING A COMPACT 2 1/16" SIZE.
- POWERED BY ADVANCED CIRCUIT DESIGNS FOR IMPROVED ELECTRICAL NOISE RESISTANCE & PRECISION.
- ELITE SERIES GAUGES FEATURE SOLID STATE, DATA ACQUISITION GRADE SENDING UNITS, DIGITAL STEPPER MOTOR MOVEMENTS. & BRIGHT WHITE "ALWAYS-ON" HI-DEF LED THROUGH THE DIAL ILLUMINATION.
- ENHANCED WITH PRO-CONTROL FUNCTIONALITY, THESE INSTRUMENTS ALLOW DRIVERS TO FOCUS ON THE COMPETITION WHILE THE GAUGES CONTROL KEY VEHICLE SYSTEMS & ALERT THE DRIVER TO WARNING CONDITIONS.
- STREAMLINE YOUR SETUP WITH BUILT-IN PRO-CONTROL CIRCUITS WITH CUSTOM PROGRAMMABLE ACTIVATION & DEACTIVATION POINTS FOR KEY FUNCTIONS LIKE LIGHTS, FANS, SWITCHES, & PUMPS.
- SET CUSTOM ALERT HIGH AND LOW POINTS SPECIFIC TO YOUR VEHICLE & RECEIVE FULL DIAL WARNING NOTIFICATION TO HIGHLIGHT THE NEED FOR DRIVER ATTENTION.
- ACQUIRE DATA FOR LATER REVIEW WITH ONE TOUCH PEAK RECALL FUNCTIONALITY.
- DATA LOGGER 0-5V OUTPUT PROVIDES ECU AND DATA SYSTEMS WITH VITAL INFO.

		DIGITAL STEPPER MOTOR	88 = DIGITAL GAUGE	
GAUGES	RANGE	21/16"	INFO	
AIR FUEL RATIO-WIDEBAND	(LEAN-RICH)	5678	PRO INCLUDES BOSCH 02 SENSOR & WIRING HARNESS "WIDEBAND DOES NOT CHANGE ILLUMINATION COLOR	
BOOST	0-60 PSI	5670	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	
BOOST	0-100 PSI	5606	INCLUDES 1/8" NPT SENDER AND 8" WIRING HARNESS	
BOOST/VACUUM*	30 IN. HG/30 PSI	5677*	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS	
FUEL LEVEL PROGRAMMABLE*	(0 Ω / 280 Ω)	5609*	FEATURES 7 PRE-SETS PLUS UNIVERSAL PROGRAMMABLE SETTING	
FUEL PRESSURE	0-15 PSI	5667	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	20
FUEL PRESSURE	0-35 PSI	5661	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	
FUEL PRESSURE	0-100 PSI	5671	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	20
OIL PRESSURE	0-100 PSI	5652	INCLUDES 1/8" NPT SENDER, 1/4" ADAPTER AND 8' WIRING HARNESS	
OIL TEMPERATURE	100°-340° F	5640	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS	
PYROMETER/EGT*	0°-1600° F	5646*	INCLUDES TYPE K THERMOCOUPLE AND WIRING HARNESS	
PYROMETER/EGT*	0°-2000° F	5645*	INCLUDES TYPE K THERMOCOUPLE AND WIRING HARNESS	20
TRANSMISSION TEMPERATURE	100°-260° F	5658	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS	
VOLTMETER	8-18 VOLTS	5683	INCLUDES 8' WIRING HARNESS	20
WATER PRESSURE	0-100 PSI	5668	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	
WATER TEMPERATURE	100°-260° F		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS	
WATER TEMPERATURE	100°-340° F	5655	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS	

\* No DATA AQUISITION OUTPUT

<b>TACHOME</b>	TER	OPERATES ON MOST 4, 6, AND 8 CY	LINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIO	NS	
SIZE	RANGE	DESCRIPTION	INFO	PART #	
3¾"	10,000 RPM	MINI-MONSTER™ PEDESTAL	FULL DIAL COLOR CHANGE FOR SHIFT LIGHT INDICATION. ALSO FEATURES PEAK RECALL	5690	
33/8"	10,000 RPM	IN-DASH/SHIFT-LIGHT	FULL DIAL COLOR CHANGE FOR SHIFT LIGHT INDICATION. ALSO FEATURES PEAK RECALL	5697	
33/8"	10,000 RPM	PIT ROAD SPEED PEDESTAL	IN-DASH MOUNTING INCLUDES PROGRAMMABLE LED PIT ROAD SPEED / PROGRESSIVE SHIFT	6606-05705	
5"	10,000 RPM	PIT ROAD SPEED PEDESTAL	LIGHT. REQUIRES PIC #9119 FOR OPERATION.	6847-05705	
5"	10,000 RPM	PIT ROAD SPEED PEDESTAL	IN-DASH MOUNTING INCLUDES PROGRAMMABLE LED PIT ROAD SPEED / PROGRESSIVE SHIFT LIGHT. REQUIRES PIC #9119 FOR OPERATION. HAS CANBUS CAPABILITY.	8199-05702	
5" x 2.8" x 1"		PIC	REQUIRED FOR (1 RPM RESOLUTION) PROGRAMMING OF PIT ROAD SPEED/SHIFT LIGHT FUNCTIONALITY OF THE 6606-05705, 6847-05705 & 8199-05702	9119	

#### **IN-DASH SPEEDOMETER**

SIZE	RANGE	DESCRIPTION	INFO	PART #
33/8"	160 MPH	IN-DASH	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	5688

# SPEK PRO



- 7 color user-selectable background illuminations (red, blue, green, white, yellow, orange, and violet) with adjustable brightness for day and night - with independent dimming of dial and pointer.
- Configurable "High" and "Low" warnings using three on-instrument-face buttons.
- Pro-Control output enables a 1.5 amp load to activate a relay and trigger your choice of warning lights, external buzzers, fans, pumps, or features such as water/meth nitrous injection.
- Features a peak recall function, which enables the user to review high gauge readings. The highest reading will be stored by the gauge until it is cleared.
- Includes patented light-weight, spin-on bracket and pre-wired harness for simplified installation.
- Patented Wide Angle dial design provides the largest viewable dial available in a 2-1/16" gauge.
- Precision 280° brushless stepper motor movement provides a quiet, fluid, and accurate pointer movement with superior dial resolution.

2001-2007

SILVERADO/SIERRA

BOOST 0-35 PSI.

PYROMETER 0-2000 F,

TRANSMISSION

TEMPERATURE

100-300° F

P73021



SPEK PRO MOUNTING	PILLAR	DIAL	A-PILLAR							
SOLUTIONS	COLOR	FACE	DUAL	DUAL w/speaker hole	TRIPLE	TRIPLE w/speaker hole				
DODGE RAM 98-02	BLACK	BLACK	P72000	P72001	P73000	P73001				
DODGE RAM 03-09	BEIGE	WHITE	P72002		P73002	_				
DODGE RAM 10-15	BEIGE	BLACK	P72003	— <sub>0</sub>	P73003	_				
FORD SUPER DUTY 99-07	BLACK	BLACK	P72010	_	P73010	_				
FORD SUPER DUTY 08-10	BLACK	SILVER	P72012		P73012	-				
FORD SUPER DUTY 08-10	BLACK	BLACK	P72011	-	P73011	-				
CHEVY SILVERADO/SIERRA 01-07	BLACK	BLACK	P72020		P73020	_				
CHEVY SILVERADO/SIERRA 01-07	BLACK	BLACK	P72021	_	P73021	_				

2010-2015

RAM

BOOST 0-60 PSI.

Pyrometer 0-2000 F

P72003





## Digital Stappar Motor













#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 2-12 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD,

		THE TELL CHANGE ELECTRONIC ICINTIONS	4	
RANGE	DESCRIPTION	INFO	21/16"	5"
8,000 RPM	MEMORY	10' WIRING HARNESS. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	P334328	P238328
11,000 RPM	MEMORY	10' WIRING HARNESS. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	P336328	P239328


#### IN-DASH SPEEDOMETERS

III-DAJII	JI ELDONIL I EKS		
RANGE	DESCRIPTION	INFO	5"
180 MPH	ELECTRIC (NO ODOMETER)	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	P230328

#### 21/16" DIGITAL STEPPER MOTOR

GAUGES	RANGE	BLACK FACE	WHITE FACE	INFO
BOOST	0-35 PSI	P303328	_	
BOOST	0-60 PSI	P304328	P304128	STAINLESS STEEL SENSOR 10' WIRING HARNESS, NEOPRENE
BOOST	0-100 PSI	P305328	_	TUBING, UNIVERSAL "T"
BOOST/VACUUM	30 IN. HG/30 PSI	P302328	P302128	50 STATE BY
FUEL LEVEL PROGRAMMABLE	(0 Ω/280 Ω)	P312328	P312128	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-15 PSI	P315328	P315128	
FUEL PRESSURE	0-30 PSI	P316328	P316128	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	P314328	P314128	
FUEL RAIL PRESSURE (DIESEL)	3-30K PSI	P321328	_	10' WIRING HARNESS CAN LEARN OEM SENSOR
NITROUS PRESSURE	0-1600 PSI	P320328	( <del></del>	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
OIL PRESSURE	0-120 PSI	P325328	P325128	STATIVLESS STEEL SENSON, TO WINING HARINESS
OIL TEMPERATURE	100°-300° F	P322328	P322128	TEMPERATURE SENSOR, 10' WIRING HARNESS
PYROMETER/EGT	0°-2000° F	P310328	P310128	TYPE "K" THERMOCOUPLE AND 10' WIRE HARNESS
TRANSMISSION TEMPERATURE	100°-300° F	P342328	-	TEMPERATURE SENSOR, 10' WIRING HARNESS
VOLTMETER	0-16 VOLTS	P344328	P344128	10' WIRING HARNESS
WATER PRESSURE	0-35 PS	P343328	_	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
WATER PRESSURE	0-120 PSI	P345328	-	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
WATER TEMPERATURE	100°-300° F	P346328	P346128	TEMPERATURE SENSOR, 10' WIRING HARNESS





IN-DASH TACHOMETER

# Tachometers





IN-DASH SPEEDOMETER/ ELECTRIC

# Speedometers





IN-DASH SPEEDOMETER/

8808

# Instruments

8092

Wideband Street Digital Stappar Motor Short Sweep Electric

VOLTMETER

Full Sweep
Wester
Temperature



OIL PRESSURE



2<sup>1</sup>/<sub>16</sub>) VOLTS

21/16) 19/WATER AND RESERVED TO SERVED TO SERV

8079





		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	■ = DIGITAL GAUGE
GAUGES	RANGE	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-WIDEBAND	(10:1-17:1AFR)	8079	4	_	STREET INCLUDES BOSCH 02 SENSOR. SEE TECH TIPS FOR MORE INFO
AIR FUEL RATIO-WIDEBAND	(8:1-18:1 AFR)	8070	· <u>—</u>	_	ANALOG INCLUDES BOSCH 02 SENSOR. PROGRAMMABLE RANGE. SEE TECH TIPS FOR MORE INFO
BOOST	0-35 PSI	_	8004	_	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI		8005	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	_	8001	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	-	8003	_	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
FUEL LEVEL PROGRAMMABLE	(0 Ω/280 Ω)	8010	_	:	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	_	2 <del></del>	8014	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (	73 Ω EMPTY/10 Ω FULL)	_	-	8015	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (2	40 Ω EMPTY/33 Ω FULL)	_	2—	8016	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-100 PSI	8063	-	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	8053	8021	8027	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 18" NPT SEVDER AND 8" WIRING HARNESS. Mechanical oil pressure gauges include 10" avlon tubing, 110" and 114" npt fittings. Short sweep electric oil pressure gauges include 110" npt sender and 14" npt fitting.
OIL TEMPERATURE	140°-300° F	_	<u> </u>	8048	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	8044	7 <u>—</u>	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT. WELD-IN FITTING & HOSE CLAMP METHODS.
TRANSMISSION TEMPERATU	URE 100°-250° F	_	-	8049	INCLUDES 1/6" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	8091		8092	5991 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	_	-	8037	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	8055	-	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE	120°-240° F	_	8032	_	INCLUDES 6' CAPILLARY TUBING & 1/2' NPT ADAPTER
WATER TEMPERATURE	140°-280° F	_	8031	_	INCLUDES & CAPILLANT TODING & 1/2 INTLADAPTER

**IN-DASH TACHOMETERS** 

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS


R	ANGE	DESCRIPTION	INFO	3¾"	5"
8,0	000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	8098	8097

**IN-DASH SPEEDOMETERS** 

RANGE	DESCRIPTION	INFO	33/8"	5"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	8089	8088









# Tachometers

IN-DASH TACHOMETER



IN-DASH SPEEDOMETER/ELECTRIC

Speedometers & Tachometers







# Instruments

Digital Stepper Motor

Stappar Short Swaap Itor Elactric

OIL PRESSURE




VOLTMETER

Full Sweep Wechanical Water



WATER TEMPERATURE







	8						* - 2 5/8" DIGITAL STEPPER MOTOR
		IGITAL		SWEEP		SWEEP	MODELS FEATURE PEAK RECALL AND LED WARNING LIGHT
	STEP	PER MOTOR	MECH.	ANICAL	ELEC	TRIC	(80) = DIGITAL GAUGE
GAUGES RAN	GE 2⅓	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
AIR FUEL RATIO-NARROWBAND (LEAN-	And in case of the last of the					_	WORKS WITH MOST FACTORY NARROW BAND 02 SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAM	BDA) 437	B —	I -	_	_	-	PRO INCLUDES BOSCH 42 02 SENSOR. SE WEBSITE FOR MORE INFORMATION (98)
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1	AFR) 497	0 —	_		_	_	ANALOG INCLUDES BOSCH 4.2 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET (10:1-17:1	AFR) 437	9 —		_	_		STREET INCLUDES BOSCH 4.2 02 SENSOR. SEEWEBSITE FOR MORE INFORMATION
B00ST 0-3	5 PSI —	_	4904	-	I -		35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST 0-6	PSI —	_	4905	_		_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
B00ST 0-10	PSI -	1 1-1	4906		-	_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER 30 IN. HG/3	<b>PSI</b> 438	1 —	_	33-	_	-	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8 WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOOST/VACUUM 30 IN. HG/2	PSI —		4907	7701	a-		DIGITAL CTERRED MOTOR ONLOTO INCLUDE MAR OFFICER T FITTING, AND ALLIARMENT
BOOST/VACUUM 30 IN. HG/3	PSI 495	9   —	4903	_	_	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS  MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
BOOST/VACUUM 30 IN. HG/4	5 PSI —	-	_	7708	-	_	MEGNANICAL BAUDES INCLUDE ID INTLUM TUDING AND UNIVERSAL I FITTING
CLOCK-ANALOG	498	5 —	_	_	_	_	12 HOUR. INCLUDES 8' WIRING HARNESS
D-PIC PERFORMANCE GAUGE	438	0   -	-	1	I	-	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSEPOWER
FUEL LEVEL PROGRAMMABLE (0Ω	(280 Ω) 491	0   -	_	<b>—</b>	_	_	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω	FULL) —		_	_	4913	7714	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω	FULL) —	-	_	_	4918	-	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω	FULL) —	-	-		4915	7715	WORKS WITH MOST PRE 1889 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω	FULL) —		_	<b>—</b> 20	4916	7716	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-1	5 <b>PSI</b> 496	1 7761*		7711		_	DIGITAL STEPPER MOTOR INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNES.
FUEL PRESSURE 0-10	D PSI 496	3 7763*	_	-		-	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP
NITROUS PRESSURE 0-160	<b>PSI</b> 497	4 7774*	_	, ::-::			AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
OIL PRESSURE 0-10	<b>PSI</b> 495	3 7753*	4921	7721	4927	7727	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 16" NPT SENDER AND 6" WIRING HARNESS.  MECHANICAL OIL PRESSURE GAUGES INCLUDE 10" NYLON TUBING, 18" AND 14" NPT FITTINGS.  SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 16" NPT SENDER AND 14" NPT FITTING.
OIL TEMPERATURE 140°-2	<b>80° F</b> 495	6 —	_	7741			DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8' NPT SENDER, 3/8' & 1/2' NPT FITTINGS & 8' HARNESS.
OIL TEMPERATURE 140°-3	00° F —	-	I -	_	4948	7748	MECHANICAL GAUGES INCLUDE 6' CAPILLARY TUBING & 1/2' NPT ADAPTER.
OIL TEMPERATURE 100°-3	40° F   -	7756*	I -	I -	I –	_	SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER.
PRNDL+ GEAR SHIFT INDICATOR GA	<b>UGE</b> 435	9 —	_	_	_		INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY. (98)
PYROMETER KIT 0°-16	00° F 494	4 —	_	1-	2-	1 -	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES
PYROMETER KIT 0°-20	00° F   494	5 —	_	_	_	_	MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
TRANSMISSION TEMPERATURE 100°-2	50° F -	-	_	- T	4949	7757	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 100°-2	<b>60° F</b> 495	7 —	_	2-	_	·-	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VACUUM 30 II	I. HG -		_	7784	-	_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
VOLTMETER 8-18 V	<b>DLTS</b> 499	1			4992	7791	DIGITAL STEPPER MOTOR GAUGE 4991 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE 100°-2	50° F —	· -	_	_	4937	7737	INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
WATER TEMPERATURE 100°-2	<b>60° F</b> 495	5 7755*	_			_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE 120°-2	40° F -		4932	7732	· ·		INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE 140°-2	80° F   —		4931	7731	_	_	INCLUDES O CAPILLANT TODING & 1/2 INFT ADAPTER

PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE

WITH MOST DOLLARS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	_	4999
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	4990	-

IN-DASH TACHOMETERS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	4997	4998

#### **IN-DASH SPEEDOMETERS**

	RANGE	DESCRIPTION	INFO	33/8"	5"
100	140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	4980	_
	160 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	_	4981
	160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	4988	4989
	160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	4993	_







# Tachometers


IN-DASH TACHOMETER



IN-DASH TACHOMETER 3697

IN-DASH SPEEDOMETER/ELECTRIC





Speedometers & Tachometers



# Instruments



Digital Stappar

Motor

Short Sweep Electric

VOLTMETER


VOLTS

3692

Full Sweep Mechanical WATER

TEMPERATURE 240 3631

**V**ACUUM 15 SPORT-COMP 10 5-7684





	DIGITAL MO		FULL S MECH		SHORT ELEC	TRIC	@ = DIGITAL GAUGE	
GAUGES RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)	3675	_	7-2	-	_	_	WORKS WITH MOST FACTORY NARROW BAND 02 SENSORS OR MODEL 2244.	
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)	3378	_	_	_	_	_	PRO INCLUDES BOSCH 42 02 SENSOR. SEEWEBSITE FOR MORE INFORMATION	(88)
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1AFR)	3670		_	·			ANALOG INCLUDES BOSCH 4.2 02 SENSOR. SEEWEBSITEFORMORE INFORMATION	
AIR FUEL RATIO-WIDEBAND STREET (10:1-17:1AFR)	3379	_	_	_	—8	_	STREET INCLUDES BOSCH 4.2 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION	(88)
BOOST 0-35 PSI	-	-	3604	2:		Ī	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING	
BOOST 0-60 PSI	_	_	3605	_	-	_	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS	
BOOST 0-100 PSI	_		3606	1		_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS	
BOOST CONTROLLER 30 IN. HG/30 PSI	3381	_	_	_	—	_	INCLUDES MAP SENSOR AND UNIVERSALT-FITTING AND 8' WIRING HARNESS' BOOST CONTROL SOLENOID'	(88)
BOOST/VACUUM 30 IN. HG/20 PSI	_		3607	7601	_			
BOOST/VACUUM 30 IN. HG/30 PSI	_	_	3603	-	—	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8" HARNESS	
BOOST/VACUUM w/peak&warning 30 IN. HG/30 PSI	3677		_	1-		_	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING	
BOOST/VACUUM 30 IN. HG/45 PSI	-	_	-	7608		_		
CLOCK-ANALOG	3685		_		_		12 HOUR. INCLUDES 8' WIRING HARNESS	
FUEL LEVEL PROGRAMMABLE (0 Ω EMPTY/280 Ω FULL)	3610	_	_	_	_	_	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING	
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	_			1-	3613	7614	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS	
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)	_	_	-	_	3618	_	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD	
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)		-			3615	7615	WORKS WITH MOST PRE-1989 (PRE '87 MUSTANG) FORD AND MOST CHRYSLER	
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)	_		_	_	3616	7616	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262	
FUEL PRESSURE 0-15 PSI	_	_	_	7611			REQUIRES #4 BRAIDED LINE AND MOUNTING CUP. MUST BE MOUNTED OUTSIDE THE VEHICLE.	
FUEL PRESSURE w/peak&warning 0-15 PSI	3667	7661	-	_		_		
FUEL PRESSURE w/peak&warning 0-100 PSI	3671	7663	_		_		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	
NITROUS PRESSURE w/peak&warning 0-1600 PSI	3673	7674	_	_	-	_	NATIONAL OUR DEPONIES AND SELECT MAINTENANCE OF AND SERVICE STATE OF THE SERVICE	
OIL PRESSURE 0-100 PSI	_		3621	7621	3627	7627	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.	
OIL PRESSURE w/peak&warning 0-100 PSI	3652	7653	_	_	_	_	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER, 8' WIRING HARNESS, & 1/8" to 1/4" NPT ADAPTER FITTING.	
OIL TEMPERATURE w/peak&warning 140°-280° F	3640	_					DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER. 3/8" & 1/2" NPT FITTINGS & 8" HARNESS.	
OIL TEMPERATURE 140°-300° F	-	_	_	_	3648	7648	MECHANICAL GAUGES INCLUDE 6' CAPILLARY TUBING & 1/2' NPT ADAPTER.	
OIL TEMPERATURE 140°-340° F		7656					SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8' NPT SENDER. 3/8' & 1/2' NPT ADAPTER.	
OIL TEMPERATURE 140°-280° F		_	_	7641	—	_		
PRNDL+ GEAR SHIFT INDICATOR GAUGE	3359	_				_	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.	(88)
PYROMETER KIT w/peak&warning 0°-1600° F	3646	_			—)	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE	
PYROMETER KIT w/peak&warning 0°-2000° F	3647	_		_		7057	MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.	
TRANSMISSION TEMPERATURE 100°-250° F		_	_	_	3649	7657	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.	
TRANS TEMP w/peak&warning 100°-260° F VACUUM 30 IN. HG	3658	_		7004			INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING	
VOLTMETER 8-18 VOLTS	_			7684	3692	7691	INCTONES IN INTENIA LORING WAN AMALAMATER SAT I-LILLING	
VOLTMETER w/peak&warning 8-18 VOLTS	3683	_	_	_	3032	7031	DIGITAL STEPPER MOTOR GAUGE 3683 INCLUDES 8' WIRING HARNESS	
WATER TEMPERATURE 100°-250° F	3003			_	3637	7637	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.	
WATER TEMPERATURE w/geak&warning 100°-260° F	3654	7655	_		3037	7037	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS	
WATER TEMPERATURE 120°-240° F	3034	7000	3632	7632				
WATER TEMPERATURE 140°-280° F	_	_	3631	7631	_		INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER	

PEDESTAL MOUNT TACHOMETER
THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	_	3699
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	3690	-

#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	3697	3698

#### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	33/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS	3680	7-
160 MPH	GPS	COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.		3681
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3688	3689
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	3693	2-2





#### SHIFT-LITE TACHOMETER

# Tachometers

IN-DASH TACHOMETER







IN-DASH SPEEDOMETER/ELECTRIC

Speedometers & Tachometers







# Instruments

Digital Stepper Motor

Short Sweep Electric

VOLTMETER

Full Sweep
Water
Temperature







TEMPERATURE

200
180
230
140
Auto Meter
25/8
WATER
7832

WATER





AIR FUEL RATIO—MORE NAME   1755				STEPPER TOR	FULL S MECHA		SHORT ELEC		® = DIGITAL GAUGE
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA) 5778 — — PRO INCLIDES BISCH 42 02 SENSOR. SEL WESTERRINGE INFORMATION AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1AFR) 7570 — — ANALOG INCLIDES BISCH 42 02 SENSOR. SEL WESTERRINGE INFORMATION — ANALOG INCLIDES BISCH 42 02 SENSOR. SELVESSTERRINGE INFORMATION — ANALOG INCLIDES BISCH 42 02 SENSOR. SELVESSTERRINGE INFORMATION — STEP INCLIDES BISCH 42 02 SENSOR. SELVESSTERRINGE INFORMATION — STEP INCLIDES BISCH 42 02 SENSOR. SELVESSTERRINGE INFORMATION — STEP INCLIDES BISCH 42 02 SENSOR. SELVESSTERRINGE INFORMATION — STEP INCLIDES BIS I	GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
ART FUEL RATIO-WIDEBAND ANALOG (R1-18:1AFR)   7570	AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	7575	_	_			_	WORKS WITH MOST FACTORY NARROW BAND 02 SENSORS OR MODEL 2244
ART FUEL RATIO-WIDEBAND ANALOG (R1-18:1AFR)   7570				_	-	-	_	_	
ART PUEL RATIO-WIDEBAND STREET (10:1-17:1 AFR)   5779						_	_	_	
BOOST   0-50 PSI     7505       60 PSI INCLUDES 10 YAYLON TUBING, 1/8" AND 1/4" NPT FITTINGS BOOST CONTROLLER   30 IN. HG/20 PSI	AIR FUEL RATIO-WIDEBAND STREET (10	0:1-17:1 AFR)		_	_		_	_	
BOOST	BOOST	0-35 PSI	_		7504	_	_	_	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST CONTROLLER   30 IN. HG/30 PSI   5782	BOOST	0-60 PSI	_		7505	_	_	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BODST/VACUUM   30 IN. HG/20 PSI   7559   7503	BOOST	0-100 PSI	_	_	7506	2		-	INCLUDES 10' NYLON TUBING , 1/8' AND 1/4" NPT FITTINGS
BOOST/VACUUM   30 IN. HG/30 PSI   7559   7503   —		N. HG/30 PSI	5782	_	_	_	_	_	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOUST/VACUUM   30 IN. HG/30 PSI   7599   7503	BOOST/VACUUM 30 II	N. HG/20 PSI	-	<del></del>	7507	7801		_	DIGITAL STEDDED MOTOR CALIFES INCLUDE MAD SENSOR TEITTING AND STUADNESS
CLOCK-ANALOG			7559	_	7503	_	_	_	
DIESEL FUEL RAIL PRESS   0-30,000 PSI   7586		N. HG/45 PSI		_	_	7808	_	_	
DIESEL FUEL RAIL PRESS   0-30,000 PSI   7593					_	_	_	_	
P-PIC PERFORMANCE GAUGE   5781					_	_	_	_	
FUEL LEVEL         10 Ω(280 Ω)         7510         —         —         FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING           FUEL LEVEL         (16 Ω EMPTY/19 Ω FULL)         —         —         7513         7814         WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS           FUEL LEVEL         (17 Ω EMPTY/19 Ω FULL)         —         —         —         7515         7815         WORKS WITH MOST 1968 1981 87 MUSTANG! RACTORY FORD AND MOST FACTORY CHRISLER, SHORER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.           FUEL LEVEL         (24 Ω EMPTY/19 Ω FULL)         —         —         —         7516         7816         WORKS WITH MOST 196 1989 1981 87 MUSTANG! RACTORY FORD AND MOST FACTORY CHRISLER, SHORER AND AND MOST FACTORY CHRISLER, SHORER AND AND AND TABLE ACTORY CHRISLER, SHORER AND AND AND TABLE AND T		0-30,000 PSI		-		-	_	_	2007.5 & Newer Dodge Cummins 6.7L & LBZ & LMM GM Duramax engines only *
FUEL LEVEL         (0 Ω EMPTY/90 Ω FULL)         —         7513         7814         WORKS WITH MOST 1985 TO 1997 CHEW/GM SENDERS           FUEL LEVEL         (16 Ω EMPTY/158 Ω FULL)         —         —         7518         —         WORKS WITH MOST 1989 (37 MUSTANG) AND LATER FORD           FUEL LEVEL         (73 Ω EMPTY/10 Ω FULL)         —         —         7515         7815         WORKS WITH MOST 1989 (37 MUSTANG) AND LATER FORD           FUEL LEVEL         (240 Ω EMPTY/33 Ω FULL)         —         —         —         7516         7816         WORKS WITH 20-33 OHM SENDERS, INCLIDING AUTO METER 2852           FUEL PRESSURE         0-15 PSI         —         7861*         —         7811         —         —         INCLUDES 1/8" NPT SENDER AND 8' WRING HARNESS           FUEL PRESSURE         0-100 PSI         7553         7863*         —         —         —         INCLUDES 1/8" NPT SENDER AND 8' WRING HARNESS           OIL PRESSURE         0-100 PSI         7553         7853*         7521         7821         7527         7827         MECHANICA QUI PESSURE GAUGES INCLIDE 18" NPT SENDER AND 8' WRING HARNESS           OIL TEMPERATURE         140°-280° F         7556         —         7841         —         —         DIGITAL STEPPER MUTGR GAUGES INCLIDE 18" NPT SENDER 38" 8' 12" NPT FITTINGS.           OIL						_	_	_	
FUEL LEVEL   (13 \( \) EMPTY/158 \( \) FUEL			7510	_		_			
FUEL LEVEL   (73 \( \) EMPTY/10 \( \) FULL					_	1000		7814	
FUEL LEVEL   (240 Q EMPTY/33 G FULL)	FUEL LEVEL (16 Ω EM	IPTY/158 Ω FULL)	-	_	_	_	7518	_	
FUEL PRESSURE   0-150 PSI   7563   7863*   7861*   7811	FUEL LEVEL (73 Ω EF	MPTY/10 Ω FULL)	_		-	_	7515	7815	
FUEL PRESSURE   0-100 PSI   7563   7863*		MPTY/33 Ω FULL)	_	_	_	-	7516	7816	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
NITROUS PRESSURE   0-1600 PSI   7574   7874	FUEL PRESSURE	0-15 PSI	_	7861*	-	7811	_		
OIL PRESSURE		0-100 PSI	7563			_	_		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE   O-100 PSI   7553   7853*   7521   7821   7527   7827   MECHANICA, DI PESSURE GAUGES INCLUDE IN YMON TIBING, INF AND JA* NPT FITTINGS.	NITROUS PRESSURE	0-1600 PSI	7574	7874*	_	1		.—.	
OIL TEMPERATURE	OIL PRESSURE	0-100 PSI	7553	7853*	7521	7821	7527	7827	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL TEMPERATURE         100°-340° F         —         7856°         —         —         SHORT SWEEP ELECTRIC GAUGES INCLUDE 18 MPT SENDER, 38° 8 1/7 MPT SENDER, 38°	OIL TEMPERATURE	140°-280° F	7556	_	_	7841		_	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS.
PRNDL+         GEAR SHIFT INDICATOR GAUGE         5759         —         —         INCLIDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.           PYROMETER KIT         0°-1600° F         7544         —         —         —         INCLIDES PROBE & 10′ OF THERMOCQUELE WIRE. PROBE INCLIDES MULTIPLE           PYROMETER KIT         0°-2000° F         7545         —         —         —         MOUNTING OPTIONS: 18° NPT.           TRANSMISSION TEMPERATURE         100°-250° F         —         —         —         7549         7857         INCLUDES 1/8° NPT SENDER, 3/8° AU 1/2° NPT FITTINGS.           TRANSMISSION TEMPERATURE         100°-260° F         7557         —         —         —         INCLUDES 1/8° NPT SENDER, 3/8° & 1/2° NPT ISTNINGS & 8' HARNESS           VACUUM         30 IN. HG         —         —         7884         —         INCLUDES 1/8° NPT SENDER, 3/8° & 1/2° NPT ISTNING AND UNIVERSAL TRITING           VOLTMETER         8-18 VOLTS         7591         —         7592         7891         7591 INCLUDE 8' WIRING HARNESS	OIL TEMPERATURE	140°-300° F	_	_	_	_	7548	7848	MECHANICAL GAUGES INCLUDE 6' CAPILLARY TUBING & 1/2" NPT ADAPTER.
PYROMETER KIT         0°-1600° F         7544         —         —         INCLIDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLIDES MULTIPLE MOUNTING OPTIONS. 18" NPT.           PYROMETER KIT         0°-2000° F         7545         —         —         —         MOUNTING OPTIONS. 18" NPT.           TRANSMISSION TEMPERATURE         100°-2500° F         —         —         —         7549         7857         INCLUDES 1/8" NPT SENDER, 38" AND 1/2" NPT FITTINGS.           TRANSMISSION TEMPERATURE         100°-260° F         —         —         —         INCLUDES 1/8" NPT SENDER, 38" AND 1/2" NPT FITTINGS.           VACUUM         30 IN. HG         —         —         7884         —         INCLUDES 10" YIJON TUBINGS AND UNIVERSAL TRITING           VOLTMETER         8-18 VOLTS         7591         —         7592         7891         7591 INCLUDE 8" WIRING HARNESS				7856*		2-2		_	
PYROMETER KIT         0°-2000° F         7545         —         —         MOLINTING CPTIONS: 18" NPT.           TRANSMISSION TEMPERATURE         100°-250° F         —         —         7549         7857         INCLUDES 1/8" NPT SENDER, 3/8" AVD 1/2" NPT FITTINGS.           TRANSMISSION TEMPERATURE         100°-260° F         —         —         INCLUDES 1/8" NPT SENDER, 3/8" AVD 1/2" NPT FITTINGS.           VACUUM         30 IN. HG         —         —         7884         —         INCLUDES 10" NYLON TUBING AND UNIVERSAL T HTING           VOLTMETER         8-18 VOLTS         7591         —         —         7592         7891         7591 INCLUDE 8 WIRING HARNESS				_	_	2-	_	_	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY. (8
TRANSMISSION TEMPERATURE         100°-250° F         —         —         7549         7857         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           TRANSMISSION TEMPERATURE         100°-260° F         7557         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS           VACUUM         30 IN. HG         —         —         7884         —         INCLUDES 10" NYLON TUBING AND UNIVERSAL TRITING           VOLTMETER         8-18 VOLTS         7591         —         —         7592         7891         7591 INCLUDE 8" WIRING HARNESS					_	_	_		INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE
TRANSMISSION TEMPERATURE         100°-260° F         7557         —         —         —         INCLUDES 1/8' NPT SENDER, 3/8' & 1/2' NPT FITTINGS & 8' HARNESS           VACUUM         30 IN. HG         —         —         7884         —         INCLUDES 10' NYLON TUBING AND UNIVERSAL TRITING           VOLTMETER         8-18 VOLTS         7591         —         —         7592         7891         7591 INCLUDE 8' WIRING HARNESS			7545	_	_	_	_	_	
VACUUM         30 IN. HG         —         —         7884         —         —         INCLUDES 10' NYLON TUBING AND UNIVERSAL TRITING           VOLTMETER         8-18 VOLTS         7591         —         —         7592         7891         7591 INCLUDE 8' WIRING HARNESS				1000	-	1000	7549	7857	
VOLTMETER         8-18 VOLTS         7591         —         —         7592         7891         7591 INCLUDE 8' WIRING HARNESS			7557	_	_	_	_	_	
						7884	_		
WATER TEMPERATURE 100°-250° E			7591	_					
	WATER TEMPERATURE	100°-250° F				1-	7537	7837	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
WATER TEMPERATURE         100°-260° F         7555         7855°         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS					100000000000000000000000000000000000000	_		_	INCLUDES 1/8" NPT SENDER, 3/8' & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE         120°-240° F         —         7532         7832         —         INCLUDES 6 CAPILLARY TUBING & I/Z' NPT ADAPTER			_	_			_	_	INCLUDES 6' CAPILLARY TURING & 1/2' NPT ADAPTER
WATER TEMPERATURE 140°-280° F — 7531 7831 — 1000000 0 CATILLANT TORING	WATER TEMPERATURE			_					AND THE RESIDENCE OF THE PROPERTY OF THE PROPE

\*2 5/8" Digital Stepper Motor Models Feature Peak Recall and LED Warning Light

#### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	_	7599
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7590	_

IN-DASH TACHOMETERS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS 5" **RANGE** DESCRIPTION INFO 33/8" 10,000 RPM IN-DASH FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS. 7597 7598

IN-DASI	H SPEEDOMETERS
RANGE	DESCRIPTION
140 MDU	CDC

RANGE	DESCRIPTION	INFO	33/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	7580	
160 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.		7581
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	7588	7589
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	7596	_

<sup>\*</sup> Works with factory sensors/parameters








The best selling and most revered series in the Auto Meter line to feature our award winning Hi-Def, Through-The-Dial LED lighting. With cool blue illumination and a race inspired design that is easy to read in all conditions, these gauges are equally at home in full blown race machines or one off custom builds. Way more than just a great looking gauge, the Cobalt line pioneered our Advanced Digital Stepper Motor Technology for the ultimate in no compromise accuracy, durability and safety. These are serious instruments for serious vehicles that just happen to look spectacular, particularly once the sun goes down.





#### SHIFT-LITE TACHOMETER

# Tachometers



IN-DASH SPEEDOMETER/ELECTRIC



# **Speedometers**












CALUCIES   RANDOW BAND   LEAR-NICH   LEA			DIGITAL STEPPER MOTOR		FULL SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		= DIGITAL GAUGE	
ARR FUEL RATIO-WADDEAND PRO (LEAN-RICH) 6178 —	GAUGES RAN	IGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO	ĺ
ARR FUEL RATIO-WIDEBAND PRO LAFALAMBOAN 6199 — — — — — — — — — — — — — — — — — —				_	_		_		WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244	
ARR FUER RATIO—WIDEBAND ANALOG. 181-181-1871				_	<u></u>	_	_	_		(88)
DUAL AIR TEMPERATURE	AIR FUEL RATIO-WIDEBAND PRO PLUS (AFR/LAM	BDA)	6197	_	_	_	_	_	PRO PLUS INCLUDES BOSCH 4.9 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION	(88)
AMPLIFIER TAMPETATURE				_	_	_	_	_		
AMPLIER TEMPERATURE 0-29° F 6392 — — — — — — — — — — — — — — — — — — —		$\overline{}$					_			(88)
BOOST   G-50 PSI   G-100   G-700   G-105   G-700				-		4	7 27			(RR)
BOOST					_		_			-
BOOST			—		6104					
BOOST CONTROLLER			6170	_		7905	_	_	DIGITAL STEPPER MOTOR GAUGE INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS	
BODST/VACUUM							100000			
BODST/VACUUM   20 IN. HG/20 PSI   5159	The state of the s			_	- 0100	_	_			(88)
BODST/VACUUM					6107	7901	_			-
CLOCK-ANALOG	BOOST/VACUUM 30 IN. HG/3	0 PSI	6159	_	6103		_	_		
CLOCK-ANALOG	BOOST/VACUUM 30 IN. HG/4	5 PSI			6108	7908	<u></u>	_		
DIESEL FUEL RAIL PRESSURE		BAR		_	6103-M	_	_	_		2
DIESTE FUEL RAIL PRESSURE		o DOI			1					
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2   6188				_	_	_	_			-
D-PIC PERFORMANCE GAUGE		UFSI								(BB)
D-PIC PERFORMANCE GAUGE					_	_	_	_		-
FUEL LEVEL (10 € EMPTY/80 € FULL) — 6113 7914 WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS FUEL LEVEL (13 € EMPTY/10 € FULL) — 6118 — 6118 WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS FUEL LEVEL (13 € EMPTY/10 € FULL) — 6115 7915 SOME SATING THE MOST 1968 (72 MINSTANG) AND LATER FORD CHEVY/GM SENDERS FUEL LEVEL (12 € EMPTY/70 € FULL) — 6116 7916 WORKS WITH MOST 1968 (72 MINSTANG) AND LATER FORD CHEVRERS SATING AND MINE WITH MOST 1968 (72 MINSTANG) AND LATER FORD CHEVRERS SATING AND MINE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS SATING AND MINE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS SATING AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS SATING AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS SATING AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS SATING AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS AND LATER FORD CHEVRERS AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS AND MORE WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS AND MORE SATING WITH MOST 1968 (73 MINSTANG) AND LATER FORD CHEVRERS AND MORE SATING AND MORE AND MORE SATING AND MORE			0.0000000000000000000000000000000000000	_	-	_	_			-
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL) —			6114	1 m	10-0	-		_	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING	
FUEL LEVEL   (73 Q EMPTY/10 Q FULL)		-	_			_		7914		
FUEL LEVEL   (200 EMPT/NO POLI)	FUEL LEVEL (16 Ω EMPTY/158 Ω	FULL)	_		_	_	6118			
FUEL PRESSURE  0-30 PSI 6161	FUEL LEVEL (73 Ω EMPTY/10 Ω	FULL)	-	-	-	_	6115	7915	WURKS WITH MUST PRE 1969 PRE 87 MUSTANG) FACTORY FURD AND MUST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.	
FUEL PRESSURE   0-30 PSI   6161		FULL)		10000	-	1000	6116	7916	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262	
FUEL PRESSURE   0-100 PSI   6174   7974*	And the second s	_		7961*	_	7911	_	_	DIGITAL STEPPER MOTOR INCLUDES 1/8" NPT SENDER AND	
NITROUS PRESSURE				7000*	_	_	_			
DIL PRESSURE   0-100 PSI   6153   7953*   6121   7921   6127   7927   7927					_	_	_	_		
OIL PRESSURE   0-7 BAR					0.000				DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.	-
DIL TEMPERATURE   140°-280° F   6156			0133	7333	0121	7321		1321	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.	
DIL TEMPERATURE   140°-300° F     6148       6148   -			6156			70/1	0127-101		SHUKI SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8 NPT SENDER AND 1/4 NPT FTTING.	
OIL TEMPERATURE			0130			7 341	G149 M		DIGITAL STEPPER MOTOR INCLUDE 1/8" NPT SENDER. 3/8" & 1/2" NPT FITTINGS & 8" HARNESS.	
OIL TEMPERATURE			175-176	-		_	100000000000000000000000000000000000000	5,000,00		
PRNDL+         GEAR SHIFT INDICATOR GAUGE         6150         —         —         INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.         (8)           PYROMETER         0°-900° C         6144-M         —         —         —         INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.         (8)           PYROMETER KIT         0°-1600° F         6144         —         —         —         INCLUDES PROBE & 10° OF THERMOCOUPLE WIRE PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.           PYROMETER KIT         0°-2000° F         6145         —         —         —         —         MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.           TRANSMISSION TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT HITTINGS & 8" HARNESS           VACUUM         30 IN. HG         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT HITTING           VOLTMETER         8-18 VOLTS         6191         —         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT HITTINGS.         (8)           VOLTMETER         8-19 VOLTS         6391         —         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.         (8) </th <th></th> <th></th> <th></th> <th>7050*</th> <th></th> <th></th> <th>0146</th> <th></th> <th>SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8 NPT SENDER, 3/8' &amp; 1/2' NPT ADAPTER.</th> <th></th>				7050*			0146		SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8 NPT SENDER, 3/8' & 1/2' NPT ADAPTER.	
PYROMETER         0°-900° C         6144-M         —         —         —         —         —         —         PYROMETER KIT         0°-1600° F         6144         —         —         —         INCLUDES PROBE & N° OF THERMOCOUPLE WIRE PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT. SENDER, 3/8" AND 1/2" NPT. FITTINGS.           TRANSMISSION TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT. SENDER, 3/8" AND 1/2" NPT. FITTINGS.         B' HARNESS           VACUUM         30 IN. HG         —         —         —         —         INCLUDES 1/8" NPT. SENDER, 3/8" & 1/2" NPT. HITTING           VOLTMETER         8-18 VOLTS         6191         —         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS         WIRING HARNESS           VOLTMETER         8-19 VOLTS         6391         —         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS         WE           WATER TEMPERATURE         40°-120° C         —         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.			0.000	/956*	1	, <del>,,,,</del> ,	_		INC. UPCO UNIVERSAL OCCUPED. FOR AUTOMATIO TRANSMISSION ONLY	(00)
PYROMETER KIT         0°-1600° F         6144         —         —         INCLUDES PROBE & N° OF THERMOCOUPLE WIRE PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.           PYROMETER KIT         0°-2000° F         6145         —         —         —         MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.           TRANSMISSION TEMPERATURE         100°-260° F         —         —         —         6149         7957         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           VACUUM         30 IN. HG         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT HITTING           VOLTMETER         8-18 VOLTS         6191         —         —         6192         7991         FULL SWEEP 6191 INCLUDES 8' WIRING HARNESS           VOLTMETER         8-19 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS         (88)           WATER TEMPERATURE         40°-120° C         —         —         —         6137 -M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.         (88)           WATER TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER           WATER TEMPERATURE         100°-260° F         6155         7955"			- 200 - 200 - 200	_	_	-	_	_	INCLUDES UNIVERSAL SENDER - FUR AUTUMATIC TRANSMISSION UNLY.	(99)
PYROMETER KIT  0°-2000° F  6145					_	_	_	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE PROBE INCLUDES MULTIPLE	
TRANSMISSION TEMPERATURE         100°-250° F         —         —         6149         7957         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           TRANSMISSION TEMPERATURE         100°-260° F         6157         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS           VACUUM         30 IN. HG         —         —         6192         7991         FULL SWEEP 6191 INCLUDES 8' WIRING HARNESS           VOLTMETER         8-18 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS           WATER TEMPERATURE         40°-120° C         —         —         6137-M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8'HARNESS           WATER TEMPERATURE         100°-260° F         6155         7955"         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8'HARNESS           WATER TEMPERATURE         100°-260° F         6155         7955"         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER				<del>-</del>		-	_	_		
TRANSMISSION TEMPERATURE         100°-260° F         6157         —         —         —         INCLUDES 1/8' NPT SENDER, 3/8' & 1/2' NPT FITTINGS & 8' HARNESS           VACUUM         30 IN. HG         —         7984         —         INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING           VOLTMETER         8-18 VOLTS         6191         —         —         6192         7991         FULL SWEEP 6191 INCLUDES 8' WIRING HARNESS           VOLTMETER         8-19 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS         689           WATER TEMPERATURE         40°-120° C         —         —         —         6137-M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8'HARNESS           WATER TEMPERATURE         100°-260° F         6155         7955"         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER           WATER TEMPERATURE         120°-240° F         —         —         6132         7932         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER			6145		1-	_		_		
VACUUM         30 IN. HG         —         7984         —         INCLUDES 10' NYLON TUBING AND UNIVERSALT-FITTING           VOLTMETER         8-18 VOLTS         6191         —         —         6192         7991         FULL SWEEP 6191 INCLUDES 8 WIRING HARNESS           VOLTMETER         8-19 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8 WIRING HARNESS         689           WATER TEMPERATURE         40°-120° C         —         —         —         6137-M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         100°-260° F         6155         7955"         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         120°-240° F         —         6132         7932         —         INCLUDES 6" CAPILLARY TUBING & 1/2" NPT ADAPTER			-	_		_	6149	7957		_
VOLTMETER         8-18 VOLTS         6191         —         —         6192         7991         FULL SWEEP 6191 INCLUDES 8' WIRING HARNESS           VOLTMETER         8-19 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS         (88)           WATER TEMPERATURE         40°-120° C         —         —         —         6137 -M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         100°-260° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         120°-240° F         —         —         —         INCLUDES 5" CAPILLARY TUBING & 1/2" NPT ADAPTER			6157		_	_	_	_		2
VOLTMETER         8-19 VOLTS         6391         —         —         —         DIGITAL LED DISPLAY INCLUDES 8 WIRING HARNESS         (88)           WATER TEMPERATURE         40°-120° C         —         —         —         6137-M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-250° F         —         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         100°-240° F         —         6132         7932         —         INCLUDES 5" CAPILLARY TUBING & 1/2" NPT ADAPTER	17.44.00					7984	_	_		=
WATER TEMPERATURE         40°-120° C         —         —         —         6137-M         —         INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-260° F         6155         7955**         —         —         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         120°-240° F         —         6132         7932         —         INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8"HARNESS		-		_	-	-	6192	7991		
WATER TEMPERATURE         100°-250° F         —         —         —         6137         7937         INCLUDES 1/8" NPT SENDER, 38" AND 1/2" NPT FITTINGS.           WATER TEMPERATURE         100°-260° F         6155         7955"         —         —         —         INCLUDES 1/8" NPT SENDER, 38" & 1/2" NPT FITTINGS & 8"HARNESS           WATER TEMPERATURE         120°-240° F         —         6132         7932         —         INCLUDES 6" CAPILLARY TUBING & 1/2" NPT ADAPTER	VOLTMETER 8-19 V	OLTS	6391	-	_	-	_	-	DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS	88
WATER TEMPERATURE         100°-250° F         —         —         —         6137         7937           WATER TEMPERATURE         100°-260° F         6155         7955° B         —         —         —         INCLUDES 1/8° NPT SENDER, 3/8° & 1/2° NPT FITTINGS & 8°HARNESS           WATER TEMPERATURE         120°-240° F         —         6132         7932         —         INCLUDES 6° CAPILLARY TUBING & 1/2° NPT ADAPTER	WATER TEMPERATURE 40°-1	20° C	-	101-01	10000	10-01	6137-M		INCLUDES 1/9" NOT SENDED 2/9" AND 1/2" NOT CITTINGS	
WATER TEMPERATURE 120°-240° F — 6132 7932 — INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER	WATER TEMPERATURE 100°-2	50° F	_	_	_	_	6137	7937	INCLUDES NO INFLISENDEN, SO AND IZ INFLITITIONS.	
WATER TEMPERATURE 120°-240° F — 6132 7932 — INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER	WATER TEMPERATURE 100°-2	60° F	6155	7955*	2		100		INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8'HARNESS	-
INCLUDES 6' CAPILLARY TUBING & 1/2' NPT ADAPTER	WATER TEMPERATURE 120°-2	40° F	_	_	6132	7932	_	_		
	WATER TEMPERATURE 140°-2	80° F	_		6131	7931	_	_	INCLUDES & CAPILLARY TUBING & 1/Z NPT ADAPTER	

 $<sup>{\</sup>color{red} * \textit{Works with factory sensors/parameters}}\\$ 





#### PEDESTAL MOUNT TACHOMETER

5° OPERATES ON MOST 2, 4, 6, AND 8 CYLINDER ENGINES & ARE COMPATIBLE WITH MOST POINTS, STANDARD,
AND ELECTRONIC IGNITIONS
MINI MONSTER - OPERATES ON MOST 1, 2, 3, 4, 6, 8, 10, AND 12 CYLINDER TACHOMETER SIGNALS

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LIGHT W/ BLUE LENS	I	6299
10,000 RPM	MINI-MONSTER™	INCLUDES EXTERNAL LED MINI QUICK LITE W/ AMBER LED	6290	_

#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING	6297	6298

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/	6280	_
160 MPH	GPS	HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	_	6281
160 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	6288	6289
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	6293	_









## **Tachometers**



3897

## Speedometers & Tachometers





## Instruments



PRO



Digital Stappar Motor

OIL PRESSURE



Short Sweep Electric

VOLTMETER



Full Sweep
Weeter
Temperature







	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	⊚ = DIGITAL GAUGE
GAUGES RANGE	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)	3878	· _ ·	200	PRO INCLUDES BOSCH 02 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (8:1-18:1AFR)	3870		_	ANALOG INCLUDES BOSCH 02 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
BOOST 0-35 PSI	_	3804	-	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST 0-60 PSI		3805	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM 30 IN. HG/20 PSI	_	3807	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM 30 IN. HG/30 PSI	3859	3803	_	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
DIESEL HPOP PRESSURE 0-4,000 PSI	3896	-	_	1994-07 FORD POWERSTROKE 7.3 & 6.0 L ENGINES *
FUEL LEVEL PROGRAMMABLE (0 Ω/280 Ω)	3810		<del></del> .	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	1. <del></del> -	s— s	3813	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (73 $\Omega$ EMPTY/10 $\Omega$ FULL)	_	_	3815	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)	-	, s—	3816	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-100 PSI	3863	_	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE 0-1600 PSI	3874	-	_	INCLUDES 1/6 NET SEINDEN AND 6 WINNING HANNESS
OIL PRESSURE 0-100 PSI	3853	3821	3827	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS.  MECHANICAL OIL PRESSURE GAUGES INCLUDE 10" NVLON TUBING, 1/8" AND 1/4" NPT FITTINGS.  SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE 140°-280° F	3856		_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
OIL TEMPERATURE 140°-300° F	_	1—1—1—1—1—1—1—1—1—1—1—1—1—1—1—1—1—1—1—	3848	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT 0°-1600° F	3844		_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS:
PYROMETER KIT 0°-2000° F	3845		_	1/8" NPT, WELD-IN FITTING & HOSE CLAMP METHODS.
TRANSMISSION TEMPERATURE 100°-250° F	-	::	3849	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 100°-260° F	3857	_	<del>-</del>	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
VOLTMETER 8-18 VOLTS	3891	8	3892	3891 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE 100°-250° F	_		3837	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE 100°-260° F	3855			INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE 120°-240° F	_	3832	_	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE 140°-280° F	I –	3831	_	INCLUDES O CAFILLANT TODING OF 1/2 INTT ADAPTICA

\* WORKS WITH FACTORY SENSORS/PARAMETERS

PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE

MITH MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE

RANGE DESCRIPTION		DESCRIPTION	INFO	33/4"	5"
	10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	_	3899
	10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	3890	-

#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	3897

IN-D	ASH	SPEED	OMETERS

RANGE	DESCRIPTION	INFO	33/8"	
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEED OMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3888	







# **Tachometers**



## Speedometers & Tachometers





## Instruments

Wideband PRO Digital Stepper Motor

OIL PRESSURE

Short Sweep Electric Full Sweep
Weekenical
Water
Temperature

WIDEBAND AIR/FUEL

2/16 BD 100 BD 1





5978





	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	= DIGITAL GAUGE
GAUGES RANGI	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA	) 5978	_	_	PRO INCLUDES BOSCH 02 SENSOR PROGRAMMABLE RANGE. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (8:1-18:1 AFF	) 5970	_	_	ANALOG INCLUDES BOSCH 02 SENSOR. RANGE. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
B00ST 0-35 PS	1 —	5904	5 <u></u>	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
B00ST 0-60 PS	1 —	5905	_	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER 30 IN. HG/30 PS	I 2681	-	-	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENO ID'
BOOST/VACUUM 30 IN. HG/20 PS	I –	5907	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM 30 IN. HG/30 PS	I 5959	5903	0_0	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
FUEL LEVEL PROGRAMMABLE (0 Ω/280 Ω)	5910	: <del></del> -	-	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 \Omega EMPTY/90 \Omega FUL	) —	-	5913	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (73 Ω EMPTY/10 Ω FUL	) —	_	5915	WORKS WITH MOST PRE 1889 [PRE '87 MUSTANG] FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFFERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FUL	.) —	_	5916	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-100 PS	I 5963	-	_	INCLUDED 4 (AP AIDT OFFIDED AND A MIDNIG HARMED
NITROUS PRESSURE 0-1600 PS	I 5974	_	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE 0-100 PS	I 5953	5921	5927	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 18" NPT SENDER AND 8" WIRING HARNESS. Mechanical oil pressure gauges include 10" nylon tubing, 178" and 14" npt fittings. Short sweep electric oil pressure gauges include 18" npt sender and 14" npt fitting.
OIL TEMPERATURE 140°-280°	F 5956	_		INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
OIL TEMPERATURE 140°-300°		_	5948	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT 0°-1600°		Ja <del></del>		INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS:
PYROMETER KIT 0°-2000°	0010	-	-	1/8" NPT, WELD-IN FITTING.
TRANSMISSION TEMPERATURE 100°-250°			5949	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 100°-260°		_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
VOLTMETER 8-18 VOLT		_	5992	5991 INCLUDES 8 WIRING HARNESS
WATER TEMPERATURE 100°-250°	27.50	_	5937	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE 100°-260°		_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE 120°-240°	F —	5932	_	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE 140°-280°	F —	5931	_	וועבטעבט שאיוו ווען אין ווען אין אין אין אין אין אין אין אין אין אי

PEDESTAL	MOLINIT	TACHON	CTED
PEUESIAI	MICHINI	LACHUN	

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

		WOOT FORTO, STANDARD, AND FERE OR WANGE ELECTRONIC IDINTIONS		
RANGE DESCRIPTION		INFO		5"
10,000 RPM SHIFT-LITE		INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS		5999
10.000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	5990	_

IN-D	HZA	TA	CHO	MET	FRS
114-1	$\sim$				LING

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	5997

IN-D	ASH	<b>SPEEDO</b>	METERS

	III-DASI	I SI ELDOITE I ENS		
	RANGE	DESCRIPTION	INFO	33/8"
160 MPH		IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	5988







IN-DASH SPEEDOMETER/ELECTRIC









## Instruments



**PRO** 

Digital Stepper nd Motor

OIL PRESSURE



Short Sweep Electric

VOLTMETER

10 12 14 16

10 1/ 1/ 18

21/16 VOLTS


7192

Full Sweep Wechanical Water

WATER TEMPERATURE



7178 **40** 





	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	⊚ = DIGITAL GAUGE
GAUGES RANGE	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)	7175	_		WORKS WITH MOST FACTORY NARROW BAND 02 SENSORS OR MODEL 2244. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)	7178		_	PRO INCLUDES BOSCH 02 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (8:1-18:1AFR)	7171			ANALOG INCLUDES BOSCH 02 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
B00ST 0-30 PSI B00ST 0-35 PSI	7160	7104		INCLUDES MAP SENSOR, UNIVERSAL T, AND 8' HARNESS INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
			_	MECHANICAL NCLUDES 10' NYLON TUBING AND ONIVERSAL I-FITTING MECHANICAL NCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST 0-60 PSI	7170	7105	_	DIGITAL STEPPER MOTOR GAUGES INCLUDES 1/8" NPT SENDER AND 8" WIRING HARNESS
BOOST 0-100 PSI	_	7106		INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM 30 IN. HG/20 PSI		7107	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM 30 IN. HG/30 PSI	7159	7103	_	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
BOOST/VACUUM 30 IN. HG/45 PSI		7108		
CLOCK-ANALOG	7185		_	12 HOUR. INCLUDES 8" WIRING HARNESS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1	7187	_	_	SINGLE SHIFT POINT BLUE LED & INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2	7188			4 STAGE SHIFT POINT, MULTI COLOR LED, AND LAUNCH LITE FEATURE
FUEL LEVEL PROGRAMMABLE (0 Ω/280 Ω)	7114	_		FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	_		7113	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)	-	-	7118	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 $\Omega$ EMPTY/10 $\Omega$ FULL)	_	_	7115	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		_	7116	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-15 PSI	7162	_	_	
FUEL PRESSURE 0-100 PSI	7163	_	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE 0-1600 PSI	7174	_	_	
OIL PRESSURE 0-100 PSI	7153	7121	7127	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 18" INFT SENDER AND 8" WRING HARNESS. Mechanical oil pressure gauges include 10" in/lon tubing, 178" and 14" inpt fittings. Short sweep electric oil pressure gauges include 18" inpt sender and 14" inpt fitting.
OIL TEMPERATURE 140°-280° F	7156	_	-	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
OIL TEMPERATURE 140°-300° F	_	_	7148	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT 0°-1600° F	7144	_	_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING
PYROMETER KIT 0°-2000° F	7145	_		OPTIONS: 1/8" NPT, WELD-IN FITTING & HOSE CLAMP METHODS.
TRANSMISSION TEMPERATURE 100°-250° F			7149	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 100°-260° F	7157	_		INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER 8-18 VOLTS	7191		7192	FULL SWEEP GAUGE 7191 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE 100°-250° F	7155	_	7137	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE 100°-260° F	7155	7100		INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE 120°-240° F	_	7132	_	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE 140°-280° F	_	7131	_	

#### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/BLUE LENS	_	7299
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7290	_

#### **IN-DASH TACHOMETERS**


OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	7297	7298*

\* 5" model cannot be cup mounted


22	IN-DASE	SPEEDOMETERS			
	RANGE	DESCRIPTION	INFO	33/8"	5"
	160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5299.	7288	7289
	160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.  SPEEDOMETER CABLE IS REQUIRED.	7293	-







IN-DASH SPEEDOMETER/ELECTRIC



## Speedometers & Tachometers





## Instruments







	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	■ DIGITAL GAUGE
GAUGES RANGE	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)	7375	_	_	WORKS WITH MOST FACTORY NARROW BAND 02 SENSORS OR MODEL 2244. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)	7378	_	_	PRO INCLUDES BOSCH 02 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
BOOST 0-35 PSI	_	7304		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING (35 PSI ONLY)
BOOST 0-60 PSI		7305	<del>_</del>	INCLUDES IN MILON TODING AND UNIVERSAL I-FITTING (33 F31 UNLT)
BOOST 0-100 PSI	_	7306	_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM 30 IN. HG/20 PSI	_	7307	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM 30 IN. HG/30 PSI	7359	7303	( <u></u>	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
BOOST/VACUUM 30 IN. HG/45 PSI	_	7308	_	WEST MITCHE GROSES INCESSED TO THE STATE OF
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1	7387	_		GREEN LED & INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2	7388		_	5 STAGE SHIFT POINT, MULTI COLOR LED, AND LAUNCH LIGHT FEATURE
FUEL LEVEL PROGRAMMABLE (0 Ω/280 Ω)	7310		_	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	_	_	7313	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)	_	_	7318	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)	<u> </u>	_	7315	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		_	7316	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-15 PSI	7362		_	
FUEL PRESSURE 0-100 PSI	7363	_	<del></del>	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE 0-1600 PSI	7374			10 to
OIL PRESSURE 0-100 PSI	7353	7321	7327	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS. Mechanical oil pressure gauges include 1/8" Nylon Tubing, 1,8" and 1/4" NPT Fittings. Short Sweep Electric oil pressure gauges include 1/8" NPT Sender and 1/4" NPT Fitting.
OIL TEMPERATURE 140°-280° F	7356	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
OIL TEMPERATURE 140°-300° F	_	_	7348	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT 0°-1600° F	7344		_	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE
PYROMETER KIT 0°-2000° F	7345			MOUNTING OPTIONS: 1/8" NPT.
TRANSMISSION TEMPERATURE 100°-250° F	_	_	7349	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 100°-260° F	7357	_	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
VOLTMETER 8-18 VOLTS	_	_	7392	
WATER TEMPERATURE 100°-250° F	_		7337	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE 100°-260° F	7355			INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
WATER TEMPERATURE 120°-240° F	_	7332	_	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE 140°-280° F	_	7331	_	INSCOULS & CALIFICATE TOURS OF 1/2 HET ADALTER

PEDESTAL MOUNT TACHOMETER THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	-	7499
10.000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7390	_

#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 4,6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPI	M IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	7497	7498

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"	5"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	7488	7489

# **ULTRA-LITE**





Born on the high speed ovals of NASCAR and refined in motorsport competition throughout the world, it's no surprise the Pro-Comp Ultra-Lite gauges have become the most popular series in the Auto Meter line. Lightweight and engineered to near bulletproof standards, the matte brushed aluminum dial and bezel look clean, polished and right at home in anything from the most hardcore track car to high tech street machines. The Ultra-Lite series also offers the most comprehensive selection of different gauge types, assuring a perfect fit in virtually any build. These instruments define what it means to be professional grade; more professional racers trust Ultra-Lites than any other gauge.

# **ULTRA-LITE**



#### SHIFT-LITE TACHOMETER

## Tachometers



IN-DASH SPEEDOMETER/ELECTRIC



## Speedometers

IN-DASH GPS SPEEDOMETER/

IN-DASH SPEEDOMETER/ MECHANICAL



## Instruments





Short Sweep Electric

TRANSMISSION TEMPERATURE



Full Sweep Wechanical Water




BOOST/VAC



# ULTRA-LITE\*



GAUGES AIR FUEL RATIO-NARROWBAND AIR FUEL RATIO-WIDEBAND PRO AIR FUEL RATIO-WIDEBAND PRO PLU AIR FUEL RATIO-WIDEBAND PRO PLU	RANGE	21/16"	25/II		THE RESERVOIR		The State of the S	
AIR FUEL RATIO-WIDEBAND PRO AIR FUEL RATIO-WIDEBAND PRO PLU			25/8"	21/16"	25/8"	21/16"	25/8"	INFO
AIR FUEL RATIO-WIDEBAND PRO PLU	(LEAN-RICH)	4375	_		_	_	_	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244 NO BACK LIGHTING
	(AFR/LAMBDA)	4378	1	_	_	-	_	PRO INCLUDES BOSCH 42 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
		4397	4470			_		PRO PLUS INCLUDES BOSCH 49 02 SENSOR. SEEWEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG AIR FUEL RATIO-WIDEBAND STREET	(8:1-18:1AFR) (10:1-17:1AFR)	4370 4379	4479	_				ANALOG INCLUDES BOSCH 4.2 02 SENSOR. SEEWEBSITE FOR MORE INFORMATION STREET INCLUDES BOSCH 4.2 02 SENSOR. SEEWEBSITE FOR MORE INFORMATION
AIR PRESSURE	0-150 PSI		_	4320		_	_	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTING
DUAL AIR TEMPERATURE BLOWER PRESSURE	0°-300° F	4358			4402			INCLUDES TWO 3/8" NPT SENDER & 8 WIRE HARNESS
BOOST	0-60 PSI 0-15 PSI	4350		4302	4402	_	=	INCLUDES 10' NYLON TUBING & 1,8" & 1,4" NPT FITTINGS
BOOST	0-35 PSI	_		4304	4404	_	_	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" to 1/4" NPT  ADAPTER FITTING.
BOOST BOOST	0-60 PSI 0-100 PSI	_	·	4305 4306		_		INCLUDES 10' NYLON TUBING & 1,6" & 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	4381		4300	=		=	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS BOOST CONTROL SOLENOID'
BOOST/VACUUM	30 IN. HG/20 PSI	_		4301	4401			
BOOST/VACUUM BOOST/VACUUM	30 IN. HG/30 PSI 30 IN. HG/45 PSI			4303	4403	_		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
	60 CM./HG-2.0 BAR		_	4308 4303- M				
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./15 PSI	4376	_	_	_	_	_	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING, 8' WIRING HARNESS, & 10 1/2'
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./30 PSI	4377	4477					NYLON TUBING
BRAKE PRESSURE BRAKE PRESSURE	0-1600 PSI 0-2000 PSI	_	4467	_	4426	_		INCLUDES 1,8" NPT SENDER AND 8' WIRING HARNESS INCL T-FITTING, 3/8" OD X 1/8"-27 NPT FITTING. USE ONLY APPROVED BRAKE LINES
CLOCK-ANALOG		_	_	_	_	4385	4485	12 HOUR. QUARTZ MOVEMENT WITH SECOND HAND
CYLINDER HEAD TEMP. DIESEL FUEL RAIL PRESSURE	140°-340° F 0-30,000 PSI	4386*		_	_	4336		INCLUDES 1/8" NPT SENDER 2003-2007.5 DODGE CUMMINS 5.9L & LB7 & LLY GM DURAMAX ENGINES ONLY*
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	4386 ^	_				=	2007.5 & NEWER DODGE CUMMINS 6.7L & LBZ & LLY GM DURAMAX ENGINES ONLY*
DIESEL HPOP PRESSURE	0-4,000 PSI	4396*	_	-		_	-	1994 – 2007 FORD POWERSTROKE 7.3L & 6.0L ENGINES ONLY*
DIFFERENTIAL TEMPERATURE	100°-250° F	4007	-	-	_	4349	-	INCLUDES 1,8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
<u>Digital Pro-Shift System-Level 1</u> Digital Pro-Shift System-Level 2		4387 4388	_		_	_		AMBER LED INDICATORS 5 STAGE SHIFT POINT & MULTI COLOR LED
DIGITAL PRO-SHIFT SYSTEM-LEVEL 3		4389						RPM PLAYBACK, 5 STAGE SHIFT POINT & MULTI COLOR LED
D-PIC ACCELEROMETER	-2G-+2G	4380	_	_	_	<u></u>	_	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSEPOWER
EXHAUST PRESSURE	0-60 PSI	4392	I	4325	_	_		<b>DIGITAL STEPPER MOTOR GAUGES</b> INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 6' COPPER LINE.
XHAUST PRESSURE	0-100 PSI	4394	-	4326	-	_	_	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)	_	_	, i <del></del>	-	4317	4417	WORKS WITH MOST PRE-1965 CHEVY/GM SENDERS
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)				_	4314	4414	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	<del>-</del>	<u> </u>	<u> </u>	<del></del>	4318	4418	WORKS WITH MOST 1989 (187 MUSTANG) AND LATER FORD  WORKS WITH MOST PRE 1989 (PRE 187 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER.
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	_	_		_	4315	4415	SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (73 Ω E	MPTY/10 Ω FULL) LINEAR	_	_	_	_	4319	_	WORKS WITH LINEAR 73-10 OHM AFTERMARKET SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	-	8_3	8_2	7722	4316	4416	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL LEVEL PROGRAMMABLE	(0 Ω /280 Ω)	4310	_	_		_	_	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE FUEL PRESSURE W/PEAK & WARNING	0-15 PSI 0-15 PSI	4367	4470	4311	4411			DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND
FUEL PRESSURE	0-30 PSI	4367	4470	<del>-</del>		_		8' WIRING HARNESS.
FUEL PRESSURE	0-100 PSI			4312	4412	_	_	100000000000000000000000000000000000000
FUEL PRESSURE W/PEAK & WARNING	0-100 PSI	4371	4472			_		MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP
FUEL PRESSURE FUEL PRESSURE	0-7 BAR 0-1.0 BAR	4363-M	_	4311-M	_		_	AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE WITH ISOLATOR	0-1.0 BAN			4313	4413			INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	4374	4474			- <del></del>	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE DIL PRESSURE	0-2000 PSI 0-100 PSI	_		4328 4321	4428 4421	4327	4427	REQUIRES #4 BRAIDED LINE
OIL PRESSURE W/PEAK & WARNING	0-100 PSI	4352	4452	4321	4421	4321		DIGITAL STEPPER MOTOR ELECTRIC OIL PRESSURE GAUGES INCLUDE 1,8" NPT SENDER AND
OIL PRESSURE	0-150 PSI			4323	4423			8' WIRING HARNESS.
OIL PRESSURE	0-200 PSI	<del>-</del>	_	4322	4422	_	_	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL PRESSURE OIL PRESSURE	0-7 KG/CM2 0-7 BAR			_	4421-J	4327-M	=	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TANK TEMPERATURE	140°-340° F		_	4346	_		_	INCLUDES 4' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE W/PEAK & WARNING	100°-340° F	4340	4440	A241	4441		_	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
OIL TEMPERATURE OIL TEMPERATURE	140°-280° F 100°-250° F		_	4341	4441	4347	_	INCLUDES 6" CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-300° F			- 1-	- a	4348	4447	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
DIL TEMPERATURE	60°-170° C	_	<del>-</del>	_	4424	4348-M	_	DECHINES W DUVIDED TIME
PRESSURE PRNDL+ GEAR SHIFT I	0-400 PSI	4359			4424			REQUIRES #4 BRAIDED LINE INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
PYROMETER KIT	0°-1600° F	4344	4444		72.2			
PYROMETER	0°-2000° F	4345	_		_	_		INCLUDES PROBE AND 10' OF THERMO COUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS. INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
PYROMETER Temperature	0°-900° C 140°-340° F	4344-M			4435			In It Black it a section may consuper our design accommon and a service and
TRANSMISSION TEMPERATURE	140°-340° F	_		4351	4435	_	=	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
TRANSMISSION TEMPERATURE	100°-250° F	_	_			4357	4457	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VACUUM VOLTMETER	30 IN. HG		_	4384	4484	/201	4401	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
	8-18 VOLTS	4383	4483			4391	4491	INCLUDES 8' WIRING HARNESS.



DIGITAL STEPPER MOTOR		SHORT SWEEP ELEC.
--------------------------	--	----------------------

GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
WATER PRESSURE	0-35 PSI			4307	4407			INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
WATER PRESSURE	0-60 PSI		_	4324	_			INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
WATER PRESSURE W/PEAK & WARNING	0-100 PSI	4368	_	_		_	-	INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.
WATER TEMPERATURE	60°-210° F	4369	4469	_	_			INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F			1	_	4337	4437	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE W/PEAK & WARNING	100°-260° F	4354	4454	-	_			INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
WATER TEMPERATURE	140°-280° F	100 TO	- 1 <del></del>	4331	4431			INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	_		4332	4432	_	_	INCLUDES O CAPILLANT TODING AND 1/2 INFT FITTING.
WATER TEMPERATURE	120°-240° F	<del></del>	_	4333	4433	_		INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	40°-120° C	_	_	_		4337-M	_	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	60°-140° C	_	, r <u>—</u>		4431-M		_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.

#### PEDESTAL MOUNT TACHOMETER OPERATES ON MOST 4 5, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS. STANDARD. AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	25/8"	33/4"	5"
9,000 RPM	<b>DUAL RANGE DIAL</b>	FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	_		6854
11,000 RPM	DUAL RANGE DIAL	FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	_	Ĩ	6855
9,000 RPM		FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	1.		6856
8,000 RPM		FEATURES ARE HISTARIE REPUBLIC POLITICA		3781	-
10,000 RPM	MONSTER™	FEATURES ADJUSTABLE REDLINE POINTER	_		3910
10,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT	_	_	3911
11,000 RPM		FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE			6858
5,000 RPM	DIESEL	DIESEL TACH INCLUDES INDUCTIVE PICKUP THAT STRAPS TO ALTERNATOR.	3788		-
8,000 RPM		OPERATES ON 4, 6, OR 8 CYLINDER ENGINES WITH POINTS, ELECTRONIC, AND MOST 12 VOLT HIGH PERFORMANCE RACING IGNITIONS.	3707		10
9,000 RPM	PLAYBACK	SPORT COMP W/ 80 SEC. RECORD TIME AND LAUNCH LIGHT. (1-12 CYL)	_		3964
11,000 RPM	PLAYBACK	SPORT COMP W/ 80 SEC. RECORD TIME AND LAUNCH LIGHT. (1-12 CYL)	_	_	3965

#### IN-DASH TACHOMETER

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

	RANGE	DESCRIPTION	INFO	33/8"	5"
	10,000 RPM	DUAL RANGE DIAL	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE	_	4499
	10,000 RPM	MEMORY	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE	_	4494
596	10.000 RPM		FOR IN-DASH MOUNTING	4497	4498

#### **5" PRO-STOCK TACHOMETER**

OPERATES ON MOST 4. 6. AND 8 CYLINDER ENGINES, COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	5"
9,000 RPM	PEDESTAL	FEATURES LAUNS HOLD A STACE SHIFT HOLD AND MEMORY INCHIRES 40 LED SHIPE LITE	6832
11,000 RPM	PEDESTAL	FEATURES LAUNCH LIGHT, 4 STAGE SHIFT LIGHT, AND MEMORY. INCLUDES 12 LED SUPER LITE	6834

#### 33/4" MEMORY TACHOMETER

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"
10,000 RPM	PEDESTAL	FEATURES PEAK RPM MEMORY W/ REMOTE MOUNTED MEMORY SWITCH	6604

#### 33/8" & 5" IN-DASH SPEEDOMETER

RANGE	DESCRIPTION	INFO	33/8"	5"
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.	4492	
160 MPH	MECHANICAL	SPEEDOMETER CABLE IS REQUIRED.	4493	4495
200 MPH	MECHANICAL	5" MOUNTS INTO A 4 5/8" DIAMETER HOLE, 3 3/8" MOUNTS INTO A 3 3/8" DIAMETER HOLE.		4496
120 MPH	ELECTRICAL	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED	4487	200
160 MPH	ELECTRICAL	SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE	4488	4489
190 km/h	ELECTRICAL	APPLICATIONS.	4487-M	2 <del></del>
200 MPH	ELECTRICAL	ALSO COMPATIBLE WITH GPS MODULE 5289.	4486	4490
260 km/h	ELECTRICAL	5" MOUNTS INTO A 4 5/8" DIAMETER HOLE, 3 3/8" MOUNTS INTO A 3 3/8" DIAMETER HOLE.	0. 0.	4489-M
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/ HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	4480	4481

## **SPORT-COMP**





An industry icon since the 1970's, Auto Meter's Sport-Comp gauges reinvented performance instrumentation as we know it. A clean, easy to read design, highly ruggedized movements built to withstand the rigors of competition and the legendary look that set the standard in racing. Form follows function in a purpose built line of gauges designed and built to accomplish the singular mission of providing the most accurate information possible to the driver. Just as at home on the street as they are on the racetrack, this timeless design is the finishing touch to set off any serious build. Sport-Comp gauges are a huge part of the reason why Auto Meter holds more motorsport victories than every other gauge company combined.





#### SHIFT-LITE TACHOMETER

## **Tachometers**

IN-DASH TACHOMETER





IN-DASH TACHOMETER

3 3/8
3 4 5
3 4 5
1 7 7

AUSD ANGER 8
11000

IN-DASH SPEEDOMETER/ELECTRIC



## Speedometers

IN-DASH GPS SPEEDOMETER/ ELECTRIC



IN-DASH SPEEDOMETER/ MECHANICAL



# Instruments



PRESSURE



Short Sweep Electric

VOLTMETER



Full Sweep Mechanical Water

WATER TEMPERATURE



WATER TEMPERATURE



# SPORT-COMP<sup>\*</sup>



	DIGI STEP MOT	PER FOR	2000	EEP CH.	ELI	ORT EEP EC.	⊚ = DIGITAL GAUGE	
GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	3375	_	_	_		-	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO	(AFR/LAMBDA)	3378	_	_	=	_	_	PRO INCLUDES BOSCH 4.2 02 SENSOR. SEEWEBSITEFOR MOREINFORMATION
AIR FUEL RATIO-WIDEBAND PRO PLU		3397			_		_	PRO PLUS INCLUDES BOSCH 4.9 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG		3370	3579	_	_	_	_	ANALOG INCLUDES BOSCH 4.2 OZ SENSOR. SEE WEBSTE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET	(10:1-17:1AFR)	3379	_	_	_	_	_	STREET INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR PRESSURE	0-150 PSI	_		3320	_	_	_	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
DUAL AIR TEMPERATURE	0°-300° F	3358		_	-	_	_	INCLUDES TWO 3/8" NPT SENDER & 8" WIRE HARNESS
AMMETER	60-0-60 AMPS	_	_	_	_	_	3586	REQUIRES 10 GAUGE WIRE
BLOWER PRESSURE	0-60 PSI			_	3402	_	_	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
BOOST	0-15 PSI	3350	_	3302		_	_	HIGH HOLD ON THE HIGH CONTROL OF THE HOLD
BOOST	0-35 PSI			3304	3404	_	_	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" to 1/4" NPT  ADAPTER FITTING.
BOOST	0-2.5 KG/CM2	_	_	3304-J	3404-J	_	_	AVAPTER FITTING.
BOOST CONTROLLER	30 IN. HG/30 PSI	3381	_	_	_	_	_	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOOST/VACUUM	30 IN. HG/20 PSI	_	_	3301	3401	_	_	
BOOST/VACUUM	30 IN. HG/30 PSI			3303	3403		-	
BOOST/VACUUM	30 IN. HG/45 PSI	_	_	3308	_	_		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
	60 CM./HG-2.0 BAR	_		3303-M	_	_	_	outre recens to the south of a selection of the south of
	M./HG-2.0 KG/CM2		-	3303-J	3401-J	_	_	
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./15 PSI	3376	_	12.00	_	_	_	HIGH HAPPA MAD OF HOOD HARMED AND THE STREET
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./30 PSI	3377	_	_	_	_	_	INCLUDES MAP SENSOR, UNIVERSALT-FITTING AND 8' WIRING HARNESS
CLOCK-ANALOG		_	-	_	-	_	3585	12 HOUR, QUARTZ MOVEMENT WITH SECOND HAND
CYLINDER HEAD TEMP.	140°-340° F	_		_	_	3336	3536	INCLUDES 1/8" NPT SENDER
DIFFERENTIAL TEMPERATURE	100°-250° F	_	_	_	_	3349	_	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1		3387	_	_	_	_	_	AMBER LED INDICATORS.
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2		3388		_	_		_	5 STAGE SHIFT POINT & MULTI COLOR LED.
DIGITAL PRO-SHIFT SYSTEM-LEVEL 3		3389		_		_	_	RPM PLAYBACK, 5 STAGE SHIFT POINT & MULTI COLOR LED.
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)		_	_	_	3317	3517	WORKS WITH MOST PRE-1965 CHEVY/GM SENDERS
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	_	_	_	_	3314	3514	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)		_			3318	3518	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	_	_	_	_	3315	3515	WORKS WITH MOST PRE 1989 IPRE '87 MUSTANGI FACTORY FORD AND MOST FACTORY CHRYSLER, Sender may not read properly with aftermarket or reproduction senders.
FUEL LEVEL (73 Ω E	MPTY/10 Ω FULL) LINEAR			_		3319		WORKS WITH LINEAR 73-10 OHM AFTERMARKET SENDERS.
FUEL LEVEL (7322			_		_		2510	
	(240 Ω EMPTY/33 Ω FULL)	- 0010	_	_	_	3316	3516	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL LEVEL PROGRAMMABLE FUEL PRESSURE	(0 Ω/280 Ω) O-15 PSI	3310 3361	3561	3311	3411	_	70-57	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-100 PSI	3363	3563	3312	3412		_	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND
FUEL PRESSURE	0-7 BAR	3363-M		- 3512	J412	_	_	8' WIRING HARNESS.
FUEL PRESSURE	0-7 KG/CM2	_		3312-J	3412-J	_	_	
FUEL PRESSURE	0-1.0 BAR	_	_	3311-M	_	_	) <u></u>	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING
FUEL PRESSURE	0-1.0 KG/CM2			3311-J	1-		-	CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE WITH ISOLATOR	0-15 PSI	_	_	3313	3413	_	_	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	3374	3574			_		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-2000 PSI		_	3328	3428	_	-	REQUIRES #4 BRAIDED LINE
OIL PRESSURE	0-100 PSI	_	_	3321	3421	3327	3522	MEGULANICAL OU DECOURE CALIFER INCLUDE AS ANY ON TURBULA AND ANY
OIL PRESSURE	0-150 PSI	— p		3323	3423	_	_	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4"
OIL PRESSURE	0-200 PSI	_	_	3322	3422	_	_	NPT FITTINGS.
OIL PRESSURE	0-7 KG/CM2	<u> </u>		_	3421-J	_	_	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND
OIL PRESSURE	0-14 KG/CM2	_	_	3322-J	_	0007.81	0000.11	1/4" NPT FITTING.
OIL PRESSURE	0-7 BAR	_	_	2241	2441	3327-M	3522-M	
OIL TEMPERATURE OIL TEMPERATURE	140°-280°F 140°-280°F	_	_	3341	3441 3443	_	_	INCLINES & CADILLADA LIMINO WIN 1504 ND CILLING
OIL TEMPERATURE	60-140° C		_	3341-M	3443	_		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-300°F			3341-14		3348	3543	
OIL TEMPERATURE	100°-250° F					3347	3542	
OIL TEMPERATURE	60-150° C			_	_	3348-M	- 0342	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	40-120° C		_		_		3542-M	motored by the ventury of Alle by the Hellings.
OIL TEMPERATURE	60°-170° C	_	_	_	_	_	3543-M	
	INDICATOR GAUGE	3359	_	_	-			INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
PYROMETER KIT	0°-1600° F	3344	3544	_				INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE
			0077	0. 0.		- 12 E		MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP
PYROMETER KIT	0°-900° C	3344-M	-	_	_	_	_	METHOD.
TRANSMISSION TEMPERATURE	140°-280°F	_	_	3351	3451	_	_	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
TRANSMISSION TEMPERATURE	100°-250° F	— g			1-	3357	3552	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VACUUM	30 IN. HG	-	_	3384	3484	_	_	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	_	_	_	_	3391	3592	





GAUGE CHART CONTINUED			DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		ORT EEP EC.	
GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
WATER TEMPERATURE	60°-210° F	_	3569	_	_	_	_	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	_	_	_	_	3337	3531	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	140°-280° F	_	_	3331	3431	_	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	_	_	3332	3432	_	_	INGLODES & GAFILLARY FORMED AND 1/2 NET FITTING.
WATER TEMPERATURE	120°-240° F	-	1-	3333	3433	1		INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	40°-120° C	_	_	_	_	3337-M	_	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	60°-140° C	_	_	-	3431-M	1—		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	50°-115° C	_	_	3332-M		_	_	INCLUDES O CAPILLANT FUBING AND 1/2 NPT FITTING.

PEDESTAL M	OUNT TACHOMETER	OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS			
RANGE	DESCRIPTION	INFO	25/8"	33/4"	5"
8,000 RPM	MINI COMPETITION	OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	3708	_	8—8
8,000 RPM		MONSTER™ TACHOMETER WITH ADJUSTABLE REDLINE POINTER	_	3780	3980
8,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT	-	_	3905
9,000 RPM	PLAYBACK	PLAYBACK TACH W/ 80 SEC. RPM RECORD TIME.	_	-	3966*
10,000 RPM		MONSTER™ TACHOMETER WITH ADJUSTABLE REDLINE POINTER	_	3700	3900
10,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT			3904
10,000 RPM	SHIFT-LITE	SHIFT LITE TACHOMETER W/ AMBER LIGHT ON SHIELD	_		3903
10,000 RPM	SHIFT-LITE W/ MEMORY	2 STAGE SHIFT LITE TACH W/ EXT. AMBER LIGHT AND PEAK RPM MEMORY RECALL	_	_	3906*
11,000 RPM	PLAYBACK	PLAYBACK TACH W/ 80 SEC. RPM RECORD TIME.	—	_	3967*
		* OPERATES ON MOST 2	3, 4, 5, 6, 8, 10,	& 12 CYLINDE	R ENGINES.

IN-DASH TACHOMETER		OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS		
RANGE DESCRIPTION		INFO	33/8"	5"
10,000 RPM	IN-DASH	FITS IN 4 5/8" HOLE	1-	3990
8,000 RPM	IN-DASH	SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL MOUNTING	3991	_

IN-DASH SPEEDOMETER		5" MOUNTS INTO A 45/8" DIAMETER HOLE, 33/8" MOUNTS INTO A 33/8" DIAMETER HOLE.		
RANGE	DESCRIPTION	INFO	33/8"	5"
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.		3994
160 MPH	MECHANICAL	SPEEDOMETER CABLE IS REQUIRED.	_	3995
160 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	_	3989
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.  SPEEDOMETER CABLE IS REQUIRED.	3992	-
120 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED	3987	_
160 MPH	ELECTRIC	SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE	3988	_
190 KPH	ELECTRIC	APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3987-M	_
140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS, HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	3982	3983







Taking the winning formula behind Auto Meter's Sport-Comp gauges and injecting the clean style of a white dial and a black powder coated bezel, these competition proven instruments remain one of the best selling lines in our history. The high contrast design and florescent orange pointer makes them incredibly easy to read at a glance in any conditions. Over engineered internals mean these gauges will stand up to whatever you can throw at them, on or off the track. With their unique look and legendary durability, the Phantom series has become an icon, setting the standard for quality and dependability in white dialed instruments.







## Tachometers

IN-DASH TACHOMETER







IN-DASH SPEEDOMETER/ELECTRIC

# Speedometers

IN-DASH SPEEDOMETER/

ELECTRIC





MECHANICAL 80

IN-DASH SPEEDOMETER/



## Instruments



**PROGRAMMABLE** 



Short Sweep Electric

VOLTMETER



Full Sweep Mechanical WATER TEMPERATURE

WATER TEMPERATURE







		DIGITAL MO			FULL SWEEP S		SWEEP TRIC	(88) = DIGITAL GAUGE
GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25%"	INFO
AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	5775	_	_	_	_	_	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO	(AFR/LAMBDA)	5778	_	-	_	_	-	PRO INCLUDES BOSCH42 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG	(8:1-18:1 AFR)	5770	5879	-	-	_	-	ANALOG INCLUDES BOSCH 42 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET	(10.1-17.1 AFR)	5779	_	-	<u> </u>	_	-	STREET INCLUDES BOSCH4202 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR PRESSURE	0-150 PSI			5720	_	_	_	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" to 1/4" NPT ADAPTER FITTING.
DUAL AIR TEMPERATURE BLOWER PRESSURE	0°-300° F	5758	_	_		_	_	INCLUDES TWO 3/8" NPT SENDER, & 8" WIRE HARNESS
BOOST	0-60 PSI 0-15 PSI	5750		5702	5802	_		DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND
BOOST	0-35 PSI	-	_	5704	_	_		8' WIRING HARNESS, AND 1/8" to 1/4" NPT ADAPTER FITTING.
BOOST	0-60 PSI	-	_	5705	-	_	_	MECHANICAL GAUGES INCLUDES 10" NYLON TUBING, COMPRESSION FITTINGS & 1/8" to 1/4" NPT ADAPTER FITTING.
BOOST	0-100 PSI	_		5706		_	_	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	5782		-	_	_	-	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOOST/VACUUM BOOST/VACUUM	30 IN. HG/20 PSI 30 IN. HG/30 PSI			5701 5703	5801 5803	_		
BOOST/VACUUM	30 IN. HG/45 PSI			5708		_	-	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	60 CM./HG-2.0 BAR			5703-M	<u> </u>		-	INDUIDED MAD OFNOOD UNIVERDAL TEXTURE SUMBLING HARVESS S
BOOST/VACUUM W/PEAK & WARNIN BOOST/VACUUM W/PEAK & WARNIN		5776 5777	5877	_			_	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING, 8' WIRING HARNESS, & 10 1/2' NYLON TUBING
CLOCK-ANALOG		_			_	5785	5885	12 HOUR. QUARTZ MOVEMENT WITH SECOND HAND
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	5786	_	_	_	_	_	2003-2007.5 DODGE CUMMINS 5.9L & LB7 & LLY GM DURAMAX ENGINES ONLY *
DIESEL FUEL RAIL PRESSURE DIESEL HPOP PRESSURE	0-30,000 PSI 0-4,000 PSI	5793 5796			_			2007.5 & NEWER DODGE CUMMINS 6.7L & LBZ & LMM GM DURAMAX ENGINES ONLY *  1994 – 2007 FORD POWERSTROKE 7.3L & 6.0L ENGINES ONLY *
DIFFERENTIAL TEMPERATURE	100°-250° F	_		_		5749	_	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
D-PIC ACCELEROMETER	-2G-+2G	5781	_	_	_	_	_	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSEPOWER
DIGITAL PRO-SHIFT SYSTEM-LEV DIGITAL PRO-SHIFT SYSTEM-LEV		5787	_	_	-	_	_	RED DIGITAL DISPLAY/ AMBER LED INDICATORS
50		5788				_		5 STAGE SHIFT POINT & MULTI COLOR LED
EXHAUST PRESSURE	0-60 PSI	5792	_	5725	-		1	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS, AND 6" COPPER LINE.  MECHANICAL GAUGES INCLUDES 10" NYLON TUBING, 6" COPPER TUBING AND COMPRESSION
EXHAUST PRESSURE	0-100 PSI	5794	_	5726	_	-	_	FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)		_	_	_	5717		WORKS WITH MOST PRE-1965 CHEVY/GM SENDERS
FUEL LEVEL FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL) (16 Ω EMPTY/158 Ω FULL)			_	_	5714 5718	5814	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	_	-	-	_	5715	5815	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (73 Ω	EMPTY/10 Ω FULL) LINEAR	-	_	1-	0	5719	-	WORKS WITH LINEAR 73-10 AFTERMARKET SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	_	_	-		5716	5816	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262
FUEL LEVEL PROGRAMMABLE	(0 Ω/280 Ω)	5710				_		FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE FUEL PRESSURE	0-15 PSI 0-30 PSI	5761 5760		_	5810	_	_	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8'
FUEL PRESSURE	0-100 PSI	5763	5863	5712	5812	_	_	WIRING HARNESS.
FUEL PRESSURE	0-7 BAR	5763-M	_	F711 M			_	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP  AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE FUEL PRESSURE WITH ISOLATOR	0-1.0 BAR 0-15 PSI	_	_	5711-M	<u>-</u> 5813	_	_	INCLUDES ISOLATOR AND 4' LINE REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	5774		_	_	_	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-2000 PSI			5728	5828			REQUIRES #4 BRAIDED LINE
OIL PRESSURE OIL PRESSURE	0-100 PSI 0-150 PSI	_		5721 5723	5821 5823	5727	5827	MECHANICAL OIL PRESSURE GAUGES INCLUDE 6' NYLON TUBING, 1,8" AND 1,4" NPT FITTINGS.
OIL PRESSURE	0-200 PSI	_		- 5/23	5822	_	_	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER
OIL PRESSURE	0-7 BAR			_		5727-M	_	AND 1/4" NPT FITTING.
OIL TEMPERATURE	100°-250° F	_		_	_	5747	5847	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE OIL TEMPERATURE	140°-280° F 60-150° C			5741	5841	5748-M		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
	NDICATOR GAUGE	5759		=	_	5/48-IVI —	=	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.  INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
PYROMETER KIT	0°-1600° F	5744	5844	_	<u> </u>	_	_	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE, PROBE INCLUDES
PYROMETER KIT	0°-2000° F 0°-900° C	5745						MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
PYROMETER KIT TRANSMISSION TEMPERATURE	100°-250° F	5744-M		_	_	5757	5857	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	140°-280° F	_		_	5851	_	_	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
VACUUM	30 IN. HG.	_		5784	5884			INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER WATER TEMPERATURE	8-18 VOLTS 100°-250° F	_			_	5791 5737	5891 5837	INCLUDES 1/8" NPT SENDER, 3/6" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	120°-240° F	_		5732	5832			2333 5 CO. A CHERT & THE ORIGINAL SECTION SECTION OF SECTION SECTION AND SECTI
WATER TEMPERATURE	140°-280° F	_		5731	5831		-	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	40°-120° C	_	_	_	_	5737-M	_	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.

<sup>\*</sup> Works with factory sensors/parameters
The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.





#### PEDESTAL MOUNT TACHOMETERS

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
8,000 RPM		FEATURES ADJUSTABLE REDLINE POINTER	5780	11_2
10,000 RPM	MEMORY	PEAK RPM MEMORY RECALL	_	5795*
10,000 RPM	SHIFT-LITE	SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE	_	5899

(\* Compatible with 2,3,4,5,6,8,10, & 12 cylinder)

#### **IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS FOR 3 3/8" MODEL. 5" MODEL FITS IN A 4 5/8" HOLE.	5897	5898

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"	5"
120 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED	5887	S
160 MPH	ELECTRIC	SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE	5888	5889
190 KPH	ELECTRIC		5887-M	9 <del>-3</del> 3
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.		5895
200 MPH	MECHANICAL	SPEEDOMETER CABLE IS REQUIRED.	_	5896
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/ HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	5880	5881







## Tachometers



IN-DASH SPEEDOMETER/ELECTRIC



Speedometers & Tachometers

3 3/8 60 B0 40 MPH

IN-DASH GPS SPEEDOMETER/ ELECTRIC

## Instruments



Digital Stapper

Motor

Short Sweep Electric

Full Sweep Meter Water



WATER TEMPERATURE





DIGITAL STEPPER FULL SWEEP SHORT SWEEP MOTOR

= DIGITAL GAUGE

GAUGES	RANGE	21/16"	25/8"	21/16"	25/8"	21/16"	25/8"	INFO
AIR FUEL RATIO-NARROY	WBAND (LEAN-RICH)	4775	_	_	-	-	<u>12—8</u> 8	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND	D PRO (AFR/LAMBDA	4778		_		-	_	PRO INCLUDES BOSCH 4.2 02 SENSOR.
AIR PRESSURE	0-150 PSI	_		4720	10-T-0	10-	<del>77 -</del> 8	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
BOOST	0-35 PSI	_	_	4704	_	_	_	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" to 1/4" NPT ADAPTER FITTING.
BOOST/VACUUM	30 IN. HG/20 PSI	_	_	4701	4801	-		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	_	_	4703	4803	-	-	INCLUDES IN INTLUM FUBING AND UNIVERSAL I-FILTING
<b>BOOST/VACUUM</b> W/PEAK & W	ARNING 30 IN. HG/15 PSI	4776		1-	10-	77.		INCLUDES MAP SENSOR UNIVERSALT-FITTING AND 8' WIRING HARNESS. PEAK RECALL LED ALARM LIGHT
<b>BOOST/VACUUM</b> W/PEAK & W	ARNING 30 IN. HG/30 PSI	4777	_	_	-	-	_	TIVOLODES MAR SENSON, UNIVERSAL I-FITTIIVO AND 6 WINING HANNESS. FEAK RECALL, LED ADARM LIGHT
BRAKE PRESSURE	0-1600 PSI		4867		2	_		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	_	_		_	4714	4814	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	_		2-		4718	-	WORKS WITH MOST 1989 (187 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)		_	_	-	4715	4815	WORKS WITH MOST PRE 1989 (PRE 87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	_	_	_	-	4716	4816	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	4761	_	4711	4811		_	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS.
FUEL PRESSURE	0-100 PSI	4763	4863	4712	4812	-		MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
<b>FUEL PRESSURE W/ISOL</b>	ATOR 0-15 PSI	_		_	4813		_	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	4774		_	-	35-3	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-2000 PSI	_	_	4728	4828	_	_	REQUIRES #4 BRAIDED LINE
OIL PRESSURE	0-100 PSI	-	_	4721	4821	4727	4827	MECHANICAL DIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. Short Sweep Electric dil pressure gauges include 1/8" NPT Sender and 1/4" NPT FITTING.
OIL TEMPERATURE	140°-280° F	_	_	4741	4841	-	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-300° F	_		_	<u> </u>	4748	4848	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PYROMETER KIT	0°-1600° F	4744	_	_	_	_	_	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
TRANSMISSION TEMPER	RATURE 140°-280° F	_	_	_	4851	_		INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
TRANSMISSION TEMPER	RATURE 100°-250° F	_	_	_	_	4757	_	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VACUUM	30 IN. HG	_	_	4784	4884	_	_	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VACUUM	30 IN. HG	_	4871	_	-		-	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS
VOLTMETER	8-18 VOLTS	_		_	_	4791	4891	
WATER TEMPERATURE	100°-250° F		_	_		4737	4837	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	_	_	4731	4831	-		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	_		4732	4832			INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.

#### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	5"
9,000 RPM	SHIFT-LITE	PRO-STOCK MEMORY. INCLUDES 12 LED SUPER LITE AND FEATURES 4 SEPARATE SHIFT POINTS (4 STAGE)	6835
10,000 RPM	SHIFT-LITE	SHIFT-LITE: INCLUDES EXTERNAL INCANDESCENT SHIFT LIGHT	4899
11,000 RPM	SHIFT-LITE	PRO-STOCK MEMORY. INCLUDES 12 LED SUPER LITE AND FEATURES 4 SEPARATE SHIFT POINTS (4 STAGE)	6836

#### **IN-DASH TACHOMETERS**


OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS FOR 3 3/8" MODELS. 5" MODEL FITS INTO A 4 5/8" HOLE.	4798	4898
10,000 RPM	MEMORY	FEATURES MEMORY TO "RECALL" THE HIGHEST RPM DURING A RUN. MOUNT IN A 3-3/8" HOLE	_	4894

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"	5"
160 MPH	ELECTRIC	PROGRAMMABLE SPEED OMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	4789	4889
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	4793	
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/ HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	4780	4881

## PRO-COMP\*



#### SHIFT-LITE TACHOMETER

## Tachometers

6857

IN-DASH TACHOMETER



IN-DASH TACHOMETER



IN-DASH SPEEDOMETER/ELECTRIC

#### Tachometers Speedometers &



IN-DASH SPEEDOMETER/ MECHANICAL



PEDESTAL TACHOMETER



Instruments

Liquid Filled Full Sweep Mechanical

Short Sueep Electric

Digital Stappar Motor

LOW TEMP. WATER TEMP.



OIL PRESSURE

WATER TEMPERATURE

240

VOLTMETER



180 25/8 5469

5492





DIGITAL FULL SHORT

		STEPPER MOTOR	SWEEP MECHANICAL	SWEEP ELECTRIC	
GAUGES	RANGE	25/8"	25/8"	25/8"	INFO
BLOWER PRESSURE	0-60 PSI	_	* 5402	_	INCLUDES 10' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
<b>BLOWER PRESSURE w/</b>		_	* 5403	_	INCLUDES 3230 MEMORY KIT. REQUIRES #4 LINE.
BOOST	0-35 PSI		* 5404		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/20 PSI	<del></del> .	* 5401	-	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BRAKE PRESSURE	0-2000 PSI	-	* 5426	-	INCLUDES T-FITTING, 3/8" OD X 1/8"-27 NPT FITTING. USE ONLY APPROVED BRAKE LINES
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	_	_	5415	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(73 $\Omega$ EMPTY/10 $\Omega$ FULL)	_	_	5416	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	_	_	5417	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	5461	* 5411	=()	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.  MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND
FUEL PRESSURE	0-100 PSI	_	* 5412	_	MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE WITH	ISOLATOR 0-15 PSI	_	* 5413	_	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
LOW TEMP. WATER TEM	MP. 60°-210° F	5469		_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS, 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	_	* 5421	5427	MECHANICAL DIL PRESSURE GAUGES INCLUDE 6' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC DIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-200 PSI	_	* 5422		INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL TEMPERATURE	140°-280° F	_	* 5441	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-280° F	_	* 5443	<del>-</del>	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-300° F	_		5447	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PRESSURE	0-300 PSI	1 <del>1</del>	* 5423	_	S 50 500
PRESSURE	0-400 PSI	_	* 5424	_	REQUIRES #4 BRAIDED HOSE KIT.
PRESSURE	0-600 PSI	_	* 5425		
PYROMETER KIT	0°-1600° F	5444		==0	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
TEMPERATURE	140°-340° F	_	* 5435	_	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
TRANSMISSION TEMPE			* 5451		
TRANSMISSION TEMPE		_		5457	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VACUUM	30 IN. HG	_	* 5484		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	_	_	5492	
WATER TEMPERATURE		_	_	5437	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE		_	* 5433	_	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	_	* 5432		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	140°-280° F	_	* 5431	_	וווטבטטבטט סחו בבחור וסטוונס חוא ון ב זור רוווווווווווווווווווווווווווווווו

#### \* - Liquid Filled Models

# PEDESTAL MOUNT TACHOMETER THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/4"	5"
6,000 RPM	DIESEL	INCLUDES PROBE. FABRICATION IS REQUIRED. MODIFICATIONS TO BALANCER OR FLYWHEEL ARE REQUIRED.	_	6806
9,000 RPM	DUAL RANGE MEMORY	FEATURES 2 STAGE SHIFT LIGHT AND PEAK RPM MEMORY. INCLUDES LED AMBER		6852
9,000 RPM	MEMORY	QUICK-LITE SHIFT LIGHT		6851
9,000 RPM	MEMORY	PEAK RPM MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE.	_	6809
10,000 RPM	STANDARD	ELECTRIC	5610	
10,000 RPM	MEMORY	FEATURES MEMORY INCLUDES REMOTE MOUNTED MEMORY SWITCH	6601	_
11,000 RPM	MEMORY	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE.		6811
11,000 RPM	MEMORY	FEATURES 2 STAGE SHIFT LIGHT AND PEAK RPM MEMORY. INCLUDES LED AMBER QUICK-LITE SHIFT LIGHT	-	6857

#### IN-DASH TACHOMETERS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING	5161	5160
10.000 RPM	MEMORY	FEATURES MEMORY TO RECALL HIGHEST RPM	_	6801

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"	5"
120 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	5152	:
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	5153	5154
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMAPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS.  MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	_	5189
200 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.		5156

# **Z-SERIES**™



## Tachometers

STREET TACHOMETER

IN-DASH TACHOMETER

**T**ACHOMETER

IN-DASH TACHOMETER









## Speedometers & Tachometers

In-Dash Speedometer/ Mechanical

IN-DASH SPEEDOMETER/ ELECTRIC

IN-DASH GPS SPEEDOMETER/

DIESEL TACHOMETER









## Instruments

Digital Stappar Motor

**PYROMETER** 




Short Sweep Electric On



Full Sweep
Weshenisel
Air
Pressure





	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES RANGE	21/16"	21/16"	21/16"	INFO
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)	2675	_	_	WORKS WITH MOST NARROWBAND 02 SENDERS AND MODEL 2241. SEE WIDEBAND AIRIFUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA	5978		_	PRO INCLUDES BOSCH 02 SENSOR, PROGRAMMABLE RANGE, SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR PRESSURE 0-150 PSI	_	2620	_	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
AMMETER 60-0-60 AMPS	_	_	2644	REQUIRES 10 GAUGE WIRE. DO NOT USE WITH CHARGING SYSTEMS OVER 60 AMPS.
BOOST 0-35 PSI	_	2616		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST 0-60 PSI	_	2617	_	INCLUDES 10' NYLON TUBING & UNIVERSAL T-FITTING
BOOST 0-100 PSI	A	2618	_	INCLUDES 10' NYLON TUBING AND 1/8" & 1/4" NPT FITTINGS
BOOST CONTROLLER 30 IN. HG/30 PSI	2681	_	_	INCLUDES MAP SENSOR AND UNIVERSALT-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOOST/VACUUM 30 IN. HG/20 PSI	_	2601		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM 30 IN. HG/30 PSI	_	2614	_	INCLUDES TO WILDIN TODING AND UNIVERSAL PITTING
CLOCK	2632	_	_	QUARTZ MOVEMENT WITH SECOND HAND
DIESEL FUEL RAIL PRESSURE 0-30,000 PSI	2686	_	_	2003-2007.5 DODGE CUMMINS 5.9L & LB7 & LLY GM DURAMAX ENGINES ONLY*
DIESEL FUEL RAIL PRESSURE 0-30,000 PSI	2693	==1	_	2007.5 & NEWER DODGE CUMMINS 6.7L & LBZ & LMM GM DURAMAX ENGINES ONLY*
DIESEL HPOP PRESSURE 0-4,000 PSI	2696	_	_	1994 – 2007 7.3L & 6.0L FORD POWERSTROKE ENGINES ONLY*
DIFFERENTIAL TEMPERATURE 100°-250° F	_	_	2636	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
EXHAUST PRESSURE 0-60 PSI	2672	2611	_	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS, AND 6" COPPER LINE.
EXHAUST PRESSURE 0-100 PSI	2674	2619	_	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL LEVEL (0 Ω EMPTY/30 Ω FULL)	_	-	2648	WORKS WITH MOST PRE-1965 CHEVY/GM SENDERS
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	_	_	2641	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)	_	-	2642	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL) LINEAR	_	_	2650	WORKS WITH LINEAR 73-10 AFTERMARKET SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)	_	_	2643	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE 0-15 PSI	2661	2603	_	FULL SWEEP ELECTRIC FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8" WIRING HARNESS.
FUEL PRESSURE 0-30 PSI	2660	_	_	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE
FUEL PRESSURE 0-100 PSI	2663	2612	_	MOUNTED OUTSIDE THE VEHICLE
OIL PRESSURE 0-100 PSI	_	2604	2634	MECHANICAL DIL PRESSURE GAUGE INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL PRESSURE 0-200 PSI	_	2605	_	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE 100°-250° F		_	2638	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE 140°-280° F	_	2609	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE 140°-300° F		_	2639	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PYROMETER KIT 0°-1600° F	2654		-	INCLUDES PROBE W/ MOUNTING OPTIONS
TRANSMISSION TEMPERATURE 100°-250° F			2640	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE 140°-280° F	-	2615	_	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
VACUUM 30 IN. HG.		2610	-	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER 8-18 VOLTS			2645	FOR ALVALT FUEDTRIAN OVATERIO
VOLTMETER 16-36 VOLTS	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	_	2651	FOR 24 VOLT ELECTRICAL SYSTEMS
WATER TEMPERATURE 100°-250° F		_	2635	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE 120°-240° F	_	2607	-	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE 140°-280° F	_	2606	_	mocouco v oni icanii Toulito nito 1/2 Iti 11111/10.

<sup>\*</sup> Works with factory sensors/parameters

#### PEDESTAL MOUNT TACHOMETER THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYL MOER ENGINES AND ARE COMPATIBLE WITH MOST, STANDARD, AND PERFORMANCE RECITIONIC IGNITIONS

RANGE	DESCRIPTION	INFO	25/8"	33/4"
4,000 RPM	LOW REV	IDEAL FOR TOWING OR RV'S	2890	7-
5,000 RPM	DIESEL	DIESEL: INCLUDES PICK-UP THAT STRAPS TO ALTERNATOR	2888	-
6,000 RPM	LOW REV	MINITACII MITH AD HICTADI E MOUNTING CHD	2891	-
8,000 RPM	,000 RPM STREET	MINI TACH WITH ADJUSTABLE MOUNTING CUP	2892	2894

#### IN-DASH TACHOMETERS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	21/16"	33/8"
5,000 RPM	IN-DASH	FOR PILLAR OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	2697	_
8,000 RPM	IN-DASH	FOR PILLAR OR COP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	2698	2699

#### **IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	33/8"			
120 MPH	IN-DASH/MECHANICAL	5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED	2692			
160 MPH	IN-DASH/MECHANICAL	3/8 - 18 THREADED GABLE INPUT. SPEEDUMETER GABLE 15 REQUIRED				
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	2688			
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	2680			

# TRADITIONAL CHROME



## Speedometers & Tachometers



## Instruments






## Speedometers & Tachometers



IN-DASH SPEEDOMETER/ IN-DASH SPEEDOMETER/ Full Sweep IN-DASH Short Sweep MECHANICAL PROGRAMMABLE ELECTRIC TACHOMETER Machanical Electric 100 80 OII WATER PRESSURE TEMPERATURE 000000 MPH 180 250 WATER RPM 201004 201005 201013 201006



# **TRADITIONAL** CHROME & COBRA

		FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES	RANGE	21/16"	21/16"	INFO
AMMETER	60-0-60 AMPS	_	2586	REQUIRES 10 GAUGE WIRE (NOT FOR USE ON APPLICATIONS WHERE CHARGING SYSTEM PRODUCES MORE THAN 60 AMPS)
BOOST/VACUUM	30 IN. HG/20 PSI	2401		INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	2403	_	INCLUDES IN MILUN TODING AND UNIVERSAL I-FITTING
CLOCK-ANALOG			2585	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)	<del></del>	2517	WORKS WITH MOST PRE 1965 CHEVY/GM SENDERS
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)		2514	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	_	2518	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	-	2515	WORKS WITH MOST PRE 1989 IPRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL) LINEAR	_	2519	WORKS WITH LINEAR 73-13 AFTERMARKET SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	_	2516	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	2411	_	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP.
FUEL PRESSURE	0-100 PSI	2412	_	MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE W/IS		2413	·—	INCLUDES ISOLATOR & 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
HOURMETER	8-32 VOLTS DC INPUT	_	2587	NON-RESETTABLE W/ QUARTZ ACCURACY FOR UP TO 100,000 HOURS
OIL PRESSURE	0-100 PSI	2421	2522	MECH GAUGES INCLUDE 10' NYLON TUBING & 1/8 & 1/4" NPT FITTINGS.
OIL PRESSURE	0-200 PSI	2422	_	SHORT SWEEP ELEC GAUGES INCLUDE 1/8" NPT SENDER & 1/4" NPT FITTING.
OIL TEMPERATURE	100°-250° F		2542	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS.
OIL TEMPERATURE	140°-280° F	2441	_	INCLUDES 6' CAPILLARY TUBING AND 1/2' NPT FITTING.
OIL TEMPERATURE	140°-300° F		2543	INCLUDES 1/8" NPT SENDER & 1/2" NPT FITTING.
TRANSMISSION TEM		<u> </u>	2552	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS.
TRANSMISSION TEM		2451	-	INCLUDES 8" CAPILLARY TUBING AND 1/2" NPT FITTING.
VACUUM	30 IN. HG.	2484	_	INCLUDES 10' NYLON TUBING AND UNIVERSALT-FITTING.
VOLTMETER	8-18 VOLTS	_	2592	
WATER TEMPERATUR			2532	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS.
WATER TEMPERATUR		2432		INCLUDES 6' CAPILLARY TUBING AND 1/2' NPT FITTING.
WATER TEMPERATUR		2433		INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATUR	RE 140°-280° F	2431	_	INCLUDES 6' CAPILLARY TUBING AND 1/2' NPT FITTING.

TA	CLI	-	14			-
IA	CH	u	м		ĸ	.3

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	25/8"	33/4"	33/8"
8,000 RPM	MINI TACH	PEDESTAL FEATURES SUPER BEZEL & CHROME CASE	2893	1	
8,000 RPM	STREET	PEDESTAL FEATURES SUPER BEZEL & INCLUDES ADJUSTABLE REDLINE POINTER & CHROME CASE	_	2895	_
8,000 RPM	RETRO	PEDESTAL SHORT SWEEP TACHOMETER FEATURING SUPER BEZEL & CHROME CASE	_	2897	_
8,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	_	-	2499

#### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	33/8"
120 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS  ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	2489
120 MPH	IN-DASH/MECHANICAL	FOR IN-DASH MOUNTING 5/8"-18 THREADED CABLE INPUT, SPEEDOMETER CABLE IS REQUIRED.	2492
160 MPH	IN-DASH/MECHANICAL	for in-dash mounting 5/8"-18 threaded cable input, speedometer cable is required.	2494
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	2480



IN-DASH TACHOMETER OPERATES ON MOST 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE DESCRIPTION 4" **INFO** 8.000 RPM IN-DASH 201004 IN-DASH MOUNT, 8 CYLINDER ONLY

IN-DASH SPEEDOMETEI
---------------------

RANGE	DESCRIPTION	INFO	4"
180 MPH	IN-DASH/MECHANICAL	REVERSE SWEEP, 5/8"-18 THREADED CABLE INPUT, SPEEDOMETER CABLE REQUIRED. REVERSING ADAPTER #990340 MAY BE NECESSARY FOR SOME APPLICATIONS	201005
180 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETER, REVERSE SWEEP. OPERATES WITH MANY FACTORY AND AFTER MARKET SPEED SENSORS. ALSO COMPATIBLE WITH GPS MODULE 5289	201013

		FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	
GAUGES	RANGE	21/16"	21/16"	INFO
CLOCK-ANALOG		—	201019	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	—)	201975	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	_	201011	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
OIL PRESSURE	0-100 PSI	201006	_	INCLUDES 10' NYLON TUBING & 1/8 & 1/4" NPT FITTINGS.
OIL PRESSURE	0-100 PSI	—	201014	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
<b>OIL TEMPERATURE</b>	100°-250° F	<u>—</u> :	201018	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
OIL TEMPERATURE	60°-140° C	201008	_	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS.
VOLTMETER	8-18 VOLTS	_	201009	to and a supplement of the seeds to the seeds of the seed
WATER TEMPERAT	URE 60°-140° C	201007	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERAT	URE 100°-250° F	_	201015	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER

## **ULTRA-NITE**™



## Tachometer


Not all racing in done on a clean and well lit track. Ultra-Nite gauges are for drivers who dare to hit the dirt and clay tracks. Easily identified by the anodized blue bezels, Ultra-Nite gauges offer a unique design for sprint cars and other related forms of dirt track racing. The luminescent dials glow green at night for dimly lit tracks when no battery is available to light conventional instruments. Also available in Liquid Filled Mechanical for use in the most demanding high shock and vibration racing environments. For RACING USE ONLY, not intended for street applications.



## Instruments

#### Full Sweep Mechanical

#### Liquid Filləd Full Swəəp Məchanical

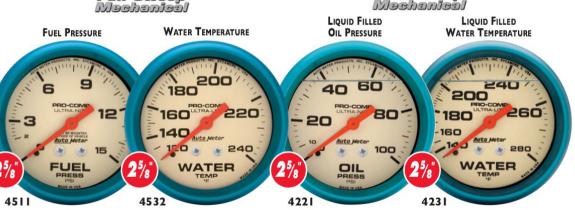

**IN-DASH TACHOMETER** 

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND IS COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS. GAUGE GLOWS IN THE DARK.

RANGE	INFO	5"
10,000 RPM	FEATURES PEAK RPM MEMORY WITH REMOTE MOUNTED RECALL SWITCH.	4594

GAUGES	RANGE	25/8"	LFG	INFO					
FUEL PRESSURE	0-15 PSI	4511	4211	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.					
DIL PRESSURE 0-100 PSI		4521	4221	REQUIRES TUBING (BRAIDED STAINLESS STEEL OR COPPER RECOMMENDED). NO LIGHTING INCLUDED.					
OIL PRESSURE	0-150 PSI	4523	4223	GAUGE GLOWS IN THE DARK.					
OIL TEMPERATURE	140°-280° F	4541	4241	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.					
WATER TEMPERATURE	120°-240° F	4532	-	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.					
WATER TEMPERATURE	140°-280° F	4535	4235	INCLUDES 4' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.					
WATER TEMPERATURE	140°-280° F	4531	4231	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.					





#### **IN-DASH ELECTRIC SPEEDOMETER**

SIZE	RANGE	ULTRA- LITE	SPORT- COMP	CARBON FIBER	PHANTOM	AMERICAN MUSCLE	ARCTIC WHITE	DESIGNER BLACK	OLD TYME WHITE	ANTIQUE BEIGE	INFO
5"	260 KPH	4489-M	_	_	_	_	_	_	_	_	PROGRAMMABLE SPEED OMETERS WORK WITH
33/8"	260 KPH	_	_	_	_	1288-M	_	_	_	_	MOST FACTORY VEHICLE SPEED SENSORS. SENDERS ARE AVAILABLE FOR SOME CABLE
33/8"	190 KPH	4487-M	3987-M	4787-M	5887-M		_	_	_	_	APPLICATIONS. SEE ACCESSORIES. ALSO
3 1/8"	190 KPH	_	_	_	-	_	1388-M	1487-M	1688-M	1887-M	COMPATIBLE WITH GPS MODULE 5289.

#### STREET ROD KITS

SIZE		DESIGNER BLACK	OLD TYME WHITE	ANTIQUE BEIGE	INFO
3 1/8" 5 PIECE ELECTRIC SPEEDO KIT					INCLUDES 3 1/8": ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD
190 KPH ELECTRIC SPEEDOMETER (LCD ODOMETER)	1302-M	1421-M	1602-M	1809-M	ODOMETER. 2 1/16': 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 $\Omega$ E - 33 $\Omega$ FUEL LEVEL, AND 8-18 VOLTMETER.

SPORT-	DIGITAL STEPPER MOTOR	FULL SWEEP MECH.		SHORT SWEEP ELEC.			
GAUGES	RANGE	<b>21/16" 21/16" 25%"</b>		21/16"	25/8"	INFO	
BOOST	0-2.5 KG/CM2		3304-J	3404-J	_		
BOOST/VACUUM	60 CM./HG-2.0 BAR	-	3303-M		-	_	INCLUDES 10' NYLON TUBING , 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	60 CM./HG-2.0 KG/CM2	_	3303-J	3401-J			
FUEL PRESSURE	0-7 BAR	3363-M	_	_			INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-1.0 BAR	_	3311-M	<u> </u>	_	7—7	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED
FUEL PRESSURE	0-1.0 KG/CM2	—	3311-J		_		OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-7 KG/CM2		3312-J	3412-J			OUTSIDE THE VEHICLE.
OIL PRESSURE	0-7 KG/CM2	_	_	3421-J	_		INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-14 KG/CM2		3322-J	_			INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-7 BAR	_		_	3327-M	3522-M	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TEMPERATURE	60°-140° C		3341-M	_			INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE	40-120° C	_	_	_		3542-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	60-170° C		_		3348-M	3543-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PYROMETER KIT (EGT	0°-900° C	3344-M	_	_	_	_	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1,8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
WATER TEMPERATUR		_	<u> </u>	<u> </u>	3337-M		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATUR	E 60°-140° C	_	_	3431-M			INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE 50°-115° C			3332-M	_	_	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING

## ULTRA-LITE™ Phantom®

						-					
		DIGITAL STEPPER MOTOR	70.75	EULI SWEED I		SWEED		DIGITAL STEPPER MOTOR.	FULL SWEEP MECH.	SHORT SWEEP ELEC.	
GAUGES	RANGE	21/16"	21/16"	25/8"	21/16"	21/16"	21/16"	21/16"	INFO		
BOOST/VACUUM	60 CM./HG-2.0 BAR	_	4303-M	_	_	_	5703-M	_	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING		
FUEL PRESSURE	0-7 BAR	4363-M	_	-	1	5763-M			INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS		
FUEL PRESSURE	0-1.0 BAR	a <del>-</del>	4311-M	-	8	_	5711-M	a <del>-</del>	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.		
OIL PRESSURE	0-7 KG/CM2			4421-J		_	_	_	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS		
OIL PRESSURE	0-7 BAR	_	_	_	4327-M	_	<u></u>	5727-M	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING		
OIL TEMPERATURE	60°-170° C			_	4348-M		_	5748-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.		
PYROMETER KIT (EC	GT) 0°-900° C	4344-M	_	_	_	5744-M	_		INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.		
WATER TEMPERATU				_	4337-M	_	_	5737-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.		
WATER TEMPERATU	JRE 60°-140° C	_	_	4431-M	_	_	_	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.		

HI-DEE™		Ø	BA			V <i>=</i> /=	$\nearrow$	
LED LIGI		FULL SWEEP MECH.	SWEEP	SWEEP	SWEEP			
GAUGES	RANGE	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	
BOOST/VACUUM	60 CM./HG-2.0 BAR		6103-M			5903-M		MECHANICAL GAU

BOOST/VACUUM 60 CM./HG-2.0 BAR   —		6103-M			5903-M —		MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T-FITTING		
OIL PRESSURE	0-7 BAR	_	_	6127-M	-	-	5927-M	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTINGS.	
OIL TEMPERATURE	60°-170° C	_	_	6148-M			5948-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.	
PYROMETER KIT (EGT) 0°-900° C		6144-M	_	_	5944-M	_		INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING.	
WATER TEMPERATURE	40°-120° C	_	_	6137-M	1-	-	5937-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.	

INFO



## SPORT-COMP



# Tachometers





#### SPORT-COMP IN-DASH TACH/SPEEDO COMBO



# Speedometers

ULTRA-LITE
IN-DASH SPEEDOMETER/
ELECTRIC



COBALT IN-DASH SPEEDOMETER/ ELECTRIC



#### احتارات

SPORT-COMP FUEL LEVEL PROGRAMMABLE



## Instruments

### احتارات


ULTRA-LITE VOLTMETER



## احازوال

COBALT WATER TEMPERATURE





		SPORT- COMP	ULTRA- LITE	COBALT	
GAUGES	RANGE	21/16"	21/16"	21/16"	INFO
BOOST PRESSURE	5-60 PSI	6370*	6570 †	6970	INCLUDES 1/8" NPT SENDER, RECOMMENDED FOR DIESEL ONLY
BOOST/VACUUM	30 IN. HG/30 PSI	6359*	6559†	6959	INCLUDES MAP SENSOR AND UNIVERSALT-FITTING, RECOMMENDED FOR GAS ENGINES
EGT/PYROMETER	0°-2000° F	6345*	6545 †	6945	INCLUDES PROBE WITH 1/8" NPT, WELD-IN FITTING AND HOSE CLAMP MOUNTING OPTIONS, 10" WIRE
FUEL LEVEL PROGRAMMABLE	0 Ω-280 Ω	6310*	6510 †	6910	7 PRE-SETS FOR MOST COMMON FACTORY SENDERS PLUS UNIVERSAL PROGRAMMABLE MODE
FUEL PRESSURE	5-100 PSI	6363*	6563 †	6963	INCLUDES 1/8" NPT SENDER, 8' WIRE HARNESS
NITROUS PRESSURE	0-1600 PSI	6374*	6574†	6974	INCLUDES 1/8" NPT SENDER, 8" WIRE HARNESS
OIL PRESSURE	5-100 PSI	6327*	6527 †	6927	INCLUDES 1/8" NPT SENDER AND 1/4" NPT ADAPTER, 8' SENDER WIRE
OIL TEMPERATURE	0°-340° F	6348*	6548 †	6948	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8" WIRE HARNESS
TRANSMISSION TEMPERATURE	0°-340° F	6349*	6549 †	6949	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8' WIRE HARNESS
VOLTMETER	8-18 VOLTS	6393*	6593 †	6993	INCLUDES 8' WIRE HARNESS
WATER TEMPERATURE	0°-340° F	6337*	6537 †	6937	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8" WIRE HARNESS
FIVE GAUGE KITS (3 3/8" SPEEDO)		6300*	6500 †	6900	INCLUDES SPEEDOMETER, OIL PRESS, WATER TEMP, FUEL LEVEL, VOLTMETER & REQUIRED SENSORS

PEDESTAL MOUNT TACHOMETER		OPERATES ON MOST 2, 3, 4, 5, 6, 8, AND 10 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT- COMP	ULTRA- LITE	COBALT
RANGE	DESCRIPTION	INFO	33/4"	3¾"	3¾"
10,000 RPM	PEDESTAL	DIGITAL TACHOMETER WITH EZ VIEW DISPLAY AND AMBER LED SHIFT LIGHT	6399*	6599 <b>†</b>	6999

IN-DASH TACHOMETER		OPERATES ON MOST 2, 3, 4, 5, 6, 8, AND 10 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT- COMP	ULTRA- LITE	COBALT
RANGE	DESCRIPTION	INFO	33/8"	3¾"	33/8"
10,000 RPM	IN-DASH	DIGITAL TACHOMETER WITH EZ VIEW DISPLAY AND OUTPUT FOR OPTIONAL AMBER LED SHIFT LIGHT	6397*	6597 <b>†</b>	6997

IN-DASH SPEEDOMETER		PROGRAMMABLE ELEC. WORKS WITH MOST VEHICLE SPEED SENSORS. SENDERS AVAILABLE	SPORT- COMP	ULTRA- LITE	COBALT
RANGE	DESCRIPTION	INFO	33/8"	3¾"	33/8"
260 MPH	IN-DASH	PROGRAMMABLE WITH EZ CAL SYSTEM. MPH OR KM/H. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	6388*	6588 †	6988

IN-DA SPEEDOMET		TACHOMETER OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS. SPEEDOMETER OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT- COMP	ULTRA- LITE	COBALT
RANGE	DESCRIPTION	INFO	3¾"	3¾"	33/8"
260 MPH/10,000 RPM	IN-DASH	COMBINATION INSTRUMENT FEATURING DIGITAL TACH AND PROGRAMMABLE SPEEDO.	6387*	6587 <b>†</b>	6987

<sup>\*</sup> Matches ES & Z-Series gauges

<sup>†</sup> Matches Ultra-Lite & Ultra-Lite II gauges

# AMERICAN™ MUSCLE





Features Through the Dial White LED Lighting with Lighted Pointer
American Muscle Gauges Come With a Flat Lens
KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



The fastest growing Series in the Auto Meter line, American Muscle dominates the dashboard with styling ripped straight from Detroit steel and powered by the best in modern internals and technology. With the lights off, these gauges blend perfectly into any interior from the golden age of the Big Three. When night falls, Auto Meter's cutting edge Hi Def LED lighting proves that great form is defined by dedication to function. A spun metal dial and a bright chrome bezel set off a look that could make the perfection in your dash rival what's under the hood.






# **AMERICAN**<sup>™</sup> MUSCLE

See Pages 88-89 for the complete gauge series offering

## KIGS



## Speedometers & Tachometers

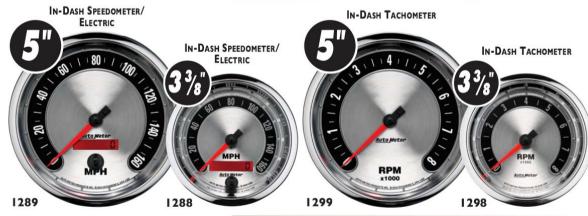

## Combos & Instruments









Features Through the Dial White LED Lighting with Lighted Pointer
Prestige Series Gauges Come With a Domed Lens
KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



Traditionally styled, with metal dial accents and an exclusive white LED lit pointer, Prestige Black Diamond captures the look of the era that defined meticulous, no compromise styling. Instantly take any build upscale with high end craftsmanship coupled with the latest in instrument technology. Form and function are held in perfect balance; a striking design and unmatched night-time visibility paired with race proven accuracy and durability to create the ultimate centerpiece for your dash. Prestige shows the world this definitely isn't your first build.











See Pages 88-89 for the complete gauge series offering

## KIRS

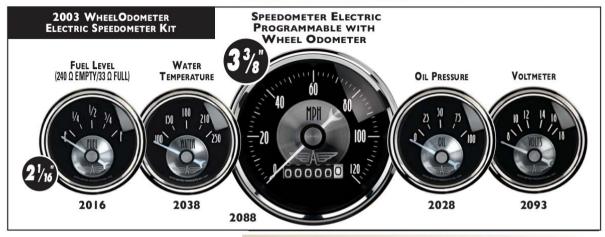

## Speedometers & Tachometers



IN-DASH SPEEDOMETER/





## Combos & Instruments









# Features Full Dial Face LED Lighting Prestige Series Gauges Come With a Domed Lens KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION




A parchment backdrop yields a spun metal dial with period correct styling, recalling an era of distinct design and unapologetic luxury. LED lighting across the entire face is reminiscent of the warm glow of a tube radio. Stylish, yet functional, visibility is clear and precise under all conditions. Underneath the sophisticated skin lies the soul of a race car, with accuracy and durability designed to stand up to the the most powerful engines in the world. Prestige Antique lvory's show-stopping good looks are just the beginning of the story.

### KIGG 2000 ELECTRIC PROGRAMMABLE SPEEDOMETER ELECTRIC SPEEDOMETER W LCD ODOMETER KIT PROGRAMMABLE WATER FUEL LEVEL (240 Ω EMPTY/33 Ω FULL) OIL PRESSURE VOLTMETER TEMPERATURE 2017 2037 2027 2092 2087



KIGG

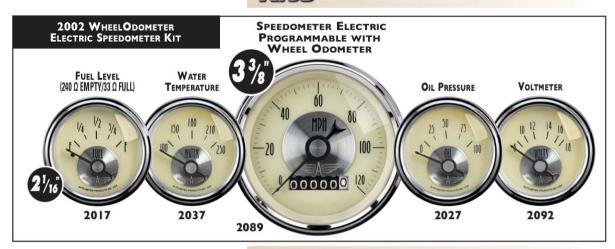

### Speedometers & Tachometers



IN-DASH SPEEDOMETER/





### Combos & Instruments









Features Full Dial Face LED Lighting
Prestige Series Gauges Come With a Domed Lens
KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION




Stark white, high contrast, and striking pure white LED illumination define the look of Prestige Pearl. A white dial adds style and class to the dash of any vehicle while retaining excellent readability, no matter the circumstance. Particularly captivating set against detailed metalworking or dark interiors, these instruments transform the look of your cockpit and provide a focal point for anyone lucky enough to get behind the wheel. A bright chrome bezel and curved lens complete the look, while race derived technology behind the scenes ensure the in utmost in performance and reliability.

# 2006 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT PROGRAMMABLE SPEEDOMETER ELECTRIC PROGRAMMABLE OIL PRESSURE VOLTMETER 21/16 2018 2039 2084




See Pages 88-89 for the complete gauge series offering


### KIGS

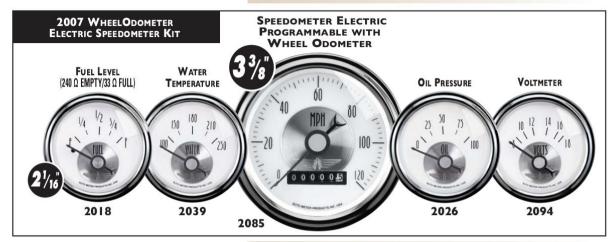

### Speedometers & Tachometers



IN-DASH SPEEDOMETER/





### Combos & Instruments



Cruiser





### Features Through the Dial White LED Lighting with Lighted Pointer Cruiser Gauges Come With a Flat Lens

KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



A sophisticated pairing of beige & black highlighted by subtle aluminum accents & chrome bezels, Cruiser echoes vintage style while providing modern accommodations for function. A unique hybrid dial design featuring through-the-dial LED illumination & high contrast orange lit pointers ensures unrivaled visibility day or night. Built to the same specs as Auto Meter's racing instruments, these gauges are durable companions no matter how long the cruise.








See Pages 88-89 for the complete gauge series offering

### Kits

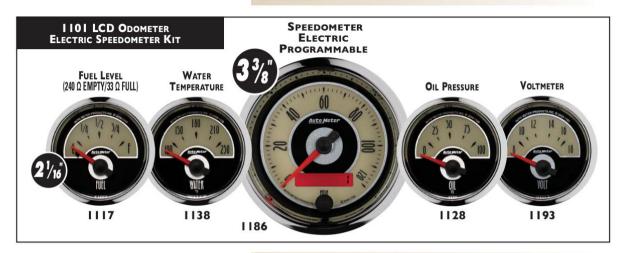


### Speedometers & Tachometers





# Cruiser AD





Features Through the Dial White LED Lighting with Lighted Pointer Cruiser AD Gauges Come With a Domed Lens

KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION




Peerless in design, Cruiser AD's striking Art Deco inspired aesthetics add elegance and refinement to any interior. Vivid white LED backlighting and a white lit pointer make them as easy to read as they are to look at. Crowned by a scalloped chrome bezel and domed lens, this evocative reinterpretation of the original looks period correct while providing award winning levels of accuracy and reliability.




# Cruiser AD

See Pages 88-89 for the complete gauge series offering

### KIGS

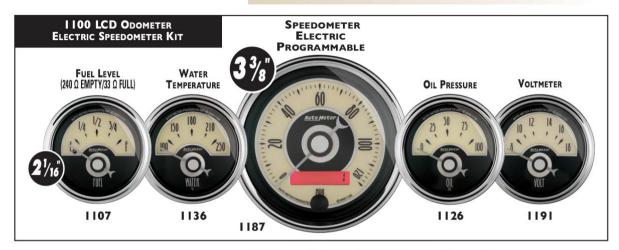

### Speedometers & Tachometers

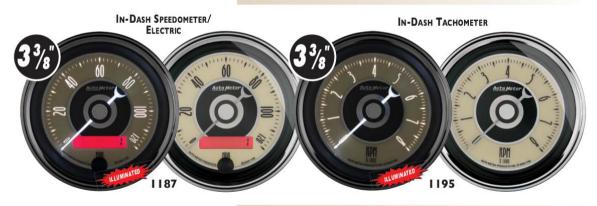

### Instruments



#### Short Sweep Electric



### **Designer Black II**™

Features Through the Dial White LED Lighting with Lighted Pointer Designer Black II Gauges Come with a Domed Lens


See Pages 88-89 for the complete gauge series offering






### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



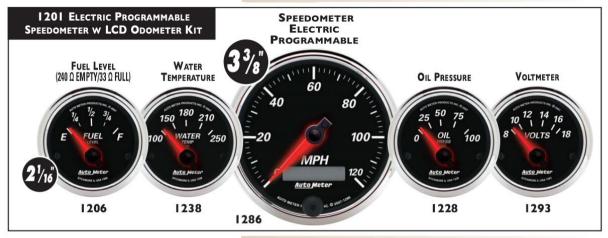

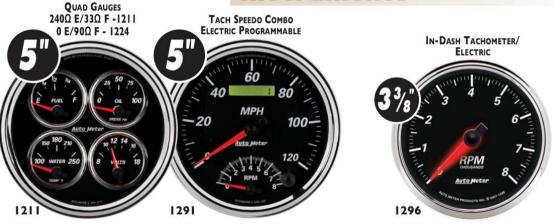








### Old Tyme White II™


Features White LED Full Dial Lighting Old Tyme White II Gauges Come With a Domed Lens

See Pages 88-89 for the complete gauge series offering

### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION

### KIGS

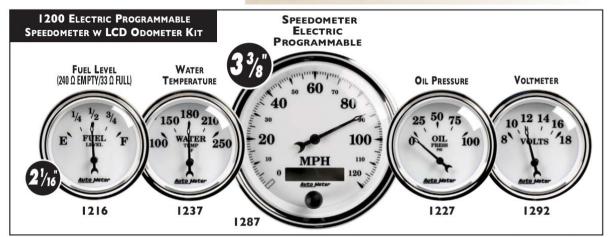

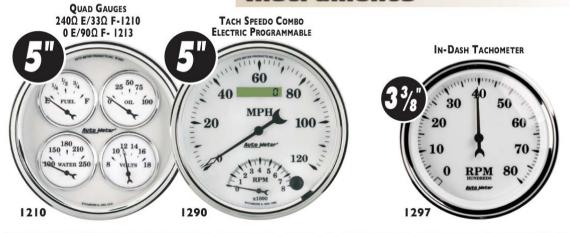



### **Arctic White**<sup>™</sup>


Arctic White Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering



### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION

### Kites

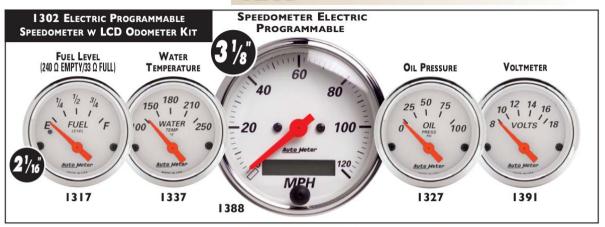


### Speedometers & Tachometers







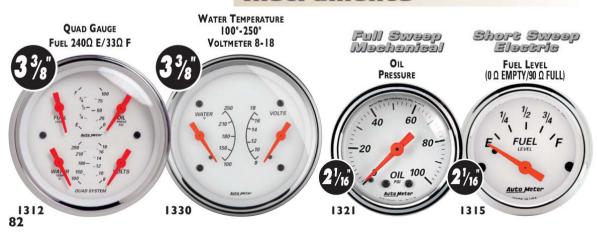




### **Designer Black**™

Designer Black Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering


### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION

### Kits

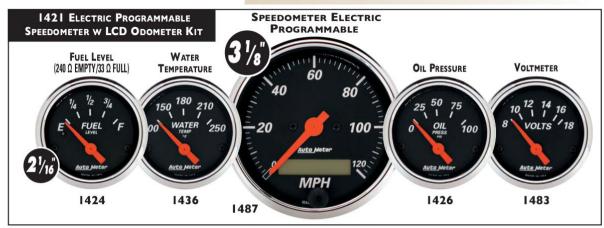


### Speedometers & Tachometers

# 





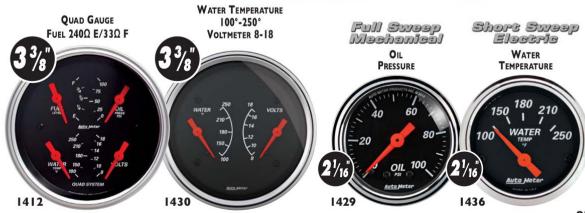


# ARTIQUE DEIGE Antique Beige Gauges Come With a Domed Lens

GO TO OUR
WEBSITE TO SEE
OUR FULL LINE
OF HIGH PERFORMANCE
INSTRUMENTS

See Pages 90-91 for the complete gauge series offering

### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION


### KIES

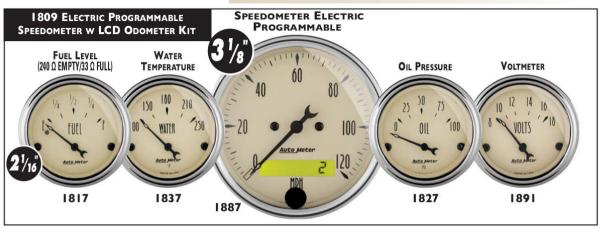


### Speedometers & Tachometers












### Old Tyme White™

Old Tyme White Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering


#### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION

### Kies

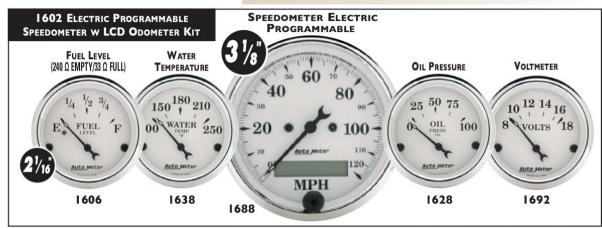

### Speedometers & Tachometers



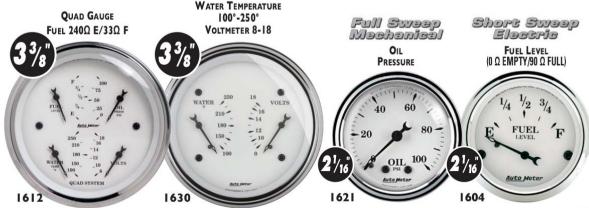

# Old Tyme Black™


Old Tyme Black Gauges Come With a Domed Lens


See Pages 90-91 for the complete gauge series offering



### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



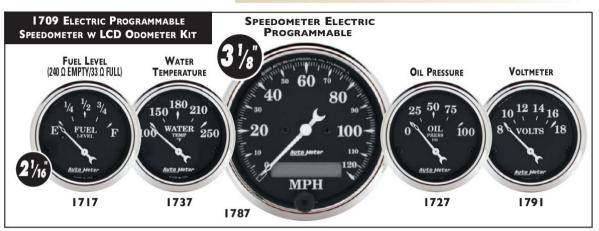

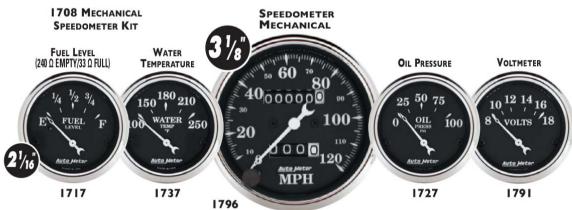

# GOLDEN OLDIES

1506

1538

1588

#### 1502 ELECTRIC PROGRAMMABLE Golden Oldies Gauges Come With a Domed Lens SPEEDOMETER ELECTRIC **PROGRAMMABLE** SPEEDOMETER W LCD ODOMETER KIT FUEL LEVEL WATER (240 Ω EMPTY/33 Ω FULL) TEMPERATURE OIL PRESSURE VOLTMETER 210 150 25 10 VOLTS

1528

1592

KIGS




# GOLDEN OLDIES


Golden Oldies Gauges Come With a Domed Lens


See Pages 90-91 for the complete gauge series offering

### KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION



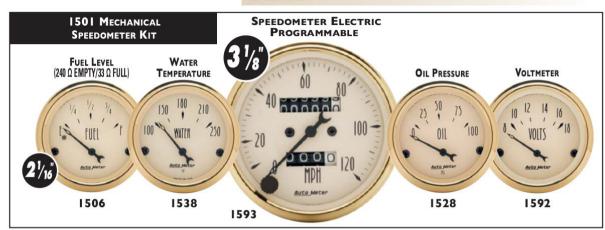

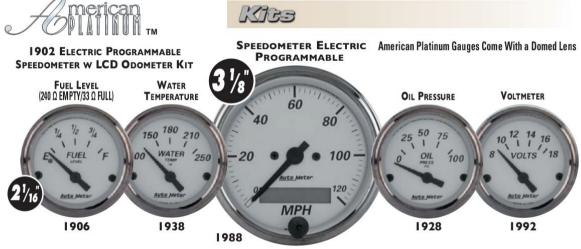

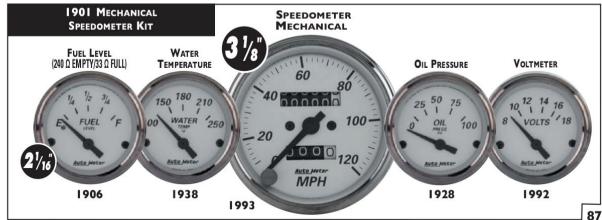



HI-DEF TO LED LIGHTING	AMERICAN MUSCLE	CRUISER	CRUISER AD	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUEI VORY	PRESTIGE PEARL	OLD TYME	DESIGNER BLACK II	* INCLUDES ALL SENSORS
3 3/8" 5 PIECE KIT									
120 MPH ELECTRIC SPEEDOMETER (LCD 000 METER) OIL PRESSURE, WATER TEMPERATURE, VOLTMETER, AND FUEL LEVEL	1202	1101	1100	2001	2000	2006	1200	1201	INCLUDES 33/8°: ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER. 2 1/16°: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. *
3 3/8" 5 PIECE KIT									
120 MPH ELECTRIC SPEEDOMETER (WHEEL ODOMETER) OIL PRESSURE, WATER TEMPERATURE, VOLTMETER, AND FUEL LEVEL	_	_	_:	2003	2002	2007	_	_	INCLUDES 338'S ELECTRIC PROGRAMMABLE SPEEDDMETER WITH LCO DODMETER. 2 1/16' 100°-250° F WATER TEMP, 0-100 PSI DIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. ★
5" QUAD GAUGE & TACH SPEEDO COMBO  QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE 8-18 VOLTMETER, 240 Ω E · 33 Ω F FUEL LEVEL TACH SPEEDO COMB 0: 0-120 SPEEDOMETER 0-8,000 RPM TACHOMETER			-	2005	2004	2008	1203	1204	INCLUDES QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL. TACH SPEEDO COMBO: 0-120 SPEEDOMETER, 0-8,000 RPM TACHOMETER. ★
2 <sup>1</sup> /16" SHORT SWEEP ELECTRIC	1								INFO
FUEL LEVEL (0 $\Omega$ EMPTY/90 $\Omega$ FULL)	1214	1113	1104	2014	2013	2015	_	_	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)	1218	12	0	(2	2_2	72_2	10_0	10_00	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)	1215	1115	1105	_		-	_	_	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 $\Omega$ EMPTY/33 $\Omega$ FULL)	1217	1117	1107	2016	2017	2018	1216	1206	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262
OIL PRESSURE 0-100 PSI	1226	1128	1126	2028	2027	2026	1227	1228	OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE 140°-300° F	1248	_	_	_	_	_	_	_	
TRANS TEMPERATURE 100°-250° F VOLTMETER 8-18 VOLTS	1249	1193	1191	2093	2092	2094	1292	1293	
WATER TEMPERATURE 100°-250° F			1136		2032		1237	1238	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
	I			2000	. 2007	. 2000			The second is a second with a second control of the second design of the second
2 <sup>1</sup> / <sub>16</sub> " DIGITAL STEPPER MOTOR									INFO
CLOCK-ANALOG	1284	1185	1184		_	-	_	1285	12 HOUR. DIGITAL STEPPER MOTOR MOVEMENT
BOOST/VACUUM 30 IN HG./15 PSI BOOST/VACUUM 30 IN HG./30 PSI	1258 1259	_		_	_	_	_	_	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS
FUEL LEVEL PROGRAMMABLE (0 Ω 280 Ω)	1209	1109	1108	200					7 SENSOR PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
OIL PRESSURE 0-100 PSI	1253	1153	1152	_	_	_	_	_	7 SENSON THE SETOTESO A SHIVETISHET HOSHAMMADEL SETTING
OIL TEMPERATURE 140°-280° F		_	_	_	-	-	-	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS.
TRANS TEMPERATURE 100°-260° F	1257	-	_	7-2	7—	7-	_	_	
VOLTMETER 8-18 VOLTS	1282	1183	1182	_	_	_	_	-	INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE 100°-260° F	1255	l 1155	1154	_	_	_	_	- 1	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8'HARNESS
2 <sup>1</sup> / <sub>16</sub> " FULL SWEEP MECHANICAL									INFO
OIL PRESSURE 0-100 PSI	1219	_	_	2022	2021	2023	<u> </u>	_	INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
WATER TEMPERATURE 120°-240° F	1232	_	_	2033	2032	2031	_	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.





HI-DEF™ LED LIGHTING KITS	AMERICAN MUSCLE	CRUISER	CRUISER AD	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL	OLD TYME WHITE II	DESIGNER BLACK II	INFO
SPEEDOMETER ELECTRIC (PROGRAMMABLE)	_	1186	1187	2086	2087	2084	1287	1286	
3 3/8" IN-DASH (LCD ODOMETER) 0-120 MPH	85.55	1100	1107	2000	2007	2001	1207	1200	PROGRAMMABLE SPEEDOMETERS WORK OFF MOST FACTORY VEHICLE
3 3/8" IN-DASH (LCD ODOMETER) 0-160 MPH	1288	_	-	-	-	_	_	_	SPEED SENSORS, MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME
3 3/8" IN-DASH (LCD ODOMETER) 0-250 KMH	1288-M	_	-		-	_	-		CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.
3 3/8" IN-DASH (WHEEL ODOMETER) 0-120 MPH	_	_	_	2088	2089	2085	_	_	
5" IN-DASH (LCD ODOMETER) 0-160 MPH	1289	-	-			_	_	-	
TACHOMETER	OPERA MOST	ATE ON M POINTS, S	OST 4, 6, STANDAF	AND 8 CY RD, AND P	'LINDER EI ERFORMA	NGINES. CO	OMPATIBL RONIC IGN	E WITH NITIONS	INFO
3 3/8" IN-DASH 0-8,000 RPM	1298	1196	1195	2096	2097	2098	1297	1296	FOR IN-DASH MOUNTING INTO A 3 3/8" DIAMETER HOLE
5" IN-DASH 0-8,000 RPM	1299	_	_	_	_	_	_	_	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
TACH SPEEDO COMBO (REQUIRES A SPEED SENSOR)					'LINDER EI ERFORMA				INFO
5" 0-120 SPEEDOMETER 0-8,000 RPM TACHOMETE	1295	_	-	2091	2090	2095	1290	1291	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
QUAD GAUGE									INFO
5" 240 E - 33 $\Omega$ 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATUR 8-18 VOLTMETE 240 $\Omega$ E - 33 $\Omega$ F Fuel Leve	1212			2011	2010	2019	1210	1211	INCLUDES 1/8" NPT PRESSURE & 1/8" NPT TEMPERATURE SENSOR (MODEL 3262 FUEL LEVEL SENSOR NOT INCLUDED)
5" 0 E - 90 $\Omega$ 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATUR 8-18 VOLTMETE 0 $\Omega$ E - 90 $\Omega$ F FUEL LEVE	1225	_	_	2012	2009	2020	1213	1224	INCLUDES 1/8" NPT PRESSURE & 1/8" NPT TEMPERATURE SENSOR (REQUIRES GM-STYLE 0-90Ω FUEL LEVEL SENSOR NOT INCLUDED)





PERIMETER LIGHTING	ARCTIC WHITE	DESIGNE	ANITQUE BEIGE	OLD TYME WHITE	OLD TYME BLACK	GOLDEN	AMERICAN PLATINUM	* INCLUDES ALL SENSORS † Includes 10Hz antenna. Displays time /date, odometer trip, coordinates, heading, compass, and peak speed recall.
KITS	_	70					>Z	INFO
3 1/8" 5 PIECE ELECTRIC SPEEDO KIT 120 MPH PROGRAMMABLE SPEEDOMETER (LCD ODOMETER)	1302	1421	1809	1602	1709	1502	1902	INCLUDES 3 1/8: ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER. 2 1/16: 100°-250° F WATER TEMP, 0-100 PSI DIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. ★
3 1/8" 5 PIECE ELECTRIC SPEEDO KPH KIT 190 KPH PROGRAMMABLE SPEEDOMETER (LCD ODOMETER)	1302-M	1421-M	1809-M	1602-M	1	_	_	INCLUDES 3 1/8: ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER. 2 1/16: 100°-250° F WATER TEMP, 0-100 PSI DIL PRESS, 240 $\Omega$ E - 33 $\Omega$ FUEL LEVEL, AND 8-18 VOLTMETER. *
3 1/8" 5 PIECE MECHANICAL SPEEDO KIT								INCLUDES 3 1/8": MECHANICAL SPEEDOMETER WITH WHEEL ODOMETER.
120 MPH MECHANICAL SPEEDOMETER (WHEEL ODOMETER)	1300	1420	1808	1601	1708	1501	1901	2 1/16: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 $\Omega$ E - 33 $\Omega$ FUEL LEVEL, AND 8-18 VOLTMETER. *
3 1/8" 5 PIECE TRADITIONAL KIT 120 MPH MECHANICAL SPEEDOMETER (WHEEL ODOMETER)	1311	1411	1811	1611	_	_	_	INCLUDES 3 1/8': MECHANICAL SPEEDOMETER WITH WHEEL ODOMETER. 2 1/16': FULL SWEEP MECHANICAL 120°-240° F WATER TEMP, FULL SWEEP MECHANICAL 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. ★
3 3/8" 5 PIECE ELECTRIC SPEEDO KIT								INCLUDES 33/8": PROGRAMMABLE SPEEDOMETER WITH WHEEL ODOMETER.
120 MPH PROGRAMMABLE SPEEDOMETER (WHEEL ODOMETER)	1340	1440	1840	1640	1740	_	_	2 1/16": FULL SWEEP 100"-250" F WATER TEMP, FULL SWEEP 0-100 PSI OIL PRESS, 240 $\Omega$ E - 33 $\Omega$ FUEL LEVEL, AND 8-18 VOLTMETER. *
3 3/8" 5 PIECE ELECTRIC GPS SPEEDO KIT								INCLUDES 3 3/8": GPS SPEEDOMETER WITH LED ODOMETER.
120 MPH GPS PROGRAMMABLE SPEEDOMETER (LED ODOMETER)	1350	1450	1850	1650	1750	_	_	2 1/16': 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 $\Omega$ E - 33 $\Omega$ Fuel Level, and 8-18 voltmeter. * $t$
3 3/8" QUAD GAUGE & TACH/SPEEDO COMBO KIT	1309	1409	1820	1620	1720	_	_	INCLUDES QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL.★ TACH: 0-8,000 SPEEDO: 0-120 PROGRAMMABLE SPEEDO.
3 3/8" QUAD GAUGE & SPEEDO KIT	-	_	_	-:	1700	-	_	INCLUDES QUAD GAUGE: 0-100 PSI OIL PRESSURE
5" QUAD GAUGE & SPEEDO KIT	1303	1403	1803	1603	1703	_	_	100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL.★ SPEEDO: 0-120 PROGRAMMABLE SPEEDO.
CALLOTS								

GAUGES								
2 <sup>1</sup> /16" SHORT SWEEP ELECTRIC								INFO
FUEL LEVEL (0 Ω EMPTY/30 Ω FULL)	1318	1425	1818	1607	1718	1507	1907	WORKS WITH MOST PRE 1965 CHEVY/GM SENDERS
FUEL LEVEL (0 $\Omega$ EMPTY/90 $\Omega$ FULL)	1315	1422	1815	1604	1715	1504	1904	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (73 $\Omega$ EMPTY/10 $\Omega$ FULL)	1316	1423	1816	1605	1716	1505	1905	WORKS WITH MOST PRE-1989 (PRE '87 MUSTANG) FORD AND MOST CHRYSLER
FUEL LEVEL (240 $\Omega$ EMPTY/33 $\Omega$ FULL)	1317	1424	1817	1606	1717	1506	1906	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
OIL PRESSURE 0-100 PS	1327	1426	1827	1628	1727	1528	1928	OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
PRNDL+ GEAR SHIFT INDICATOR GAUGE	1360	1460	1860		_	_	_	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
VOLTMETER 8-18 VOLTS	1391	1483	1891	1692	1791	1592	1992	
WATER TEMPERATURE 100°-250° F	1337	1436	1837	1638	1737	1538	1938	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
2 <sup>1</sup> /16" ANALOG								INFO
CLOCK	1385	1484	1885	1686	1785	1586	1986	QUARTZ MOVEMENT WITH SECOND HAND
21/16" FULL SWEEP MECHANICAL								INFO
BOOST/VACUUM 30 IN HG./20 PSI	1372	1471	_		_	_	_	INCLUDES 10' NYLON TUBING, AND UNIVERSAL T-FITTING
OIL PRESSURE 0-100 PSI	1321	1429	1821	1621	1721	_	_	INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
WATER TEMPERATURE 120°-240° F	1332	1432	1832	1632	1733	_	_	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.





PERIMETER LIGHTING	ARCTIC WHITE	DESIGNER BLACK	ANITQUE BEIGE	OLD TYME WHITE	OLD TYME BLACK	GOLDEN	AMERICAN PLATINUM	INFO
$3^3/8$ " DUAL GAUGES  FUEL LEVEL 240 $\Omega$ EMPTY/33 $\Omega$ FULL OIL PRESSURE 0-100 PSI	1313	1413	1813	1613	-		_	WORKS WITH 240/33 OHM FUEL SENDER 3262 (NOT INCLUDED). INCLUDES 1,8" NPT OIL PRESSURE SENDER.
FUEL LEVEL 0 $\Omega$ EMPTY/90 $\Omega$ FULL OIL PRESSURE 0-100 PSI	1324	1434	1824	1624	_	_		WORKS WITH 0/90 OHM GM FUEL SENDER (NOT INCLUDED). INCLUDES 1/8" NPT OIL PRESSURE SENDER.
WATER TEMPERATURE 100°-250° F VOLTMETER 8-18 VOLTS	1330	1430	1830	1630	<u></u>		-	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
SPEEDOMETER ELECTRIC (PROGRAMMABLE)								INFO
3 1/8" IN-DASH (LCD ODOMETER) 0-120 MPH	1388	1487	1887	1688	1787	1588	1988	
3 1/8" IN-DASH (LCD ODOMETER) 0-190 KPH	1388-M	1487-M	1887-M	1688-M	_	_	_	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS.
3 3/8" IN-DASH (LCD ODOMETER) 0-120 MPH	1380	1480	1880	1680	1780	_	_	MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289. DIGITAL ODOMETER MODELS INCLUDE TWO TRIP METERS.
3 3/8" IN-DASH (WHEEL ODOMETER) 0-120	1379	1479	1879	1679	1779	1-	1	COMPATIBLE WITH 6P3 MODULE 3289. DIGITAL ODOMETER MODELS INCLUDE TWO TRIP METERS.
3 3/8" IN-DASH (GPS) 0-120	1349	1449	1849	1649	1749	_	_	GPS SPEEDOMETER INCLUDES 10HZ ANTENNA, DISPLAYS TIME /DATE, ODOMETER TRIP, COORDINATES, HEADING, COMPASS, AND PEAK SPEED RECALL
5" IN-DASH (LCD ODOMETER) 0-160 MPH	1389	1489	1889	1689	1789	_	_	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5299. DIGITAL ODOMETER MODELS INCLUDE TWO TRIP METERS.
SPEEDOMETER MECHANICAL								INFO
3 1/8" IN-DASH (WHEEL ODOMETER) 0-120	1396	1476	1896	1693	1796	1593	1993	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT.  SPEEDOMETER CABLE IS REQUIRED.
TACHOMETER						. COMPATIB		INFO
2 1/16" IN-DASH 0-7,000 RPM	1397	1477	1897	1694	1797	1594	1994	FOR IN-DASH MOUNTING
3 1/8" IN-DASH 0-7,000 RPM	1398	1478	1898	1695	1798	1595	1995	FOR IN-DASH MOUNTING
3 3/8" IN-DASH 0-8,000 RPM	1390	1490	1890	1690	1790			FOR IN-DASH MOUNTING INTO A 3 3/8" DIAMETER HOLE
5" IN-DASH 0-8,000 RPM	1399	1499	1899	1699	1799	_	_	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
TACH SPEEDO COMBO	OPERATI MOST PO	E ON MOST INTS, STAI	4, 6, AND 8 NDARD, AN	CYLINDE D PERFOR	R ENGINES MANCE ELE	COMPATIB	LE WITH SNITIONS	INFO
3 3/8" 0-120 SPEEDOMETER 0-8,000 RPM TACHOMETER	1381	1481	1881	1681	1781	-	-	PROGRAMMABLE SPEEDOMETERS WORK OFF MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289. INCLUDES 3 3/8":
QUAD GAUGE								INFO
3 3/8" QUAD GAUGE 240 E - 33 F	1312	1412	1812	1612	1713	_	_	QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE.
3 3/8" QUAD GAUGE 0 E - 90 F	1314	1414	1814	1614	1714	_		8-18 VOLTMETER, 0 Ω E - 90 Ω F & 240 Ω E - 33 Ω F FUEL LEVEL.
5" QUAD GAUGE 240 E - 33 F	1310	1410	1810	1610	1710	_	_	INCLUDES OIL AND WATER SENSORS.
5" QUAD GAUGE 0 E - 90 F	1319	1419	1819	1619	1719	-	_	(FUEL LEVEL SENSOR NOT INCLUDED)



### PRO-COMP PRO DASH DISPLAYS







DIMENSIONS 3.82" HEIGHT 7.48" WIDTH DEPTH

EPTH \* Glass (front) to case back - 1.5" \* Glass to back of connector - 2.125" \* Glass to back of harness elbow - 4.5"

Glass to back of narness elbow - 4.5

### **INCLUDES**

PROFESSIONAL MOTORSPORTS WIRE HARNESS



Precision Twin Terminal 300 F° Temperature Sensor (x2)




PRECISION SOLID STATE 150 PSI PRESSURE SENSOR



ACCESSORY
(SOLD SEPARATELY)
EXTERNAL LED SHIFT LIGHT

	STREET	RACE
RPM		\
SPEED	√	√
OIL PRESS		√
OIL TEMP		$\checkmark$
WATER TEMP	$\sqrt{}$	$\sqrt{}$
VOLTAGE	$\checkmark$	$\checkmark$
FUEL LEVEL PROGRAMMABLE	$\sqrt{}$	_
FUEL PRESS	OPTIONAL	SENSOR INCLUDED
INTERIOR SHIFT LIGHT		$\sqrt{}$
INTERIOR WARN LIGHT W/ MESSAGE DISPLAY		<b>√</b>
EXTERNAL WARNING LIGHT CAPABLE		$\sqrt{}$
EXTERNAL SHIFT LIGHT CAPABLE	√	$\checkmark$
ODOMETER AND TRIP	$\checkmark$	_
LOW FUEL WARN LIGHT		_
MULTIPLE RUN RECORDING	_	$\sqrt{}$
PLAYBACK RECORDING (15 RUNS OR 2 HRS)	-	<b>√</b>
# OF RECORDING CHANNELS	_	8

	0-8,000 RPM SINGLE RANGE	0-8,000 RPM DUAL RANGE	0-10,500 RPM DUAL RANGE	INFO
STREET	6001	6002	6003	INCLUDES PRO MOTORSPORTS WIRE HARNESS W/ MIL-SPEC & MINI SURE SEAL CONNECTORS, 1/8" NPT OIL TEMP, SOLID STATE OIL PRESS, WATER TEMP, SWITCH KIT, AND SPEED PULSE AMPLIFIER FUEL LEVEL SENSOR AND VEHICLE SPEED SENSOR FOR DISCUSTED AND SWITCH SEASON REQUIRE #5291. OR #5292. ALSO COMPATIBLE WITH GPS MODULE #5289.
RACE	6011	6012	6013	OFF-HIGHWAY USE ONLY. DOES NOT HAVE PROVISION FOR MONITORING FUEL LEVEL OR ODOMETER READINGS. INCLUDES PRO MOTORSPORTS WIRE HARNESS WI MIL-SPEC & MINI SURE SEAL CONNECTORS, 1/8" NPT OIL TEMP, SOLID STATE OIL PRESS & FUEL PRESS (CARB OR EFI), WATER TEMP. SWITCH KIT, AND SPEED PULSE AMPLIFIER. FUEL LEVEL SENSOR AND VEHICLE SPEED SENSOR NOT INCLUDED. CABLE DRIVE APPLICATIONS MAY REQUIRE #5291 OR #5292. ALSO COMPATIBLE WITH GPS MODULE #5289.



### Test Less. Guess Less. Spend Less. Win More.

In 1995, Auto Meter revolutionized drag racing with the introduction of the Ultimate Playback tachometer, which featured patented technology allowing users to record and compare up to 4 passes of engine RPM data recorded at 100 samples per second. These products provided essential and accessible, high resolution performance information to racers in a familiar and easy to use package.

In 2001, Auto Meter introduced Generation 3 Ultimate II tachometers, adding innovative Tach Facts Software and the ability to record and compare both engine and driveshaft RPM on either the tach itself or graphically on a PC.

Today, Auto Meter Playback Tachometers have helped racers fine tune and diagnose clutch and converter strategies, nail their shift points, and improve their launch consistency for nearly 20 years, but we are not content to rest on our laurels.

Meet the next generation of the legendary Ultimate tachometer line, **Ultimate III** and **Ultimate DL**, which place the power of more advanced Data Acquistion systems in an affordable, convenient, and compact package.

#### Ultimate III feature highlights include:

- -30% weight reduction from the previous Ultimate II tachometer design
- -High Accuracy, competition grade air core meter movement capable of matching the most powerful engines. Achieving 0 to 10,000 RPM in a mere 333 milliseconds!
- -4 stage shift light control
- -Availability in Black or Silver Dial faces of 9k and 11k RPM
- -Advanced LED backlighting for improved visibility, reduced electrical system draw, and resistance to vibration and tire shake.
- -New and improved ARMS (automatic recording memory start) system for worry free driver operation
- -Engine and driveshaft RPM recording at 100 samples per second with up to 60 seconds of available memory
- -Playback data right on the tach itself, or easily download it to award winning DataPro analysis software.
- -Backed by contingency in NHRA, IHRA, NMCA, and NMRA, a 1 year competition warranty, and Auto Meter's legendary customer service and race support team.

More advanced users should consider the Ultimate DL (DataLogger) which adds to your information arsenal by providing connections for, and ability to record Wideband Air/Fuel Ratio and Pressure channel data to the Ultimate III features above, which can help you diagnose fuel delivery issues, improve power tuning, and raise MPH in the traps. Also includes Onboard tri-axis accelerometer providing advanced data about vehicle acceleration and launch, working intelligently with DataPro software to pin point not only when, but where particular events occurred on the track!

Put simply, Ultimate III and Ultimate DL tachometers from Auto Meter provide all the essential tools needed to dial in your setup minus the complication or expense.

Working from a tight budget? Check out our Sport-Comp Playback tachometers. These instruments are the Saturday night racer's no-frills workhorse. Simple operation and data review view 3 button controls on the face couldn't be easier!

### **ULTIMATE DL** ULTIMATE III





ULTIMATE DL



FEATURES	SPORT-COMP™	ULTIMATE III	<b>ULTIMATE DL</b>
FOUR STAGE SHIFT LITE	√	√	√
COMPATIBLE W/ 1-12 CYL. ENGINES	√	√	√
SHORT SHIFT PROTECTION	√	√	√
FIRST GEAR DELAY	√	√	√
NUMBER OF RUNS	1	+4	+4
SAMPLE PER SECOND	50	100	100
RECORD TIME	UP TO 80 SECONDS	UP TO 60 SECONDS	UP TO 60 SECONDS
PC DOWNLOAD	_	$\checkmark$	√
DATAPRO SOFTWARE INCLUDED	_	<b>√</b>	√
DRIVESHAFT RPM	_	$\sqrt{}$	$\sqrt{}$
THREE AXIS G METER (+/- 6G)	_	_	√
LED BACKLIGHTING	_	√	√
PRESSURE CHANNEL	_	_	√
WIDEBAND AFR CHANNEL	_	_	<b>√</b>

#### 5" PLAYBACK TACHOMETERS Operates on most 1 through 12 cylinder engines and are compatible with most points, standard, and electronic ignitions **RANGE DIAL COLOR** INFO PART # 9,000 RPM SILVER 6882 ULTIVIATE III 9,000 RPM DUAL CHANNEL PLAYBACK RECORDS ENGINE AND DRIVESHAFT RPM.

ULTIMATE DL


	3,000 111 191	DEMOIL	507.2 0.77 111.22 1 2 11 2 10 11 2 11 2 11 2 11 2	0007
- 6	11,000 RPM	SILVER	INCLUDES DATA PRO SOFTWARE. OPTIONAL FOUR-STAGE SHIFT-LITE SEE ACCESSORIES SECTION.	6886
	11,000 RPM	BLACK		6888
	9,000 RPM	SILVER	DUAL CHANNEL PLAYBACK RECORDS ENGINE AND DRIVESHAFT RPM. OPTIONAL	6894
	9,000 RPM	BLACK	FOUR-STAGE SHIFT-LITE SEE ACCESSORIES SECTION, INCLUDES DATA PRO SOFTWARE,	6896
	11,000 RPM	SILVER	INTERNAL THREE AXIS G-METER, OPTIONAL PRESSURE AND WIDEBAND AFR CHANNEL.	6895
	11,000 RPM	BLACK	SENSORS SOLD SEPARATELY, SEE BELOW.	6897

SENSOR KITS	MODEL
WIDEBAND SENSOR KIT FOR ULTIMATE DL	9133
15 PSI SENSOR KIT (8' CABLE) FOR ULTIMATE DL	9134
100 PSI SENSOR KIT (8' CABLE) FOR ULTIMATE DL	9135



### DATAPRO SOFTWARE FOR

# ULTIMATE III & ULTIMATE

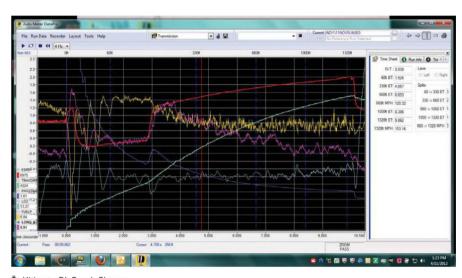

- ANALYZE WHEELSPIN, CLUTCH SLIP, CONVERTER LOCK UP, GEAR CHANGES AND MORE!
- SEE NOT ONLY WHAT HAPPENED DURING A PASS BUT ALSO WHEN AND WHERE!
- RUN COMPARISON FEATURE ALLOWS YOU TO REVIEW YOUR LAST RUN VS. YOUR BEST TO SEE WHERE TIME WAS GAINED OR LOST.
- LOG BOOK FEATURE KEEPS YOUR SETUP NOTES MATCHED WITH YOUR RUN DATA FOR EASY REFERENCE.
- COMPATIBLE WITH PC'S RUNNING WINDOWS XP, VISTA, 7, OR 8!
- LIGHTNING FAST USB DATA DOWNLOAD.
- INCLUDED WITH ULTIMATE III
   OR ULTIMATE DL TACHOMETERS.

### PLAYBACK TACHS

5"	PLAY	BACK	TACHO	METERS

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS

INFO

RANGE	SERIES	
9,000 RPM	SPORT-COMP™	
9,000 RPM	Silver™	FOUR
11,000 RPM	SPORT-COMP*	COMPAT
11,000 RPM	Silver™	

FOUR-STAGE SHIFT-LITE. SHIFT-LITE IS OPTIONAL. INCLUDES CONNECTOR COMPATABLE WITH QUICK-LITE, SUPER-LITE, & STANDARD INCANDESCENT LITE. SEE FEATURES ON PREVIOUS PAGE.

3967 3965

3964

**PART** # 3966

MODULE/PLAYBACK BOX PLAYBACK BOX ADDS LAUNCH LIGHT AND 4 STAGE SHIFT SETTINGS WHEN A SHIFT LIGHT IS ADDED 5314



TACHOMETER/PLAYBACK
3966



TACHOMETER/PLAYBACK
3964



TACHOMETER/PLAYBACK
3967




TACHOMETER/PLAYBACK



PLAYBACK BOX 5314

<sup>\*</sup> Ultimate DL Graph Shown.









### Instruments

Full Sweep Mechanical OIL PRESSURE

**TACHOMETERS** 

0-10.000 RPM

0-10,000 RPM

3 3/8" SHIFT-LITE

3 3/8" IN-DASH

Short Sweep Electric

TRANS. TEMPERATURE



880037

880038

Digital Stappar Motor

OIL PRESSURE

Short Sweep Electric VOLTMETER

18



**INFO** 

OPERATES WITH MOST 2-12 CYLINDER TACH SIGNALS

OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS

(() The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.

RANGE INSTRUMENT MODEL NUMBER 21/16" SHORT SWEEP ELECTRIC WHITE DIAL | BLACK DIAL INFO OIL PRESSURE 0-100 PSI 880029 880015 INCLUDES 1/8" NPT SENDER, AND 1/4" NPT ADAPTER TRANS. TEMPERATURE 100°-250° F 880019 INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS. 880033 VOLTMETER 8-18 VOLTS 880035 880021 WATER TEMPERATURE 100°-250° F 880030 880016 INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS. 21/16" DIGITAL STEPPER MOTOR **INFO** BOOST 0-30 PSI 880034 880020 INCLUDES MAP SENSOR & 8 FT. WIRE HARNESS **FUEL LEVEL PROGRAMMABLE** FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING  $(0 \Omega 280 \Omega)$ 880027 880013 PYROMETER KIT 0-1600° F 880031 880017 INCLUDES TYPE K THERMOCOUPLE & 8 FT. WIRE HARNESS WATER TEMPERATURE 100°-260° F INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS, 8 FT. WIRE HARNESS 880032 880018 21/16" FULL SWEEP MECHANICAL INFO BOOST 0-35 PSI 880026 880012 INCLUDES 10 FT. NYLON TUBING & T-FITTING BOOST/VACUUM 30 IN HG./20 PSI 880025 880011 INCLUDES 10 FT. NYLON TUBING & T-FITTING OIL PRESSURE 0-100 PSI 880028 880018 INCLUDES 10 FT. NYLON TUBING & T-FITTING, 1/8" AND 1/4" NPT FITTINGS. 33/8" SPEEDOMETER ELECTRIC (PROGRAMMABLE) INFO PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND IN-DASH (LCD ODOMETER) 0-160 MPH 880036 880022 5292 SENDERS AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.

INSTRUMENT	RANGE		SHORT SWEEP ELECTRIC	
2 <sup>5</sup> /8" DRAG PA	AK .	DIGITAL STEPPER MOTOR	WHITE DIAL	INFO
OIL PRESSURE (PEAK & WARN)	0-100 PSI	880249	-	INCLUDES 10 FT. NYLON TUBING & T-FITTING
OIL TEMP. (PEAK & WARN)	100°-340° F	880251	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS.
TRANS. TEMP. (PEAK & WARN)	100-260 PSI	880359	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS
VOLTMETER	8-18 VOLTS		880252	
WATER TEMP. (PEAK & WARN)	100°-260° F	880250	_	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS, 8 FT. WIRE HARNESS

880023

880024

**TACHOMETERS** WHITE DIAL 5" SHIFT-LITE 0-10,000 RPM 880248 OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS 5" SHIFT-LITE 0-10,000 RPM 880410 2002 & PRIOR VIPERS.

GO TO OUR WEBSITE TO SEE OF HIGH PERFORMANCE INSTRUMENTS

### **OFFICIAL LICENSED** PRODUCTS

HI-DEF™ LED LIGHTING















880075

FORD RACING 5" TACH

FORD RACING 3 3/8" TACH

FORD RACING 3 3/8" TACH

FORD RACING 3 3/8" ELEC SPEEDO

FORD RACING 2 1/16" **OIL PRESS** 

FORD RACING WATER TEMP

FORD 2 1/16" **FUEL** 

#### BLACK DIAL FACE, WHITE NUMBERS AND INCREMENTS, ORANGE POINTER, AND SILVER BEZEL. INSTRUMENT RANGE

2 <sup>1</sup> /16" SHORT SWEEP ELECTRIC		MODEL NUMBER	INFO
FUEL LEVEL	(73 $\Omega$ EMPTY/10 $\Omega$ FULL)	880075	FOR MOST PRE-1989 FORDS AND PRE-1987 MUSTANGS
OIL PRESSURE	0-100 PSI	880076	1/8" NPT SENSOR, 1/4" NPT ADAPTER
VOLTMETER	8-18 VOLTS	880081	
WATER TEMPERATURI	E 100°-250° F	880077	1/8" NPT SENSOR, 1/2' & 3/8' NPT ADAPTER

2 <sup>1</sup> /16" DIGITAL STEPPE	R MOTOR		INFO
BOOST/VACUUM	30 IN HG./30 PSI	880074	10' NYLON TUBING, MAP SENSOR, 8 FT. WIRING HARNESS
BRAKE PRESSURE	0-1600 PSI	880362	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
DIGITAL PERFORMANCE INFORMATION (	CENTER GAUGE	880089	0-60 TIME, 60-0 DIST, 1/4 MILE, HP, G'S, 8 FT. WIRING HARNESS
FUEL LEVEL PROGRAMMABLE	0 Ω/280 Ω	880400	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-15 PSI	880107	1/8" NPT SENSOR, 8 FT. WIRING HARNESS
FUEL PRESSURE	0-100 PSI	880080	1/8' NPT SENSOR, 8 FT. WIRING HARNESS
OIL PRESSURE	0-100 PSI	880085	1/8" NPT SENSOR, 1/4" NPT ADAPTER, 8 FT. WIRING HARNESS
OIL TEMPERATURE	140°-280° F	880079	8' HARNESS, 1/8' NPT SENSOR, 1/2' & 3/8' NPT ADAPTER
PYROMETER KIT	0-1600° F	880078	K-TYPE THERMOCOUPLE, 8 FT. WIRING HARNESS
TRANSMISSION TEMPERATURE	100°-260° F	880314	8' HARNESS, 1/8' NPT SENSOR, 1/2' & 3/8' NPT ADAPTER
WATER TEMPERATURE	100°-260° F	880086	8' HARNESS, 1/8' NPT SENSOR, 1/2' & 3/8' NPT ADAPTER

	21/16" FULL SWEEP MECHANICAL		INFO
BOOST	0-60 PSI	880106	10' NYLON TUBING

3 <sup>3</sup> /8" SPEEDOMETER ELECTRIC (PROGRAMMABLE)			INFO	
IN-DASH (LCD ODOMETER)	0-160 MPH	880082	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS.  MODEL 5292 SENDER AVAILABLE FOR SOME  CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	

TACHOMETERS		INFO
3 3/8" IN-DASH 0-10,000 RPM	880084	OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
3 3/8" SHIFT-LITE 0-10,000 RPM	880083	OPERATES WITH MOST 2-12 CYLINDER TACH SIGNALS
5" SHIFT-LITE 0-10,000 RPM	880281	COBRA JET SNAKE LOGO (SHOWN ABOVE). OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
5" SHIFT-LITE 0-10,000 RPM	880118	COBRA JET LOGO W/O SNAKE. OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
5" SHIFT-LITE 0-10,000 RPM	880487	12 LED SHIFT-LITE, OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS, (COBRA JET LOGO W/O SNAKE).

880353

# ASTERPIECE SILVER

880351







880087 LCD ODOMETER **ELECTRIC SPEEDOMETER KIT** 

INCLUDES ALL SENSORS 2 1/16"

25 50 12 14 BATTERY 880352 880354

880355

## **OFFICIAL LICENSED PRODUCTS**











5813-00406

3613-00406

5832-00407

5814-00407

		CHEVY	BOW-TIE
INSTRUMENT	RANGE	LED LIGHTING	PERIMETER LIGHTING
		BLACK DIAL	WHITE DIAL
SHORT SWEEP ELECTRIC		2 <sup>1</sup> /16"	<b>2</b> <sup>5</sup> /8"
FUEL LEVEL (0 Ω EMP	PTY/90 Ω FULL)	3613-00406	5814-00406
OIL PRESSURE	0-100 PSI	3627-00406	5827-00406
TRANS. TEMPERATURE 100°-250° F		3649-00406	3 <del>1 - 1</del> 3
VOLTMETER	8-18 VOLTS	3692-00406	5891-00406
WATER TEMPERATURE	100°-250° F	3637-00406	5837-00406

GM	PERFORMANCE	<b>PARTS</b>
	PERIMETER	
	LIGHTING	



WHITE DIAL	UCENSED PRODUCT 3699-00406
<b>2</b> <sup>5</sup> /8"	INFO
5814-00407	WORKS WITH MOST 1965 TO 1996 CHEVY/GM SENDERS
5827-00407	INCLUDES 1/8" NPT SENDER, AND 1/4" NPT ADAPTER
35 <del></del> 2	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
5891-00407	
5837-00407	INCLUDES 1/8" NPT SENDER 3/8" AND 1/2" NPT FITTINGS

DIGITAL STEP	PER MOTOR		
AIR FUEL RATIO (NON S	TEPPER MOTOR)	3675-00406	·—
BOOST/VACUUM	30 IN HG./30 PSI	3659-00406	_
FUEL PRESSURE	0-100 PSI	3663-00406	_
NITROUS	0-2000 PSI	3674-00406	_
OIL PRESSURE	0-100 PSI	3653-00406	
PYROMETER	0-1600° F	3644-00406	_
PYROMETER	0-2000° F	3645-00406	1-1
TRANS TEMPERATURE	100°-260° F	3657-00406	_
WATER TEMPERATURE	100°-260° F	3655-00406	1-1

	INFO
(X <u>—</u> 4)	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
<del>-</del>	INCLUDES MAP SENSOR, 8 FT. WIRE HARNESS & T-FITTING
	INCLUDES 8 FT HARNESS AND SENDER
<del>-</del>	REQUIRES -4 STAINLESS STEEL LINE. SEE ACCESSORIES. INCLUDES SENDER.
	INCLUDES 1/8" NPT SOLID STATE SENDER & 8 FT. WIRE HARNESS
_	INCLUDES TYPE K THERMO COUPLE & 8 FT. WIRE HARNESS
_	INCLUDES TYPE K THERMO COUPLE & 8 FT. WIRE HARNESS
<del>-</del>	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
V—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.

FULL SWEEP M	ECHANICAL		
BOOST	0-35 PSI	3604-00406	-
BOOST	0-60 PSI	3605-00406	_
BOOST/VACUUM	30 IN HG./20 PSI	3607-00406	_
BOOST/VACUUM	30 IN HG./30 PSI	3603-00406	
FUEL PRESSURE	0-15 PSI		5813-00406
FUEL PRESSURE	0-100 PSI	_	5812-00406
NITROUS	0-2000 PSI	_	5828-00406
OIL PRESSURE	0-100 PSI	3621-00406	5821-00406
WATER TEMPERATURE	120°-240° F	3632-00406	5832-00406

	INFO
× <del></del>	INCLUDES 10 FT. NYLON TUBING
_	INCLUDES 10 FT. NYLON TUBING
—	INCLUDES 10 FT. NYLON TUBING & T-FITTING
_	INCLUDES 10 FT. NYLON TUBING & T-FITTING
5813-00407	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
5812-00407	REQUIRES -4 STAINLESS STEEL LINE. SEE ACCESSORIES. EXTERIOR MOUNTING ONLY
5828-00407	REQUIRES -4 STAINLESS STEEL LINE. SEE ACCESSORIES.
5821-00407	INCLUDES 10 FT. NYLON TUBING & 1/4" NPT FITTING
5832-00407	INCLUDES 6 FT. CAPILLARY TUBING

INSTRUMENT	RANGE	CHEVY	BOW-TIE
SPEEDOMETER ELECTRIC		LED LIGHTING	PERIMETER LIGHTING
(i ROOKAIIIIIABEE)		BLACK DIAL	WHITE DIAL
3 3/8" IN-DASH (LCD ODOMETER)	0-160 MPH	3688-00406	8
5" IN-DASH (LCD ODOMETER)	0-160 MPH	_	5889-00406

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	INFO
WHITE DIAL	
1 1	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED
5889-00407	SENSORS. MODEL 5291 SENDER AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.

TACHOMETERS		
0-8,000 RPM	_	5780-00406
0-10,000 RPM	3697-00406	_
0-10,000 RPM	3690-00406	(2 <u>—1</u> 1)
0-10,000 RPM	_	5898-00406
0-10,000 RPM		5795-00406
0-10,000 RPM	3699-00406	5899-00406
	0-8,000 RPM 0-10,000 RPM 0-10,000 RPM 0-10,000 RPM 0-10,000 RPM	0-8,000 RPM

	INFO
5780-00407	FEATURES ADJUSTABLE REDLINE POINTER
_	FOR IN-DASH MOUNTING INTO A 33/8" DIAMETER HOLE
() <u>——</u> ()	INCLUDES EXTERNAL LED MINI QUICK LITE W/ AMBER LED
5898-00407	FOR IN-DASH MOUNTING
5795-00407	MEMORY RECALL TO HIGHEST RPM
5899-00407	SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE

# CHEVY VINTAGE

	KITS	PERIMETER LIGHTING
3 1/8"	5 PIECE 120 MPH ELECTRIC SPEEDO KIT	1302-00408
3 1/8"	5 PIECE 120 MPH MECHANICAL SPEEDO KIT	1300-00408
5"	QUAD GAUGE W 120 MPH SPEEDO KIT	1303-00408
	TACHOMETER	PERIMETER LIGHTING

7,000 RPM

1398-00408



3 1/8"



# CAMARO GAUGES

HI-DEF ™ Led lighting



### Tachometer

Auto Meter is proud to be the official licensed supplier for the performance gauge pack in the new COPO Camaro. Designed to commemorate the original Central Office Production Order (COPO) system used by dealers in 1969 to offer performance models that were designed to be the quickest in NHRA Stock Eliminator and Super Stock classes. The current generation of COPO Camaros, are limited production models specially designed for NHRA competition today.

When Chevrolet Performance decided to build the COPO Camaro they knew they couldn't trust just any instrument to track the vitals of the beast. So they contacted Auto Meter, manufacturer of the most trusted instruments in NHRA and NASCAR competition, to draw on our nearly 60 years of racing instrument experience for help putting together the ultimate NHRA-ready competition gauge pack.

The end result is what you see here. A unique instrument set that was designed to the Chevrolet Performance COPO team's exacting standards.

While we might not all be able to get our hands on one of the limited edition COPO Camaros, Auto Meter is pleased to be able to offer you the COPO Camaro Gauge Pack instruments separately to help complete your latest Chevrolet project.

### Instruments



#### PEDESTAL MOUNT TACHOMETERS

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	5"
10,000 RPM	SHIFT-LITE	SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE	880445

DIGITAL STEPPER SHORT SWEEP

		MOTOR	ELECTRIC	
GAUGES	RANGE	21/16"	21/16"	INFO
BRAKE PRESSURE	0-1600 PSI	880450	_	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	880449	-	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	880447	_	INCLUDES 1/8" NPT SENDER, 8' WIRING HARNESS & 1/4" NPT FITTING.
TRANSMISSION TEMPERATURE	100°-260° F	880448	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	_	880444	
WATER TEMPERATURE	100°-260° F	880446	_	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8" HARNESS

### **OFFICIAL LICENSED JEEP GAUGES**





87-95 JEEP KIT (YI) COMPLETE INSTRUMENT KIT



IN-DASH SPEEDOMETER/ MECHANICAL

IN-DASH TACHOMETER







Short Sweep Electric

### Instruments

OIL PRESSURE 880240





WATER

**TEMPERATURE** 880260

**TRANSMISSION** 


**IN-DASH TACHOMETERS** OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	33/8"
8,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	880246

**IN-DASH SPEEDOMETERS** RANGE DESCRIPTION 33/8" INFO PROGRAMMABLE SPEED OMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 160 MPH IN-DASH/ELECTRIC 880244 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289. 120 MPH IN-DASH/MECHANICAL MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED. 880245

		SHORT SWEEP ELECTRIC	
GAUGES	RANGE	21/16"	INFO
AXLE TEMPERATURE	100°-250° F	880431	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.
FUEL LEVEL	(73 $\Omega$ EMPTY/10 $\Omega$ FULL)	880428	WORKS WITH MOST 70'S TO 86 JEEP, PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	880243	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS AND 87-95 JEEP WRANGLER SENDER
OIL PRESSURE	0-100 PSI	880240	1/8" NPT SENDER AND1/4" NPT ADAPTER.
OIL TEMPERATURE	100°-250° F	880429	NAMES AND THE PROPERTY OF THE
TRANSFER CASE TEMPER	ATURE 100°-250° F	880430	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.
TRANSMISSION TEMPERA	ATURE 100°-250° F	880260	
VOLTMETER	8-18 VOLTS	880242	
WATER TEMPERATURE	100°-250° F	880241	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.

87-95 JEEP YJ KIT		
KIT	INFO	33/8" & 21/16"
3 3/8" ELECTRIC SPEEDO & TACHOMETER KIT 2 1/16" 5 PIECE GAUGE KIT	INCLUDES 33,8°: 160 MPH ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 8K TACHOMETER. 21/16°: 100°-250° FWATER TEMP, 0-100 PSI OIL PRESS, 0 $\Omega$ E - 90 $\Omega$ F FUEL LEVEL, AND 8-18 VOLTMETER. INCLUDES BOTH TEMP SENDERS & 0IL PSI SENDER. INCLUDES 3/8° & 1/2° NPT FITTINGS, AND WIRING HARNESS.	7040





ecometer<sup>™</sup> by Auto Meter is a fuel consumption eco-gauge that helps drivers visually monitor how their driving style impacts their vehicle's fuel consumption.

# INSTALLS INTO THE VEHICLE'S OBD PORT AND CAPTURES KEY ENGINE & VEHICLE PARAMETERS

I Cord, I Connection



- SIMPLE PLUG IN INSTALLATION
- NO DRILLING REQUIRED
- NO SPECIAL TOOLS REQUIRED
- E-Z VIEW MOUNT ALLOWS FOR OPTIMAL VISIBILITY AND ALIGNMENT
- TURNS ON AND OFF WITH YOUR VEHICLE

Displays Real-Time Fuel Economy
by Monitoring Key Engine
& Vehicle Parameters

Plug & Play, CAN
Based Instrument

RoHS
Compliant
Design

Multiple
Monitoring
Modes

F-Z Installation:

Custom-View<sup>TM</sup> Indexing Display for Ease of Installation & Optimal Viewing Angle

- Customizable to the specific vehicle's type (compact, full size, crossover/mini-van or truck/SUV)
- Uses proprietary software to calculate fuel economy performance (real time and/or average)
- Display real time fuel economy performance in both a radial energy consumption graph and in a precise, easy-to-read digital format
- Offers 4 different modes that can be easily selected by the driver at the touch of a button
- Instantaneous Fuel Economy, Average Fuel Economy, Digital Tachometer with Instantaneous Fuel Economy, Digital Speedometer with Instantaneous Fuel Economy

### **INSTANTANEOUS MPG MODE**

55 MPH ACCELERATING HARD ACCELERATING: HIGHWAY TO 65 MPH 70 MPH TO PASS



Radial Fuel Efficiency Graph

### **AVERAGE MPG MODE**

FULL SIZED VEHICLE WAITING AT IN CITY DRIVING A STOP LIGHT



Radial Fuel Efficiency Graph Shows 0 MPG - Low Efficiency

	FULL SWEEP ELECTRIC	
GAUGES	21/16"	INFO
ECOMETER	9105	MOST 1996 & NEWER GASOLINE POWERED VEHICLES. NOT COMPATIBLE WITH DIESEL, GAS/ ELECTRIC OR CHRYSLER MDS.





#### SHIFT-LITE TACHOMETER

### Tachometers







### Short Sweep Mechanical

OIL PRESSURE



# Instruments



### Full Sweep Mechanical













### Consoles

#### WITH MECHANICAL TEMPERATURE AND PRESSURE





2347















### Consoles

#### WITH MECHANICAL TEMPERATURE AND PRESSURE (EXCEPT 2391)

2329

(f) The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.







PEDESTAL MOUNT OPERATES ON 4, 6, OR 8 CYLINDER ENGINES WITH POINTS, ELECTRONIC, AND	TACHOMETERS RANGE DESCRIPTION	MOST 12 & 16 VOLT PERFORMANCE IGNITIONS.

RANGE	DESCRIPTION	INFO	23/4"	33/4"	5"
6,000 RPM	MINI	MINI TACHOMETER/BLACK. (CANNOT ROTATE DIAL FACE)	2306	7—	_
8,000 RPM	MINI	MINI TACHOMETER/BLACK. (CANNOT ROTATE DIAL FACE)	2305		_
8,000 RPM		BLACK CASE AND BEZEL W/ BLACK DIAL. FEATURES ADJUSTABLE REDLINE		2300	_
8,000 RPM		BLACK CASE AND BEZEL W/ WHITE DIAL. FEATURES ADJUSTABLE REDLINE	_	2303	_
8,000 RPM		CHROME CASE AND BEZEL W/ BLACK DIAL. FEATURES ADJUSTABLE REDLINE		2301	_
8,000 RPM		CHROME CASE AND BEZEL W/ WHITE DIAL. FEATURES ADJUSTABLE REDLINE	_	2304	
8,000 RPM	SHIFT-LIGHT	BLACK CASE AND BEZEL W/ EXTERNAL LED SHIFT LIGHT. LIGHT POSITION IS FIXED	_	2309	_
8,000 RPM	SHIFT-LIGHT	BLACK CASE AND BEZEL W/ LED SHIFT LIGHT ON THE DIAL.	_	2302	_
8,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS		_	233905
10,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS	_	_	233904
10,000 RPM	SHIFT-LITE	SILVER SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS		8.—	233911
10,000 RPM	MEMORY	BLACK MEMORY TACHOMETER. RECALLS HIGHEST RPM ACHIEVED, BLACK. EXTERNAL SHIFT LIGHT CAN BE ADDED.		-	233902
10,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL LIGHT AND MEMORY	1 — 1	-	233906
10,000 RPM	SHIFT-LIGHT	BLACK SHIFT LIGHT TACHOMETER W/ SMALL AMBER LIGHT ON SHIELD	· -		233903
10,000 RPM	MEMORY	SILVER MEMORY TACHOMETER. RECALLS HIGHEST RPM ACHIEVED	_	-	233907

			WHITE	GAUGE	BLA	CK GA	UGE
SHORT SWEEP CONS	OLES RANGE	CONSOLE	21/16"	2%"	1 1/2"	21/16"	25/8"
TWO-GAUGE	(OIL/WATER)	BLACK	2323	_	_	2345	_
THREE-GAUGE	(OIL/AMP/WATER)	BLACK		_	_	2347	_
THREE-GAUGE	(OIL/VOLT/WATER)	BLACK	2324	_	_	2348	_
THREE-GAUGE/ELECTRIC	(OIL/VOLT/WATER)	BLACK	_	_	2391	_	_
THREE-GAUGE	(OIL/VOLT/WATER)	CHROME	2325	_	_	2349	_

OIL PRESSURE INCLUDES NYLON 6 TUBING
WATER TEMPERATURE INCLUDES 6' CAPILLARY TUBING
2347 AMMETER REQUIRES 10 GAUGE WIRE
ALL INCLUDE 1/8', 1/4', 3/8', & 1/2' NPT FITTINGS.

INFO

			WHITE	GAUGE	BLA	CK GA	UGE
FULL SWEEP CONS	SOLES RANGE	CONSOLE	21/16"	25/8"	11/2"	21/16"	25/8"
TWO-GAUGE	(OIL/WATER)	BLACK	2326	_	-	2392	2-3
THREE-GAUGE	(OIL/AMP/WATER)	BLACK	_	_	_	2393	2394
THREE-GAUGE	(OIL/VOLT/WATER)	BLACK	2327	2328	2396	2397	2398
THREE-GAUGE	(OIL/AMP/WATER)	CHROME	_		_	_	2395
THREE-GAUGE	(OIL/VOLT/WATER)	CHROME	_	2329	-	-	2399
DI A CIV CLICATE CIVIE	- D. MEGULANIIGAI	DANIEL III	malare m				

OIL PRESSURE INCLUDES NYLON 6' TUBING WATER TEMPERATURE INCLUDES 6' CAPILLARY TUBING 2333, 2394, & 2395 AMMETERS REQUIRE 10 GAUGE WIRE ALL INCLUDE 1/8", 1/4", 3/8", & 1/2" NPT FITTINGS.

INFO

BLACK SHORT SWEEP MECHANICAL	RANGE	11/2"*	21/16"*	25/8"	INFO
OIL PRESSURE	0-100 PSI		2360	_	INCLUDE 6' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
WATER TEMP	130°-280° F	_	2361	_	INCLUDES 6" TUBING, 3/8" & 1/2" NPT FITTINGS.

BLACK FULL SWEEP MECHANICAL RANGE	11/2"*	21/16"*	25/8"	INFO
BOOST/VACUUM/MECHANICAL 30INHG/20PSI	-		2310	INCLUDES 6' TUBING & 1/4" NPT FITTING.
FUEL PRESSURE/MECHANICAL 0-15 PSI	-	_	2311	REQUIRES #4 BRAIDED HOSE AND MOUNTING CUP. MUST BE MOUNTED OUTSIDE VEHICLE.
OIL PRESSURE/MECHANICAL 0-100 PS		2332	2312	INCLUDE 6' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
OIL TEMP/MECHANICAL 100°-340° F		_	2314	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.
VACUUM/MECHANICAL 30 IN.HG.	5-	2337	2317	INCLUDES 6' NYLON TUBING AND UNIVERSAL T-FITTING
WATER TEMP/MECHANICAL 100°-280° F	_	2333	2313	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.
BLACK SHORT SWEEP ELECTRIC RANGE				
FUEL LEVEL/ELECTRIC (0 $\Omega$ EMPTY/90 $\Omega$ FULL)	_	_	2316	FOR MOST GM VEHICLES 1965 TO 1997. WILL NOT OPERATE ON SOME 1998 OR LATER VEHICLES WITH 40-250 OHM SENDER.
FUEL LEVEL/ELECTRIC (73 $\Omega$ EMPTY/10 $\Omega$ FULL)	:		2315	FOR MOST FORD VEHICLES BEFORE 1989 (EXCEPT 1987 & LATER MUSTANGS) AND MOST CHRYSLER VEHICLES.
OIL PRESSURE/ELECTRIC 0-100 PSI	2354		_	INCLUDES 1/8" NPT SENDER & 1/4" NPT FITTING.
VOLTMETER/ELECTRIC 8-18 VOLTS	2356	_	_	
VOLTMETER/ELECTRIC 10-16 VOLTS		2362	2319	
WATER TEMP/ELECTRIC 100°-280° F	2355	1 1		INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.
WATER TEMP/MECHANICAL 130°-280° F	2352	_	_	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.

\* 1-1/2" & 2-1/16" INCLUDE MOUNTING PANEL

AUTOGAGE SILVER	RANGE	FULL SWEEP MECHANICAL 21/16"	SHORT SWEEP ELECTRIC 21/16"	INFO
PRESSURE (WITH PANEL)	0-100 PSI	2334		INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
TEMPERATURE (WITH PANEL)	140°-280° F	2335		INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
VOLTS (WITH PANEL)	8-18 VOLTS		2380	-

### RAM MOUNTING SOLUTIONS







RAM PODS & PILLARS (1998-2002)



RAM STEERING COLUMN POD (2003-2009)

Mounts On Top Of/Covers Existing Steering Column Trim



### TOP DASH POD (1998-2002)

Mounts On Center Top Of Dash Near Windshield, Gauges Angle Towards Driver



### STEERING COLUMN POD (1994-2002)

Mounts On Top Of/Covers Existing Steering Column Trim



### CELL PHONE/ CUP HOLDER (1998-2002)

Attaches to Fold Down Arm Rest Provides Additional Storage



P10175

### CELL PHONE/ CUP HOLDER (2003-2008)

Attaches to Fold Down Arm Rest Provides Additional Storage



RAM MOUNTING	POD A		A-PILLAR		OVERHEAD CONSOLE			STEERING COLUMN		DASH POD	CONSOLE POD	CELL PHONE/ CUP HOLDER		
SOLUTIONS	SINGLE	DUAL	SINGLE	DUAL	TRIPLE	DUAL	TRIPLE	QUAD	SINGLE	DUAL	TRIPLE	TRIPLE		
DODGE RAM 98-02	15204	15203	_	17202	17203	_	_	_	15012	-	15002	_	P10175	
DODGE RAM WITH SPEAKER 98-02	_		7-	17204	17205	-		-	_	_		-		
DODGE RAM 03-05	_	Ī	1-1	22-2		_	_	18018	(C—C)		15020	15021		
DODGE RAM 03-09	15213	15212	_	_		18016	18017		15013	15014	_	_	P10180	
DODGE RAM 03-09 (REPLACEMENT) TAUPE	_	_	17211	17212	17213	_	_	_	-	_	_	_		



# SILVERADO/SIERRA

### **GM PILLARS** (2015+) (REPLACEMENT)







SILVERADO/ PODS & PILLARS (2001-2007)











GM STEERING COLUMN POD (2007-2014)



OVERHEAD CONSOLES (2001-2007)



18022

STEERING COLUMN (2001-2002)

\* Mounts On Top Of Existing Steering Column Trim.



PODS & PILLARS (GAUGES NOT INCLUDED)		SINGLE PODS	STEERING COLUMN POD	OVERHEAD CONSOLE POD			SINGLE PILLAR		TRIPLE PILLAR
	21/16"	21/16"	21/16"		21/16"		21/16"	21/16"	21/16"
CHEVY/GM, FS TRUCK/DURAMAX 01-07 "CLASSIC"	15104	15105	I	_	_==	_	_	17104	17105
CHEVY/GM, FS TRUCK/DURAMAX 01-07 "CLASSIC" (W/SPEAKER HOLE)	_	_	_			_		17106	17107
GM FULLSIZE 01-07	_	_		18022	18023	18024	_	I	
GM FS TRUCK/DURAMAX 01-02 (AUTOMATIC)	_		15007						_
GM FS TRUCK/DURAMAX 01-02 (MANUAL)	_	_	15008	_		-	_	I	
GM 07-14 (W/O FACTORY PILLAR SPEAKER HOLE)	_	_	15023	_	_	_	_	17115	17116
GM 07-14 (W PILLAR SPEAKER HOLE)	_	_	-	_	— <sub>0</sub>			17117	17118
GM 2015+	_	_	_	_		_	17119	17120	17121

# FORD SUPER DUTY MOUNTING SOLUTIONS



FORD SUPER DUTY POD (1999-2002)



FORD SUPER DUTY POD (2008-2010)



FORD SUPER DUTY POD (2003-2007)



FORD SUPER
DUTY
PILLARS
(2011-2015)
(REPLACEMENT)







FORD SUPER DUTY
PILLARS
(2008-2010)
(REPLACEMENT)



FORD SUPER DUTY PILLARS





# **FORD SUPER DUTY** SOLUTIONS

### FORD SUPER DUTY STEERING COLUMN POD

\* Mounts On Top Of/Covers Exisitng Steering Column Trim

(2008-2010)



(2011-2015)



w/automatic transmission

#### FORD SUPER DUTY TOP DASH POD (2008-2012)

\* Mounts On Top Of Driver's Side Dash Between A-Pillar and Instrument Cluster





FORD SUPER DUTY INSTRUMENT CLUSTER BEZEL (1999-2004)



FORD SUPER DUTY CELL PHONE/ CUP HOLDER (1999-2004)



**FORD** SUPER DUTY OVERHEAD CONSOLES (1999-2004)



18016



18017



18018

PODS & PILLARS (GAUGES NOT INCLUDED)	DUAL PODS	SINGLE PODS	TRIPLE CONSOLE PODS	TRIPLE DASH PODS	STEERING COLUMN POD	SINGLE		TRIPLE PILLAR	QUAD PILLAR	INSTRUMENT CLUSTER BEZEL	CELL PHONE/ CUP HOLDER
	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	21/16"	
FORD SUPER DUTY 99-02 & EXCURSION	15306	15307	_	_	_	-			_	_	
FORD SUPER DUTY 99-04	_	N-1	_		_	_	_	_	_	15003	
FORD SUPER DUTY 99-07	_	-	15018	15016	_	_	17306	17307	17308	:	
FORD SUPER DUTY 99-07 (AUTOMATIC)		_	_	_	15010	_		_	_		
FORD SUPER DUTY 99-04 (MANUAL)	_	· · · · · · · ·	a— :	8.—	15011	_	8— I	_	-	-	
FORD SUPER DUTY 03-07 & EXCURSION	15318		_		_	_		_	_	_	P10190
FORD SUPER DUTY 03-07 W/O HANDLE	_	15319	_	_	_	_		_	_	_	P10190
FORD F-SERIES 04-08	_	15313			_	_		-	_	_	
FORD SUPER DUTY 08-10	_	15314	11-11	_	15024	-	-	_	_	_	
FORD SUPER DUTY 08-10 REPLACEMENT	_	n—	_	_	_	_	17312	17313	_	_	
FORD SUPER DUTY 08-12	15025	1 -	1 -	-	_			_	_		
FORD SUPER DUTY 11-15	_				15026	17321	17322	17323	_		

# POD & PILLAR KIT MOUNTING SOLUTIONS



## RAM PILLAR KITS (2003-2009)

(PHANTOM GAUGES

- \* Sending Units Included
- \* White Incadescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers





# RAM PILLAR KITS (1998-2002)


(Z-SERIES GAUGES INCLUDED)

- \* Sending Units Included
- \* White Incadescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



### RAM PILLAR KITS RAM (1998-2002) (ULTRA-LITE GAUGES INCLUDED)

- \* Sending Units Included
- \* White Incadescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



TWO GAUGE
PILLAR KIT

MECHANICAL
BOOST 0-35 PSI,
DIGITAL STEPPER MOTOR
PYROMETER 0-1600 F

7094
W/speaker

hole cut out

THREE GAUGE
PILLAR KIT

MECHANICAL
BOOST 0-35 PSI,

DIGITAL STEPPER
MOTOR
PYROMETER 0-1600° F,

SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F

F 7095 w/speaker hole cut out



# POD & PILLAR KIT MOUNTING SOLUTIONS

## FORD PODS & PILLARS

PODS (1999-2002) PILLARS (1999-2007)

(ULTRA-LITE GAUGES INCLUDED)

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



### FORD PODS & PILLARS

PODS (1999-2002) PILLARS (1999-2007)

(Z-SERIES GAUGES INCLUDED)

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



### GM PILLAR KITS (2001-2007)

Z-Series Gauges Included

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers

FOR 2000-2007 GM DURAMAX SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250 F

7080



# JEEP JK PILLAR KIT (2011-2015)

Sport-Comp II Gauges Included

\* Includes Sending Units & White LED Lighting

d
SHORT SWEEP
ELECTRIC
TRANSMISSION
TEMPERATURE
100-250 F,
SHORT SWEEP
ELECTRIC
OIL PRESSURE
0-100 PSI
7041

# DIRECT FIT MOUNTING SOLUTIONS



GAUGES NOT INCLUDED WITH AUTO METER DIRECT FIT PRODUCTS.

DIRECT FIT 67-68 CHEVROLET/PONTIAC CAMARO/ FIREBIRD 3 3/8" & 2 1/16"



DIRECT FIT 69 CHEVROLET CAMARO 5" & 2 1/16"



DIRECT FIT 70-78 CHEVROLET CAMARO 3 3/8" & 2 1/16"



panel with gauges / 020	panel with gauges /UZI	panel with gauges / 022
panel without gauges 2130	panel without gauges 2131	panel without gauges 2132
SS	DIRECT FIT 69-75	1000

DIRECT FIT 79-81 CHEVROLET CAMARO 3 3/8" & 2 1/16"



DIRECT FIT 69-75 CHEVROLET NOVA 5" & 2 1/16"



DIRECT FIT 70-72 CHEVROLET/CHEVELLE SS/EL CAMINO SS/ MALIBU SS 3 3/8" & 2 1/16"



panel with gauges 7023	panel with gauges 7024	panel with gauges 7025
panel without gauges 2133	panel without gauges 2134	panel without gauges 2136

DIRECT FIT 70-72 CHEVELLE/CAMINO/ MONTE CARLO 3 3/8" & 2 1/16"



DIRECT FIT 73-83
CHEVROLET TRUCK/SUBURBAN
5" & 2 1/16"



DIRECT FIT 70-78 PONTIAC FIREBIRD



panel with gauges 7026	panel with gauges 7027	panel with gauges 7028
panel without gauges 2135	panel without gauges 2137	panel without gauges 2138

DIRECT FIT 70-74 DODGE "E" BODY 3 3/8" & 2 1/16"



DIRECT FIT 71-74 DODGE/PLYMOUTH "B" BODY 3 3/8" & 2 1/16"



panel with gauges 7029	panel with gauges 7030
panel without gauges 2139	panel without gauges 2140

DIRECT FIT 82-87
CHEVROLET MALIBU/EL CAMINO/MONTE CARLO
5" & 2 5/8"



DIRECT FIT 70-76
DODGE/PLYMOUTH "A" BODY DUSTER/DEMON/DART
3 3/8" & 2 1/16"



DIRECT FIT 67-72 CHEVROLET TRUCK C-10/C-20/C-30/K-10/ K-20/K-30/K-5/SUBURBAN 3 3/8" & 2 1/16"



and the second s		
_	panel with gauges 703 l	panel with gauges 7032
panel without gauges 2143	panel without gauges 2141	panel without gauges 2142



FORD MUSTANG 65-66 3 3/8" & 2 1/16"



7035

FORD TRUCK 48-50 3 1/8" & 2 1/16"



FORD TRUCK 53-55 3 1/8" & 2 1/16"



FORD TRUCK 53-55 3 1/8" & 2 1/16"



7046 7048 7042

CHEVY CAR 55-56 3 1/8" & 2 1/16"

CHEVY CAR 55-56 3 1/8" & 2 1/16" CHEVY CAR 51-52 5" ADAPTER

CHEVY CAR 59-60 5" ADAPTER

7034

CHEVY BELAIR 55-56 2 1/16" ADAPTER FOR CLOCK

7058



7033

CHEVYTRUCK 40-46

7055

3 1/8" & 2 1/16"

CHEVY TRUCK 47-53

7038

CHEVY TRUCK 54-55



CAMARO/FIREBIRD 67-68



5" ADAPTER

5" ADAPTER

7050

7057

7039

7037

CHEVY TRUCK 55-59 3 1/8" & 2 1/16"



CHEVY TRUCK 55-59 3 1/8" & 2 1/16"



CHEVY TRUCK 60-63 3 1/8" & 2 1/16"



7047

7036

7049

CHEVY TRUCK 67-72



CHEVY TRUCK 64-66



CHEVY TRUCK 64-66




7043

7044

7045

# MOUNTING SOLUTIONS PODS & PILLARS




	_					
				SINGLE PILLAR		
CAR, TRUCK, AND VAN MODELS	21/16"	21/16"	25/8"	21/16"	21/16"	21/16"
ACURA INTEGRA, 2 DOOR 90-93	20100	20102	_	-		
ACURA INTEGRA, 2 DOOR 94-01 ACURA RSX 02-06	20110 20132	20119	_		22110 22132	22119 22133
AUDI A4 96-98	20190	20193	_		- 22132	22133
BMW 3 SERIES 93-98, 2DR (E36)	20202		_	_	_	_
BMW 3 SERIES 93-98, 4DR (E36)	20200	20201	_	_	_	<u> </u>
CHEVELLE, GTO, LEMANS 68-72	10183	10184		_	_	_
CHEVY ASTRO 95-00	15122	15123		_	_	_
CHEVY BLAZER 94-98 CHEVY CAMARO 82-92 (HARD TOP)	10200	10201	_	( <del>)</del>	17110 12200	12201
CHEVY CAMARO 82-92 (TARD TOP)	10200	10201		_	12202	12201
CHEVY CAMARO 93-02	10210	10211	10212	_	-	-
CHEVY CAMARO 97-02 (T TOP)	10210	10211			12212	
CHEVY CAMARO 10-15 (REPLACEMENT) (HARD TOP ONLY)	_	_	_	-	12214	_
CHEVY CAVALIER, Z-24 95-02	10204	10205				
CHEVY CAVALIER, 03-05 CHEVY COBALT 05-10 (2 Door)				——————————————————————————————————————	12180 12204	12181 12205
CHEVY CORVETTE 84-96 (C4)	10190	10191			12204	12205
CHEVY CORVETTE 97-02 (C5)	10194	10193	_		12192	
CHEVY CORVETTE 03-04 (C5)	_	_		_	12193	_
CHEVY CORVETTE 05-09 (C5)				0-4	12194	12195
CHEVY/GM, S-10 BLAZER 95-02	15110	15111	45000	_	-	-
CHEVY/GM, FULL SIZE 88-94 CHEVY/GM, FULL SIZE 88-98 (ALSO FOR 99 C/K)	15100	15101 15101	15102 15102	<u> </u>	17100	17101
CHEVY/GM, FULL SIZE 88-98 (ALSO FOR 99 C/K) CHEVY/GM, FULL SIZE 95-98 (ALSO FOR 99 C/K)	15103	15101	15102	<del>-</del>	17102	17103
CHEVY/GM, FS TRUCK/DURAMAX 00-06 & 07 CLASSIC	15104	15105	-		17104	17105
CHEVY/GM, FS TRUCK/DURAMAX 00-06 (W/ SPEAKER), 07 CLASSIC, & TAHOE				b <del></del> 1	17106	17107
CHEVY/GM, FS TRUCK/DURAMAX 07-14 (REPLACEMENT)		_	_	_	17115	17116
CHEVY/GM, FS TRUCK/DURAMAX 07-14 (W/ SPEAKER) (REPLACEMENT)		_		47440	17117	17118
CHEVY/GM, SILVERADO FS TRUCK (GEN 3) 14-15 CHEVY IMPALA, CAPRICE 92-96	10233	10224	10225	17119	17120	17121
CHEVY IMPACA, CAPRICE 92-96 (TRIPLE COMBINATION PILLAR)*	10233	10234	10235			12234 12235*
CHEVY MONTE CARLO 78-87	10402	10403		_		-
CHEVY/GM, S10 PICKUP 94-02	15110	15111	_	<del>-</del>	_	_
CHEVY S10 PICKUP 86-93	15113	15114		PI-2	17113	17114
CHEVY S10 PICKUP 94-98		_	_	_	17110	
DODGE CALIBER 07-11 (REPLACEMENT)		_		<del>-</del>	12238	12239
DODGE CHALLENGER 08-13	_			<u> </u>	12225	12226
DODGE DAKOTA 00-04	_	_			17206	17207
DODGE DART 13+ BLACK	_		_	12208	12209	
DODGE DART 13+ TAN				12206	12207	_
DODGE DURANGO, DAKOTA 97-01 (SINGLE POD ONLY)	15206	15207		_		_
DODGE MAGNUM/300C 04-06/CHARGER 05-06 DODGE MAGNUM/CHARGER/300C 06-08 (BEIGE)					12236 12229	12230
DODGE NEON 94-99	10240	_	_	N_2	12220	12200
DODGE NEON 00-05 (BLACK)	10242	10243	-	_	12242	12243
DODGE NEON 00-05 (BEIGE)				-	12240	12241
DODGE RAM 86-93	15198	15199	45000	<del>-</del>		47004
DODGE RAM 94-97 DODGE RAM 98-02 (EXCEPT '02 1500)	15200 15203	15201 15204	15202	_	17200 17202	17201 17203
DODGE RAM WITH SPEAKER 98-02 (EXCEPT 02 1500)	19203	15204		_	17204	17203
DODGE RAM 03-09 (ALSO FOR '02 1500) (REPLACEMENT) TOUPE		_		<u> </u>	17212	17213
DODGE RAM 03-09 (BEIGE)		15213	_	17211†		
DODGE RAM 03-09 (ALSO FOR '02 1500)	<u>—</u>	15212	_		_	_
DODGE RAM 10+ (REPLACEMENT)  DODGE RAM 10+ (LEATHER TOP ONLY)	_	_	_	13121	17218	17219
DODGE RAM 10+ (LEATHER TOP ONLY)  DODGE RAM 10-12 (EXCEPT LEATHER TOP DASH)				13121		_
DODGE RAM 13+ (EXCEPT LEATHER TOP DASH)			_	13120		
DODGE STEALTH 91-98	20630	20631		-		
DODGE VIPER GTS 96-02	_		_	:—	12237	_
ECLIPSE, TALON, LASER 90-94	20600	20601	_			
ECLIPSE, TALON 95-99	20610	20611 20406	_	_	_	
HONDA ACCORD, 98-02, 2DR HONDA, 2 & 3 DOOR ACCORD 94-97	20405 20402	20406	20404		_	
HONDA, 2 & 3 DOOR CIVIC/CRX 88-91, EF	20402	20401	20404	_		22401
HONDA, 2 & 3 DOOR CIVIC 92-95 EG	20410	20413	20416	-	22410	22413
HONDA, 2 & 3 DOOR CIVIC 96-00 EK	20428	20431	20434		22428	22431

<sup>\*</sup> NOTE: Triple Combination Pillar has two 2 1/16" gauge holes on top with one 2 5/8" gauge hole at the bottom.

<sup>†</sup> NOTE: Single Short Pillar has a shortened overall pillar height, and one standard 2 1/16" gauge hole.

GAUGES NOT INCLUDED WITH AUTO METER PODS & PILLARS.



# MOUNTING SOLUTIONS PODS & PILLARS

	DUAL PODS	SINGL	E PODS	SINGLE PILLAR	<b>DUAL PILLAR</b>	TRIPLE PILLA
CAR, TRUCK, AND VAN MODELS	21/16"	21/16"	25/8"	21/16"	21/16"	21/16"
ONDA, 2 DOOR CIVIC 01-05(EXCEPT SI)	20441	20442				22442
ONDA PRELUDE 92-96	20439	20440		_	_	_
ONDA PRELUDE 97-01	20436	20437	_	_	_	_
ONDA \$2000 00-09		20444			22443	_
YUNDAI TIBURON 03-04	20240	_	_	_		22241
NFINITI G35 02-06	20210			_	22260	22261
EEP CHEROKEE 88-01 (XJ)	15210	15211	_	<u> </u>	_	
EEP WRANGLER JK 07-10 (REPLACEMENT)	15210	10211		13118	15221	_
EEP WRANGLER JK 11-15 (REPLACEMENT)	_			13119	15222	_
MAZDA MIATA 90-98 (MX-5)	20660	20661		10110	13222	
MAZDA MIATA 99-02 (MX-5)	20662	20663				
MAZDA MIATA 03-02 (MX-5)	20666	20665				
MAZDA PROTEGÉ 00-04	20656	20003			22656	
MAZDA RX-7 86-92 FC	20670	20671				
1AZDA RX-7 80-32 FC	20674	20675			22674	22675
IERCURY MAURADER 03-04	10110	10111			22074	22075
NERCORY IMAGRADER 03-04 NTSUBISHI ECLIPSE, TALON (EXCEPT CONVERT.) 95-99	10110	10111			22610	22613
IITSUBISHI EVO 8/9 03-07	20618	20619			22618	22619
11TSUBISHI 2000GT 91-98	20630	20631				
10NTE CARLO, SKYLARK 70-72	10183	10184				
ISSAN 240SX 89-94 S13	10103	20805		_		22805
ISSAN 240SX 95-94 S13	20806	20807	_	_	22806	22807
IISSAN 2405A 95-96 S14 IISSAN 300ZX 90-96	20800	20801		_	22800	22801
ISSAN 350Z 03-08	20808	20809			22808	22809
IISSAN MAXIMA 95-99	20802	20009			22000	22803
ISSAN MAXIMA 00-03	20002	_	_	_		22813
LDSMOBILE CUTLASS 78-87	10402	10403			_	22013
ONTIAC GRAND AM 99-04	10402	10403			12220	12221
ONTIAC GRAND PRIX 78-87	10402	10403		_	12220	12221
ONTIAC GRAND PRIX 76-67	10402	10403		_	12218	12219
ONTIAC GRAND PRIX 97-03 ONTIAC FIREBIRD 82-92 (HARD TOP)	10200	10201			12210	12219
ONTIAC FIREBIRD 82-92 (T TOP)	10200	10201			12200	12201
ONTIAC FIREBIRD 93-92 (1 TOP)	10200	10201	10212	_	12202	
ONTIAC FIREBIRD 93-02 (HARD TOP)	10210	10211	10212	_	12212	_
CION TC 05-09	10210	10211	10212		22685	22686
UBARU IMPREZA 93-00 GC8		20591	200		22000	22000
UBARU IMPREZA 93-00 GC8 UBARU IMPREZA, WRX, & STI 01-07 (SEDAN) (GD)	20590 20592	20593			22592	22593
OYOTA LAND CRUISER 92-97	20592	15413			22592	22593
OYOTA LAND CRUISER 92-97 OYOTA LAND CRUISER 98-00	_	15414		_	_	
OYOTA MR-2 90-99		20681		_		=
OYOTA (KK-2 90-99 OYOTA CELICA 00-05	20680			_	_	_
OYOTA SUPRA 93-02	20694 20690	20695				
		15411				_
OYOTA TACOMA & 96-00 4RUNNER 95-00 OYOTA TACOMA 01-04	_		_			_
		15415		<u> </u>	22100	_
OLKSWAGEN BEETLE 99-10 W/SPEAKER OLKSWAGEN GOLF 99-05	20052	20853			22190	_
	20852			<u></u> 0	_	_
/OLKSWAGEN GOLF/JETTA 93-98 /OLKSWAGEN PASSAT 98-05	20850 20846	20851 20847		_	_	_

RIGHT HAND DRIVE PODS & PILLARS	DUAL PODS
CAR & TRUCK MODELS	21/16"
HONDA CIVIC 92-95 EG (RIGHT HAND DRIVE)	23410
MAZDA RX7 93-02 FD (RIGHT HAND DRIVE)	23674
NISSAN 240SX 89-94 S13 (RIGHT HAND DRIVE)	23900
NISSAN 240SX 95-98 S14 (RIGHT HAND DRIVE)	23902
NISSAN 300ZX 90-96 (RIGHT HAND DRIVE)	23800
NISSAN SKYLINE R32 91-94 (RIGHT HAND DRIVE)	23904
NISSAN SKYLINE R33 95-98 (RIGHT HAND DRIVE)	23906
TOYOTA MR2 90-99 (RIGHT HAND DRIVE)	23680
TOYOTA SUPRA 93-02 (RIGHT HAND DRIVE)	23690

# FORD MOUNTING SOLUTIONS, PODS, PILLARS & PANELS



FORD	DUAL	PODS	SINGLE PODS		SINGLE PILLAR	DUAL	PILLAR	TRIPLE	PILLAR	QUAD PILLAR
CAR, TRUCK, AND VAN MODELS	21/16"	25%"	21/16"	25/8"	21/16"	21/16"	25/8"	21/16"	25/8"	21/16"
FORD ECONOLINE 03-08			_	_		17319		17320	_	
FORD EXPLORER 95-99	15308	_	15309	_	_		* <u></u>	-	<u> </u>	_
FORD FOCUS 00-01	10104	_	10105		_		-	12107	_	
FORD FOCUS 02-04		_	_		_	12108	_	12109	_	_
FORD F SERIES 87-97 (EXCEPT '97 F-150)	15300		15301	15302			_	_	_	
FORD F SERIES 92-97 (EXCEPT '97 F-150)	15300	_	15301	15302	_	17302	_	17303	_	_
FORD F SERIES 04-05		_	15313							
FORD F-150 & EXPEDITION 98-03 (ALSO FOR 1997 F-150)	15303		15304	15305	_		_	_	_	_
FORD F-150 97-01 & 02 HARLEY EDITION	15303	_	15304	15305	100	17304	1-2	17305	-	_
FORD F-150 02-03		_	_	_	_	17310	_	17311	_	
FORD F-150 04-08	15312	_	15313	_		1122	97 <u>—22</u>	_	_	
FORD F-150 04-08 (REPLACEMENT)		_			_	17317		17318	<del>-</del>	<del></del>
FORD F-150 W SPEAKER 09-14 (REPLACEMENT)	_	_	_	_	17325	17327	10	17329	-	
FORD F-150 W/O SPEAKER 09-14 (REPLACEMENT)	_	_	_	_	17324	17326	_	17328	_	_
FORD MUSTANG 79-93 (FOX)	10100	10103	10101	10102	1-	1.—	8 <del></del>		-	_
FORD MUSTANG 87-93 (HARD TOP) (FOX)	_	_			_	12100	12102	12101	12103	_
FORD MUSTANG 94-02 (HARD TOP) (SN95)	10120		10121		1	12120		12121	_	
FORD MUSTANG 94-00 (CONVERTIBLE) (SN95)	10125	_	10126		_		_	_	_	_
FORD MUSTANG 01-04 (CONVERTIBLE) (SN95)		_		_		12125	10_00	12126	12	
FORD MUSTANG 03-04 (HARD TOP) (SN95)	10122	_	10123	_	_	12122	-	12123	_	<del>-</del>
FORD MUSTANG 05-09 (HARD TOP) (S197)	-	_	_	_	_	12127	_	12128	_	
FORD MUSTANG 05-09 (CONVERTIBLE) (S197)						12129	_	12130		
FORD MUSTANG (HARD TOP) 10-14	_		10129			12131	_	12132	_	
FORD MUSTANG (HARD TOP) 10-14 (REPLACEMENT)	_	_			_	12133	79 <u>—2</u>	12134	<u> </u>	
FORD PROBE 93-97		_	_	_		12104	0.—-	12105	_	_
FORD RANGER 93-02	15308	_	15309	_	_	_			_	_
FORD SUPER DUTY 99-02 & EXCURSION	15306		15307	_		17306	- a	17307	_	17308
FORD SUPER DUTY 03-07 W/O HANDLE	_	_	_	_	15319†	_	_	_	_	_
FORD SUPER DUTY 03-07 & EXCURSION		_	15318	_	_	17306	77 <u>-0</u> 2	17307	_	17308
FORD SUPER DUTY 08-10	_	_	15314†	_	_	_	-	_	_	_
FORD SUPER DUTY 08-10 (REPLACEMENT)		_	_			17312	_	17313		
FORD SUPER DUTY 11+ (REPLACEMENT)		_	_		17321	17322	-	17323		_
FORD THUNDERBIRD 89-93	10116	_	_		-	_	_		_	
FORD THUNDERBIRD 94-97	10118	_	_		_		_	_	_	
FORD VAN 92-02	15315		15316	15317	-	17315	_	17316	_	_
FORD VAN, E-SERIES 03-08	_	_	15320	_	_	17319	_	17320		





#### (SN95) MUSTANG RACE PANELS (GAUGES NOT INCLUDED)

CAR & TRUCK MODELS	INCLUDES/DETAILS				
MUSTANG 94-04 (REPLACES ORIGINAL CLUSTER)	HOLDS TWO 3 3/8" INSTRUMENTS AND FOUR 2 1/16" GAUGES. '99 & NEWER MODELS REQUIRE DEACTIVATION OF PASSIVE ANTI THEFT SYSTEM.	10008			
MUSTANG 94-04 (REPLACES ORIGINAL CLUSTER)	HOLDS ONE 5' INSTRUMENT AND FOUR 2 5/8" GAUGES. '99 & NEWER MODELS REQUIRE DEACTIVATION OF PASSIVE ANTI THEFT SYSTEM.	10010			





(GAUGES NOT INCLUDED)

GAUGE CAGES - REPLACES CENTRAL	DUAL CAGE	DUAL CAGE (WITH VENTS)	TRIPLE CAGE	
CAR MODELS	COLOR	25/8"	25/8"	25/8"
ORD MUSTANG 87-93 (FOX)	BLACK	50102	50101	50100



JEEP JK PILLAR KIT 11-15

SPORT-COMP II GAUGES INCLUDED

SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250 F, SHORT SWEEP ELECTRIC OIL PRESSURE 0-100 PSI

JEEP WRANGLER YJ 87-95 REPLACES FACTORY BEZEL & **FACTORY GAUGES MUST** BE REPLACED. (FOR 3 3/8" TACH & SPEEDO) 15220

JEEP YJ KIT

87-95

7040

(FOR 3 3/8" TACH &

SPEEDO

& 2 1/16" GAUGES)



(JEEP SERIES GAUGES INCLUDED)



**JEEP WRANGLER YJ 87-95** 


REPLACES FACTORY BEZEL & FACTORY GAUGES MUST BE REPLACED. ANGLES GAUGES TOWARD DRIVER FOR **ENHANCED VIEWING.** (FOR 2 1/16" GAUGES)

15218



7041

DIRECT FIT CHEVY TRUCK 55-59 (FOR 3 3/8" SPEEDO & 2 1/16" GAUGES) 2208 (INCLUDES BLACK FACEPLATE)



DIRECT FIT













LOOK FACEPLATE



CARBON FIBER LOOK FACEPLATE

CAR AND TRUCK MODELS	GAUGE HOLE SIZES	DIRECT FIT PANELS
CHEVROLET CAMARO 69	5" & 2 1/16"	2131
CHEVROLET CAMARO 70-78	3 3/8" & 2 1/16"	2132
CHEVROLET CAMARO 79-81	3 3/8" & 2 1/16"	2133
CHEVROLET NOVA 69-75	5" & 2 1/16"	2134
CHEVROLET CHEVELLE SS/CAMINO SS/MONTE CARLO SS 70-72	3 3/8" & 2 1/16"	2135
CHEVROLET/CHEVELLE/EL CAMINO/MALIBU 70-72	3 3/8" & 2 1/16"	2136
CHEVROLET/PONTIAC CAMARO/FIREBIRD 67-68	3 3/8" & 2 1/16"	2130
CHEVROLET TRUCK SUBURBAN 73-83	5" & 2 1/16"	2137
CHEVY BEL AIR 55-56	3 3/8" & 2 1/16"	2207
CHEVY MALIBU/EL CAMINO/MONTE CARLO	5" & 2 5/8"	2143
CHEVY TRUCK 55-59	3 3/8" & 2 1/16"	2208
CHEVY TRUCK C-10/C-20/C-30/K-10/K-20/K-30/K-5 SUBURBAN 67-72	3 3/8" & 2 1/16"	2142
DODGE "E" BODY 70-74	3 3/8" & 2 1/16"	2139
DODGE/PLYMOUTH "A" BODY DUSTER/DEMON/DART 70-76	3 3/8" & 2 1/16"	2141
DODGE/PLYMOUTH "B" BODY 71-74	3 3/8" & 2 1/16"	2140
JEEP WRANGLER YJ 87-95	3 3/8"	15220
JEEP WRANGLER YJ 87-95	2 1/16"	15218
JEEP WRANGLER YJ KIT 87-95 (GAUGES INCLUDED)	3 3/8" & 2 1/16"	7040
JEEP WRANGLER TJ 97-06	3 3/8" & 2 1/16"	5381
PONTIAC FIREBIRD 70-78	3 3/8" & 2 1/16"	2138
PONTIAC FIREBIRD 70-78	3 3/8" & 2 1/16"	12201

# MOUNTING **SOLUTIONS**



**GAUGES NOT** INCLUDED.

MITSUBISHI EVO 8 03-07 20026



MITSUBISHI 20029 EVO 8 03-07



**HUMMER H2 02-06** DUAL DASH POD 15022



20020



15016




02-07 20032







JEEP WRANGLER TJ 97-06 MOUNTS TWO 2 1/16" GAUGES ABOVE HVAC VENTS, ADDITIONAL SWITCH MOUNTING SPACE PROVIDED. **IDEAL FOR** MOUNTING TRANS TEMP., AIR PRESS, OR DIFF. TEMP. GAUGES 15219





**GAUGES NOT INCLUDED WITH PODS** 

# 5th GEN CAMARO CONSOLE POD









05-09 MUSTANG 10050



#### LATE MODEL MOUNTING SOLUTIONS

	DESCRIPTION	MODEL #
CHALLENGER 3 GAUGE DASH POD	DIRECT FIT MOUNT ABOVE CENTER STACK ON DASH FOR 2 1/16" GAUGES	5287
CAMARO CONSOLE POD	DIRECT FIT FOR 2010-2015 CAMARO, HOLDS MOST 2-1/16" ELEC AUTO METER GAUGES	5286
SCION FRS/SUBARU BRZ 12+	FOR USE WITH AUTO METER 2 1/16" GAUGES	5285

GAUGE POD DIMENSIONS						
MODEL #   HEIGHT   WIDTH   DEPTH						
5287	3.25"	8.4"	4.46"			

# GAUGES NOT INCLUDED.



# MOUNTING SOLUTIONS

**INSTRUMENT CLUSTER BEZELS & TRIPLE GLOVE BOX MOUNT** 

CAR & TRUCK MODELS	LOCATION	INCLUDES/DETAILS	MODEL #
FORD MUSTANG 94-00 (SN95)	INSTRUMENT	FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	10003
FORD MUSTANG 01-04 (SN95)	CLUSTER	FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	
FORD SUPER DUTY 99-04	BEZEL	FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	15003
SUBARU IMPREZA, WRX & STI 02-07	GLOVE BOX	FOR USE WITH AUTO METER 2 1/16" GAUGES. INCLUDES OPTIONAL "CUT OUTS" FOR TURBO TIMERS AND CONTROLLERS.	20032

STEERIN	G COLUMN	I & CONSOLE PODS	SINGLE PODS	DUAL PODS	TRIPLE POD	QUAD POD
CAR & TRUCK MODELS	LOCATION	INCLUDES/DETAILS	21/16"	21/16"	21/16"	21/16"
ACURA RSX 02-04	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	20016	_	_	
CAMARO FACTORY CONSOLE 68-69	LOWER			_		10002
COBALT 05-10	STEERING COLUMN	10020	_			
CHEVY/GM, FS TRUCK/DURAMAX 99-02 (AUTOMATIC)			15007	_	_	_
CHEVY/GM, FS TRUCK/DURAMAX 99-02 (MANUAL)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15008		1—1	
CHEVY/GM, FS TRUCK/DURAMAX 07-13 (AUTOMATIC)		~	15023	_	_	_
CHEVY NOVA FACTORY CONSOLE 68-74		LOWER MOUNTS FOUR 2 1/16" GAUGES IN THE FACTORY SHIFTER CONSOLE			_	10002
DODGE RAM 94-02 (EXCEPT 02 1500)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16' GAUGES	15012	_	_	
DODGE RAM 03-05	CENTER	FOR USE WITH AUTO METER 2 1/16" GAUGES				15021
DODGE RAM 03-09 (ALSO FOR 02 1500)		FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15013	15014	_	_
DODGE VIPER 96-02	OTEFRINO		10006		2—2	
FORD F-150 97-01 (AUTOMATIC)	STEERING COLUMN		15004	_	_	_
FORD F-150 09-14 (FLOOR SHIFT)	COLONNIA		15006	· -	2-2	
FORD F-150 09-14 (COLUMN SHIFT)			15027	1		_
FORD MUSTANG 94-04 (SN95)	STEERING COLUMN	FITS OVER STEERING COLUMN AND HOLDS A SINGLE 2 1/16" AUTO METER GAUGE	10004	_	_	
FORD SUPER DUTY 99-07 (AUTOMATIC)	OTEFRINO	FITO OVER OTFERING COLUMN FOR LIGE WITH	15010	]		_
FORD SUPER DUTY 11-14 (AUTOMATIC)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15026			
FORD SUPER DUTY 99-04 (MANUAL)	002011111	ACTO WETER E 1/10 GACCEC	15011		_	_
FORD SUPER DUTY 99-06	LOWER	FOR USE WITH AUTO METER 2 1/16' GAUGES	_	_	15018	
MAZDA 3 03-08			20033	20034	_	_
MITSUBISHI EVO 8 03-07	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	20023	20024		
MITSUBISHI EVO 8 03-07	UPPER	FOR HOS INVITED ANTES O AVAILABLE	_		20026	
MITSUBISHI EVO 8 03-07	LOWER	FOR USE WITH AUTO METER 2 1/16' GAUGES		_	20029	
PORSCHE BOXSTER 97-04 986			20013	_		
PORSCHE 911 99-04 996	STEERING	FITS OVER STEERING COLUMN, FOR USE WITH	20013	_	_	
VOLKSWAGON GOLF/JETTA 99-05	COLUMN	AUTO METER 2 1/16" GAUGES	20019	20020	_	_
VOLKSWAGON PASSAT 99-05			20021	20022	-	_

TACH DAS	H & DASH PODS	SINGLE PODS	DUAL PODS	TRIPLE PODS	5 GAUGE PODS	TACH PODS
CAR & TRUCK MODELS	INCLUDES/DETAILS	21/16"	21/16"	21/16"	21/16"	5"
DODGE RAM 98-02 (EXCEPT 02 1500)	FOR USE WITH AUTO METER 2 1/16" GAUGES	2-3	_	15002	_	
DODGE RAM 03-09	FOR USE WITH AUTO METER 2 1/16" GAUGES	_	15019	15020	_	_
FORD MUSTANG 87-93 (FOX)	FOR USE WITH 5" AUTO METER TACHS WITH 3 3/8" CASE AND 2 5/8" GAUGES	-	_	_	_	49102
FORD MUSTANG 94-04 (SN95)	REPLACES CLOCK ON 94-98 MODELS. HOLDS 2 AUTO METER 2 1/16" GAUGES	_	10001	_	_	
FORD MUSTANG 05-09 (BLACK) (S197)	MOUNTS 3 AUTO METER 2 1/16" GAUGES IN CENTER OF DASH	_		10050		_
FORD SUPER DUTY 99-04	FOR USE WITH AUTO METER 2 1/16" GAUGES			15016		
FORD SUPER DUTY 08-12	FOR USE WITH AUTO METER 2 1/16" GAUGES	15025	_	_	_	_
HONDA CIVIC 92-95, EG	FOR USE WITH 5" AUTO METER TACHS WITH 3 3/8" CASE AND 2 5/8" GAUGES			_		49202
HUMMER H2	FOR USE WITH AUTO METER 2 1/16" GAUGES		15022	_		
JEEP WRANGLER TJ 97-06	FOR USE WITH AUTO METER 2 1/16" GAUGES	_	15219	<u></u>	_	_
JEEP WRANGLER YJ DUAL CLUSTER BEZEL 87-95	REPLACES FACTORY DASH BEZEL ON YJ JEEPS, ALLOWING FITMENT OF TWO 33/8" AUTO METER INSTRUMENTS.	<u> </u>	15220	_		_
JEEP WRANGLER YJ REPLACEMENT BEZEL 87-95	FOR USE WITH AUTO METER 2 1/16" GAUGES. REPLACES FACTORY BEZEL AND FACTORY GAUGES MUST BE REPLACED.	_	_	_	15218	_
JEEP JK 07-10	FOR USE WITH AUTO METER 2 1/16" GAUGES	_		5380	_	_
SCION FRS/SUBARU BRZ 12-14	FOR USE WITH AUTO METER 2 1/16" GAUGES	_	_	5285	_	_
SUBARU IMPREZA,WRX & STI 02-07	FOR USE WITH AUTO METER 2 1/16" GAUGES	2-3		20018		
VOLKSWAGON BEETLE 98-10	FOR USE WITH AUTO METER 2 1/16" GAUGES			20009		

# MOUNTING **SOLUTIONS**




**GAUGES NOT** INCLUDED WITH AUTO METER UNIVERSAL MOUNTING SOLUTIONS.

# **PANELS**







# **5" PEDESTAL MOUNT SHOCK STRAP KIT**









**FIBER** 

2 5/8" BLACK CUP 5202

2 1/16" BLACK CUP 2204

2 5/8" CHROME CUP 3201



CARBON CUP 2155 (CUP ONLY)







3209

3 3/8" CHROME CUP 5203

2 5/8" CHROME CUP 3203

2 1/16" CARBON FIBER CUP 2121

#### **GAUGE AND TACHOMETER** PEDESTAL MOUNT

GAU	GES	TACHOMETER
21/16"	25/8"	
48009		48011
_	48010	







**TACHOMETER** PEDESTAL MOUNT



GAUGE POD DIMENSIONS						
MODEL #   HEIGHT   WIDTH   DEPTH						
5288	3.25"	8.4"	4.46"			

PANELS	COLOR	INCLUDES/DETAILS	21/16"	<b>2</b> 5⁄8"
1 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2236	3231
2 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2237	3232
3 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2238	3233
	(0)			

<b>GAUGE POD</b>	COLOR	INCLUDES/DETAILS	
3 HOLE DASH POD FOR 2 1/16" GAUGES	BLACK	REVERSIBLE FACEPLATE, CAN BE MOUNTED W/ INCLUDED HARWARE OR DOUBLE FACE TAPE	5288

PANE	L DIMENSI	ONS
MODEL #	HEIGHT	WIDTH
2236	2-15/16"	2-1/2"
2237	2-15/16"	5"
2238	2-15/16"	7-1/2"
3231	3-7/16"	3-1/16"
3232	3-7/16"	6-1/8"
3233	3-7/16"	9-3/8"

MOUNTING CUPS			BLACK		C	CHROME		CARBON FIBE		BER
TYPE OF GAUGE	INCLUDES/DETAILS	21/16"	25/8"	33/8"	21/16"	25/8"	33/8"	21/16"	25/8"	5"
AUTOGAGE	FOR USE WITH ALL 2 1/16" AUTO GAGE GAUGES	2204	<u></u>	70-0	2203		_	2121		2
AUTO METER	3201 & 3202 ARE FOR USE WITH AUTO METER 2 5/8" ELECTRIC GAUGES ONLY	2204	3202	_	2203	3201	1-1	2121	_	1-1
AUTO METER ELECTRIC	FOR USE WITH AUTO METER 2 5/8" ELECTRIC GAUGES ONLY	_			8 <u>—</u> 41	_	_	( <u>17 - 18</u>	2151	
AUTO METER MECHANICAL	FOR USE WITH AUTO METER 2 5/8" MECHANICAL GAUGES ONLY	_	, .—,	_	10-0			_	2152	2 1
AUTO METER MECH. TEMP.	FOR USE WITH AUTO METER 2 5/8" MECHANICAL TEMP. GAUGES ONLY	_	3204	_	-	3203	_		_	1-
AUTO METER PRESSURE	FOR USE WITH AUTO METER 2 5/8" MECHANICAL PRESSURE GAUGES ONLY	_	3204	_	_	3203	_	-	_	_
IN DASH TACHS & SPEEDOS	FOR USE WITH 3 3/8" IN DASH TACHS & ELECTRIC SPEEDOS	_		5204	1,		5203			2-0
PEDESTAL MOUNT	FOR 5" PEDESTAL MOUNT TACHOMETERS WITH 3 3/8" CASE	_		_			1-1	_	_	2155
PRO-COMP LIQUID FILLED	FOR USE WITH PRESSURE & TEMP. GAUGES (EXCEPT BRAKE PRESSURE)	_	5202	_	·	5201	_	12-2	2000	-



# MOUNTING SOLUTIONS

ROLL PODS	GAU	GES	FOR FACTORY
	21/16"	25%"	PEDESTAL MOUNT TACHOMETER
1 1/2" ROLL CAGE	48000	48001	48002
1 5/8" ROLL CAGE	48003	48004	48005
1 3/4" ROLL CAGE	48006	48007	48008



#### **GAUGE MOBILE SUCTION MOUNT**

MODEL NUMBER

2 1/16" MOBILE SUCTION MOUNT FOR AUTO METER ELECTRIC GAUGES (INCLUDES 12V POWER PLUG HARNESS)

5231



OVERHEAD CONSOLE PODS	DUAL PODS	TRIPLE PODS	QUAD PODS
CAR & TRUCK MODELS	21/16"	21/16"	21/16"
GM FULLSIZE 00-06 (+07 CLASSIC)	18022	18023	18024
DODGE RAM 03-08	18016	18017	18018
FORD SUPER DUTY 99-04	18016	18017	18018
SUBARU IMPREZZA WRX/STI 08-13	20007	_	_

Dodge Ram 03-08 Dash Pod 18017



(18016,18017, AND 18018 FIT BOTH FORD AND DODGE)



TRANS. TEMP. -Measure transmission temperature to avoid clutch burn out, plate slippage, and premature seal failure.



PYROMETER Measures your
EGT (Exhaust Gas
Temperature) to
monitor engine load
and lets you know if
you've been hauling
too long or too hard.



BOOST - Measure engine boost to keep you in the powerband. A must for turbo charged engines.

#### **DIESEL TRUCK & FACTORY MATCH DIESEL PILLAR KITS (INCLUDES GAUGES)**

	ULTRA-LITE (silver)		Z-SERIES (black)		PHANTOM (white)		FACTORY MATCH PILLARS		FACTORY MATCH PILLARS W SPEAKER HOLE				
	A-PILLAR		A-PILLAR		A-PILLAR								
TRUCK MODELS	SINGLE	DUAL	TRIPLE	SINGLE	DUAL	TRIPLE	SINGLE	DUAL	TRIPLE	DUAL	TRIPLE	DUAL	TRIPLE
DODGE RAM KITS 98-02 (W FACTORY SPEAKER HOLE)	7093	7094	7095	7090	7091	7092	_		1-		<u></u>	8—8	
DODGE RAM KITS 03-09 (TAUPE)	_		_		_	_		7097	7098	_	_		-
<b>DODGE RAM FACTORY MATCH PILLAR 03-09</b>	-	_	_		_	_			_	7096	7099	-	_
DODGE RAM FACTORY MATCH PILLAR 10-14	_					_		1	_	7082	7089		_
FORD POWERSTROKE/SD KITS 99-02	7073	7074	7075	7070	7071	7072	_		_	_	_	_	_
FORD POWERSTROKE/SD KITS 03-07	_	7074	7075		7071	7072	_	_	_	_			_
FORD SUPER DUTY FACTORY MATCH PILLAR 99-07	_	_	-	_	_	_	_		- I	7076	7077	_	_
GM DURAMAX KITS 00-06	7083	7084	_	7080	7081	_	_	_	s-		_	—	
<b>GM DURAMAX FACTORY MATCH PILLAR 00-06</b>	_	-	_	_	_	_		_		7085	7086	7088	7087

**NOTE:** Single Pillar includes Transmission Temperature gauge. Dual Pillar includes Boost and Pyrometer gauge. Triple Pillar includes Boost, Pyrometer and Transmission Temperature gauge. (**Dual and Triple Pillars for Dodge Ram include hole for speaker**) Trans. Temp and Illumination wire not included. Single Pillar is not full length.

# **DIGITAL PRO SHIFTS** LIGHTS





6187, 6188

7187, 7188

5787, 5788

PLAYBACK BOX/ RPM SWITCH



4387

4388

4389








3387 3388 3389



5312 5313 5314



DPSS TECHNOLOGY LEVELS							
Level	Shift Points	Launch Light	Progressive Shift & Launch	LED Color Option	Memory	Play Back	
1	1	N	N	1	Peak	N	
2	4	Y	Υ	7	Peak	N	
3	4	Υ	Y	7	80 sec. & Peak	Υ	



5350





QUICK-LITE SHIFT-LITE CHROME, BLACK (SHOWN), & SILVER



SHIFT-LITETM

5332

5333

5335


5329 5330 5331

5334

PRO-LITE®








**RACE ONLY** 

MINI SHIFT LITE

**RACE ONLY** MINI SHIFT LITE PEDESTAL MOUNT



**PRO-LITE Specifications** It is recommended that the Pro-Lite be used in conjunction with a gauge to give first alert to potential problems.



SHIFT & WARNING LIGHT CURRENT DRAW (WHEN LIT)					
LIGHT TYPE	CURRENT DRAW AMPERAGE				
Quick-Lite	115 mA				
Shift-Lite	1.4 A				
Super-Lite	95 mA (Low), 135 mA (Med), 200 mA (HI)				
Mini Pro-Lite	265 mA				
Pro-Lite	1.4 A				



5320









3239

MINI PRO-LITE® WARNING LITE

3238 Note: Requires a Temperature or Pressure Switch to Activate



# DIGITAL PRO SHIFTS SHIFT-LITES WARNING LIGHTS

2 <sup>1</sup> /16" DIGITAL PRO-SHIFT GAUGES (DPSS) (FOR CUP, IN-DASH OR POD MOUNTING)	INFO	MODEL #
COBALT	LEVEL 1: BLUE LED DISPLAY AND SHIFT LIGHT.	6187*
COBALT	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	6188*
C2	LEVEL 1: BLUE LED DISPLAY AND SHIFT LIGHT.	7187*
C2	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	7188*
NV	LEVEL 1: GREEN LED DISPLAY AND SHIFT LIGHT.	7387*
NV	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	7388*
PHANTOM (ALSO MATCHES PHANTOM II)	LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	5787*
PHANTOM (ALSO MATCHES PHANTOM II)	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5788*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)	LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	3387*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	3388*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)	LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	3389*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)	LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	4387*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	4388*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)	LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	4389*

DIGITAL PRO-SHIFT MODULES (DPSS)	INFO	MODEL #
RPM SWITCH	LEVEL 1: SINGLE STAGE RPM SWITCH.	5312*
RPM SWITCH	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT	5313*
PLAYBACK BOX	LEVEL 3: LAUNCH LIGHT, 5 STAGE RPM SWITCH, PLAYBACK.	5314*

DIGITAL PRO-SHIFT SHIFT-LITES (DPSS)	INFO	MODEL #
BLACK TUBE	LEVEL 1: AMBER LED DISPLAY AND SHIFT LIGHT.	5343*
BLACK TUBE	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5348*
BLACK TUBE	LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	5350*
SILVER TUBE	LEVEL 1: AMBER LED DISPLAY AND SHIFT LIGHT.	5344*
SILVER TUBE	LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5349*
SILVER TUBE	LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	5351*

SHIFT-LITES COLOR		INFO	MODEL #
12 LED SUPER-LITE™	BLACK	DIRECT REPLACEMENT FOR EXISTING AUTO METER SHIFT-LITES. CAN ALSO BE ACTIVATED WITH DIGITAL	5332
12 LED SUPER-LITE™	SILVER	PRO-SHIFT MODULES/PLAYBACK BOX. (CANNOT BE USED AS STAND ALONE)	5333
QUICK-LITE SHIFT-LITE	BLACK	DIDECT DEDIA OFMENT FOR EVICTING A LITCH METER CHIEF LITCH CAN ALCO DE ACTIVATED MITH DICITAL	5330
QUICK-LITE SHIFT-LITE	CHROME	DIRECT REPLACEMENT FOR EXISTING AUTO METER SHIFT-LITES. CAN ALSO BE ACTIVATED WITH DIGITAL PRO-SHIFT MODULES/PLAYBACK BOX. AMBER LED. (CANNOT BE USED AS STAND ALONE)	5329
QUICK-LITE SHIFT-LITE	SILVER	The other medicine interviewed by a control of the other activity	5331
SHIFT-LITE	BLACK	REPLACEMENT INCANDESCENT SHIFT LIGHT. INCLUDES AMBER LENS AND YELLOW NIGHT COVER. (CAN	5334
SHIFT-LITE	SILVER	NOT BE USED AS STAND ALONE)	5335
MINI SHIFT-LITE (RACE ONLY)	BLACK	1-3/4" ROLL BAR MOUNT. RPM SIGNAL GENERATOR REQUIRED FOR PROGRAMMING. OVER REV INDICATION	5320
MINI SHIFT-LITE (RACE ONLY)	BLACK	PEDESTAL MOUNT. RPM SIGNAL GENERATOR REQUIRED FOR PROGRAMMING. OVER REV INDICATION	5321

WARNING-LITES & LENS KITS RANGE	INFO	MODEL #
LENS KIT BLUE	INCHIDEGLENG & MIGHT COVER MICRIC WITH COME AND ALL NOVILED	3250
LENS KIT RED	INCLUDES LENS & NIGHT COVER. WORKS WITH 3240 AND ALL NON LED LARGE SHIFT LITES.	3252
LENS KIT YELLOW	EARGE SHIFT EITES.	3251
MINI PRO-LITE® COVER KIT	INCLUDES BLUE, YELLOW, AND RED BOOTS AND NIGHT COVERS	3254
MINI PRO-LITE® WARNING LITE SILVER	INCANDESCENT BULB. INCLUDES BLUE, RED, & YELLOW BULB BOOTS &	3238
MINI PRO-LITE® WARNING LITE BLACK	NIGHT COVERS. PRESSURE OR TEMP SWITCH REQUIRED	3239
PRESSURE SWITCH 18 PSI		3241
PRESSURE SWITCH 30 PSI	1/8" NPT	3242
PRESSURE SWITCH 50 PSI		3243
PRO-LITE® WARNING LITE	BLACK CASE, RED LENS AND RED NIGHT COVER. SWITCH REQUIRED	3240
TEMP SWITCH 200° F	LIGHT TURNS ON AT 200°F AND OFF AT 170° F, 1/2" NPT.	3246
TEMP SWITCH 220° F	LIGHT TURNS ON AT 220°F AND OFF AT 190° F, 1/2" NPT.	3247

# **BATTERY EXTENDER** 1 1/2" GAUGES



# **BATTERY EXTENDER**

The reinvention of the legendary Auto Meter Battery Extender, this highly improved unit features massively expanded compatibility with nearly all battery types, (including AGM), automated de-sulfation, overcharge protection and the lowest power usage available.


BATTERY EXTENDER	VOLTAGE	CHARGE CURRENT	CHARGING MODES	BATTERY COMPATIBILITY	OVERCHARGE PROTECTION	INCLUDES
BEX-1500	12V	1.5 AMPS	DESULFATION, BULK,		~	RING TERMINALS
BEX-3000	12V	3.0 AMPS	ABSORPTION, AND	FLOODED, AGM, GEL	~	AND BATTERY
BEX-5000	6V, 8V, 12V, 16V	5.0 AMPS	MAINTAIN		~	CLIPS



# 11/2" LIQUID FILLED GAUGES

**PRESSURE** 

These I I/2" Liquid Filled Mechanical Pressure gauges are a great way to monitor critical pressures under the hood! They feature an 1/8" NPT Male port for easy, leak-free connections, extreme vibration resisitance, and are available in Black, White, or Silver to match your other Auto Meter gauges.









2177



2178

PRESSURE







GAUGES	INCLUDES/DETAILS	MODEL NUMBER
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2172
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2173
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2174
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2175
11/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2176
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2177
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, SILVER DIAL, POLISHED BEZEL 1/8" NPT PORT	2178
11/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, SILVER DIAL, POLISHED BEZEL, 1/8' NPT PORT	2179
1½" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, SILVER DIAL, POLISHED BEZEL, 1/8" NPT PORT	2180



# TACH ADAPTER SIGNAL CONVERTER TACH ACCESSORIES

MAGNETO SIGNAL CONVERTER	ALLOWS ANY AUTO METER SPORT-COMP OR PRO-COMP STANDARD IGNITION TACHOMETER, OR DPSS CONTROLLER MODULE TO BE USED IN MOST EXTERNAL COIL MAGNETO APPLICATIONS. (SUPRESSION CORE PLUG WIRES REQUIRED)	9118
TACHOMETER FILTER	USED TO HELP SMOOTH TACHOMETER POINTER WHEN USED WITH SOME POINTS IGNITIONS, OR OTHER ELECTRONICALLY 'NOISY' IGNITIONS	9116
DIMMER SWITCH	ALLOWS FOR ISOLATED DIMMING OF LED THROUGH THE DIAL LIT GAUGES SEPARATE FROM OEM DASH. COMPATIBLE WITH ALL LED LIT INSTRUMENTS. SUPPORTS UP TO 6 GAUGES.	9114
DIS TACH ADAPTER	ALLOWS ANY AUTO METER STANDARD IGNITION TACHOMETER OR DIGITAL PRO SHIFT SYSTEM GAUGE, TUBE, OR CONTROLLER MODULE TO BE USED ON DISTRIBUTORLESS IGNITIONS. (FUEL INJECTED)	9117
LS TACH ADAPTER KIT	INCLUDES 2189 HARNESS AND 9117 ADAPTER. UP TO MODEL YEAR 2013 LS APPLICATIONS.	9123
LS TACH ADAPTER HARNESS	A SIMPLE PLUG & PLAY SOLUTION FOR INSTALLING A 9117 ON AN LS APPLICATION. UP TO MODEL YEAR 2013 LS APPLICATIONS.	2189












TACH ADAPTER 9117


MAGNETO SIGNAL CONVERTER
9118


DIMMER SWITCH 9114

TACH FILTER 9116

LS TACH ADAPTER & HARNESS 9123







# **TACHOMETER ACCESSORIES**

#### 5211 Replacement Probe

For use w/ 6806 5" Pro-Comp Memory tach for diesel engine tractor pullers.



#### 5259 Replacement Magnet Kit for Dual Channel Playback Tachs.

Includes 2 "Rare Earth" magnets & adhesive compound.



#### 5225 Replacement Rotary Memory Switch

For tachs w/ remote Memory plate. Works w/ recessed switch design.

**NOTE:** Switch assembly only, mounting plate not included.



#### 5265 Extended Length Base

Provides extra clearance for mounting Pedestal Tachs & Gauges in cups on a dashboard.



#### 3209 Replacement Shock Strap Kit

For 5" Tachs w/ Stepdown Case & Most 3 3/4" Pedestal Mount Tachs. (does not fit Mini-Monster Tach)



# 5212 Drive Shaft Sensor (Dual Channel Tach)

For use with Ultimate II/III/DL Dual Channel Playback tachometers.





## **EXTENSION CABLES**

Shift-Lite 3257 3ft. Extension wire w/ connectors



5223 20' Digital Stepper Motor Nitrous Pressure Harness



Ideal for mounting sender on bottle in rear of car. No white wire for factory LED lit gauges.

5252 Wideband Extended Harness, Street/Analog

5253 Wideband Extended Harness, Pro Series

Wideband Extended Harness replaces existing 8' harness with a 25' harness.

5257 Pyrometer Extension Module, Stepper Motor Incandescent Pyrometer Gauges

Due to the incredibly sensitive nature of Auto Meter's high precision Pyrometers, it is critical for the accuracy of the instrument that the length of the probe harness never be modified. Auto Meter's Pyrometer Extension Modules provide an easy and affordable way to extend your harness up to 75' additional feet with no loss in accuracy or response. For use with gauges utilizing 10-pin connector on back of gauge.



5256 Pyrometer Extension Module for Incandencent Lighting (Perimeter Lit) Gauges w/threaded probe wire connections on back of gauge. Not for gauges w/10-PIN connector on back of gauge.

## **WIRING HARNESSES**

2198 Wire Harness, Universal for Tach/Speedo/Electric Gauges, Including LED indicators



**5226 Replacement for Digital Stepper Temperature** 

5227 Replacement for Digital Stepper Pressure

5229 Replacement for MAP sensor (Boost & Boost/Vac).

**5223 20' Digital Stepper Nitrous Pressure Harness**Ideal for mounting sender on bottle in rear of car. No white wire for

Ideal for mounting sender on bottle in rear of car. No white wire for factory LED lit gauges.

5232 8' Replacement for Wideband Pro

5233 Replacement for Digital Stepper Fuel Level

5234 Replacement for Digital Stepper Voltmeter

**5275 Elite Pressure Harness** 

**5276 Elite Temperature Harness** 

5296 EGT Probe and Harness for Elite Series Gauges

5297 EGT Wire Harness For Incandescent Lit Digital Stepper Motor Gauges (No Probe) - use #3249

5298 Wiring Harness, Wideband Air/Fuel Ratio Street/Analog

P19317 Spek-Pro for ECU Gauges (Flying Leads)

P19320 Spek-Pro Boost & Boost/Vac

P19340 Spek-Pro EGT/Pyrometer

P19370 Spek-Pro Temperature

P19372 Spek-Pro Volt

P19373 Spek-Pro Tach/Speedo

P19380 Spek-Pro Fuel, Oil, Water Pressure

#### CONNECTORS

3298 SSE Gauge Connector

2 pack (Does not include wires)



3299 Tach/Speedo Connector

(Does not include wires)





# **GAUGE ACCESSORIES**

#### 3230 Blower Memory Kit

Can be used to add memory function to any boost or blower pressure gauge (air only).

For Extra Water Passage Clearance On All Mechanical Temperature Gauges

**TEMPERATURE ADAPTERS** 

EXTENSION ADAPTERS

Auto Meter & Autogage 2270 1/2" NPT Temp. Extension

2261 Weld-In Adapter

For All Mechanical Temperature Gauges





2271 3/8" NPT Temp. Extension

2260 Weld-In Adapter for 1/8" NPT

(Pyrometer probe, elec. trans., & oil temp.)

## **FUEL PRESSURE ADAPTERS**

#### 3275 Ford Fuel Rail Adapter

1/16" NPT M to -4AN M mech. gauge fuel rail adapter, replaces Schrader Valve assembly.




#### 3280 Ford Fuel Rail Adapter


1/16" NPT M to 1/8" NPT F fuel rail adapter, replaces Schrader Valve assembly. For Elec. Fuel Press. gauges.




#### Auto Meter & Autogage

2263 3/8" Brass NPT Temp Adapter









#### 2276 Banjo Bolt Adapter

12mm Banjo Bolt to 1/8" NPT M, replaces Banjo Bolt on Import under hood fuel filter applications. Dimensions 12mm x 1.25



# -4AN ELBOW FITTINGS

#### 3273 45° Elbow Fitting

-4AN elbow fitting, 45° with swivel nut. Also for use with the new -4AN Fuel Pressure, Brake Pressure, and Nitrous Pressure gauges.



#### 3274 90° Elbow Fitting

-4AN elbow fitting, 90° with swivel nut. Also for use with the new -4AN Fuel Pressure, Brake Pressure, and Nitrous Pressure gauges.




## RIGHT ANGLE FITTINGS

For Auto Meter Mech. Press. and Vacuum Gauges with 1/8" NPT port.

#### 3270 For pressure gauges Using #3, braided stainless steel line.

3271 For pressure gauges Using #4, braided stainless steel line.



# 3278 Blue Aluminum Anodized

Using #4, braided stainless steel line.





# **METRIC ADAPTERS**

For Adapting Oil Pressure and Temperature Gauges to many Foreign and domestic engines.

#### Oil Pressure

2265 MI0xI (M) to 1/8" NPT (F) 2266 MI2xI (M) to 1/8" NPT (F) 2267 MI4xI.5 (M) to 1/8" NPT (F) 2268 MI6xI.5 (M) to 1/8" NPT (F)

2269 1/8" BSPT (M) to 1/8" NPT (F)



**Mechanical Temperature** 2275 MI6xI.5 (M) to 5/8"-18 UNF (F)



**Electric Temperature or Pressure** 

(Must use 2259 sender for short sweep temp gauges)

2277 MI2xI.5 (M) to 1/8" NPT (F) 2278 MI2xI.75 (M) to 1/8" NPT (F)

(Also see LS Install Kit on pg 128)



# **NITROUS / FUEL RESTRICTOR**

Restrict Press. Spikes & Excessive Fluctuations.

3277 Restrictor Fitting, 1/8" NPT M to -4AN M .025" orifice



3279 Fuel Press Snubber / Restrictor

1/8" NPT M to 1/8" NPT F

(Required for '98 and Later Dodge Diesel Apps.)



#### **TUBING / HOSE**

#### 3222 Nylon Tubing, 10ft., 1/8" dia. w/ **Ferrules**

Only for mech. press. gauges up to 200 psi (except fuel press, gauges).



#### 3223 Nylon Tubing, 10ft., 1/8" dia. w/ Fittings & Ferrules

Only for mech. press. gauges up to 200 psi (except fuel press. gauges).



#### 3226 Nylon Tubing, 12ft., 1/8" dia.

For mech. press. gauges (except fuel or brake press, gauges) w ferrules and fittings.



3224 Copper Tubing, 6ft., 1/8" dia.

For mech. press. gauges (except fuel or brake press. gauges).



#### 3227 Braided Stainless Steel Hose,

3ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



#### 3228 Braided Stainless Steel Hose. 6ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



#### 3229 Braided Stainless Steel Hose. 4ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



#### 3234 Braided Stainless Steel Hose. 3ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



#### 3235 Braided Stainless Steel Hose, 4ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



#### 3236 Braided Stainless Steel Hose, 6ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



## TEMPERATURE MANIFOLDS

For Transmission Temperature Gauges 2286 Fits 3/8" O.D. Tubing 2287 Fits 5/16" O.D. Tubing



# **HOSE ADAPTERS**

# 2280 5/8" Heater Hose Adapter

For elec. gauges only

# 2281 3/4" Heater Hose Adapter





For elec. & mech. gauges

## 2283 11/2" Radiator Hose Adapter

For elec. & mech. gauges



# HIGH PRESSURE GAUGE ISOLATO

#### 5282 High Pressure Isolator

For interior mounting of any 100 PSI Auto Meter mechanical pressure gauge. This isolator is rated at 200 psi, working pressure with a maximum of 300 psi. peak. Comes with 4' of



braided hose. NOTE: Compatible with gasoline, oil, and antifreeze. Do not use with alcohol or nitro-methane fuels. Not recommended for 15 PSI gauges.

## **EXHAUST PRESSURE PARTICLE TRAP KIT**

#### 5375 Exhaust Pressure Particle Trap Kit

Traps carbon to eliminate or greatly reduce carbon at the sender or gauge. This will help to ensure a long healthy life of your exhaust pressure gauge and/or sender. User serviceable.



# FUEL LEVEL SENDER

#### 3262 Universal Fuel Level Sender

For 240ΩE/33ΩFull gauge models. Adjustable for 5" - 24" deep tank. Fits standard 5-Bolt mounting flange.



3263 Fuel Sender Adapter

# 6 hole to 5 hole, 36-46 Ford,


# LS GAUGE INSTALL KIT

#### 5284 LS Install Kit\*

Includes 2277, 2268, 2259, and a 10K resistor and LS Gauge Install Guide.




\* See also LS Tach Adapter Harness under Tach Accessories (pg 125)



## REPLACEMENT SENDERS

#### **Pressure**

2229 Sender for 60 PSI Fuel Press & Boost (Full Sweep, I/8" NPT)



2242 100 PSI Short Sweep Elec Oil Press Gauges (Also for Digital Oil Pressure 1,8" NPT)



(For 30/30 Vac/Boost 35 PSI Boost)

P13153 Spek-Pro Pressure Sensor (For 100, 120, 150 PSI/Except Boost)

P13155 Spek-Pro Pressure Sensor (For 15 & 30 PSI Fuel Pressure)

P13113 Spek-Pro Pressure Sensor (For 60 & 100 PSI Boost)

2240 Nitrous & Brake Press. Sender (Full Sweep, 1/8" NPT)

2245 Sender for 15 PSI Fuel Press. & Boost (Full Sweep, I/8" NPT)

2246 Sender for 100 PSI Oil & Fuel (Full Sweep, I/8" NPT)

2247 Boost/Vac 30 in.Hg. - 15 psi Sender

2249 Boost/Vac 30 in.Hg. - 30 psi Sender
(Also for Digital Boost/Vac)

#### Air/Fuel Oxygen Sensors

2243 Wideband O2 Sensor

For Auto Meter Wideband AFR gauges. Not for use with alcohol, leaded, or diesel fueled engines.

2244 Oxygen Sensor Kit

For Narrowband air/fuel ratio (includes sensor, weather pack harness, and weld fitting). Not for use with alcohol, leaded, or diesel fueled engines.

#### Short Sweep Electric Temp.

2258 Short Sweep Elec. Temp. Gauges (250°, 300°, & 340°) <sup>1</sup>/8" NPT w/ <sup>3</sup>/8" & <sup>1</sup>/2" NPT Adapters.

2259 Elec. Cyl. Head Temp. Gauges (340°) (Also Replaces 2258 Sender In Shallow Depth Mountings, I,8" NPT)

#### Digital Stepper Motor & Full Sweep

2252 Digital Stepper Motor & Spek-Pro Temp. Sender

(Also for Digital Temp Gauges 1/8" NPT)

2250 Full Sweep Gauges w/ Black Box (60°- 210°) 1/8" NPT

2251 Harness for Low Temp. Sender #2250

#### **Autogage**

2385 For elec. temp. gauges.

1/8" NPT w/ 3/8" & 1/2" Adapters



# **PYROMETER ACCESSORIES**

#### **EGT Type K Thermocouple Probes**

#### 525 I Replacement Probe Kit

For use w/ Auto Meter Cobalt, C2, ES, GS, NV, Sport-Comp II, Phantom II, Ultra-Lite II, & Factory Match Pyrometer Gauges. Replacement kit includes wiring harness w/ gauge connector.

#### Armored Tip 5249 Probe Kit

Complete Probe kit includes  $\frac{1}{4}$  dia. Stainless Probe w/  $\frac{10}{2}$  ft. wire plus  $\frac{1}{4}$  compression- $\frac{1}{8}$  NPT connector. For perimeter lit and Spek-Pro gauges.



#### Replacement Fitting Kits

Included w/ 5243 & 5244 probes.

5254 1/4"- 1/8" Probe Fitting

1/4" Compression to 1/8" NPT connector fitting & mating 1/8" NPT weld fitting.

5255 3/16"- 1/8" Probe Fitting

3/16" Compression to 1/8" NPT connector fitting & mating 1/8" NPT weld fitting.

# ELECTRIC SPEEDOMETER

For use with all Auto Meter electronic programmable speedometers. Not intended to drive OE speedometers.

#### **5289 GPS Speedometer Module**

Includes Antenna. Converts any Auto Meter electronic speedometer into a GPS speedometer.

#### 5291 Hall Effect Speedometer Sender

%"-18THD, Hall Effect sender, 16 pulse per rev. Includes pass-thru drive for cruise control.



5292 Hall Effect Speedometer Sender Ford Plug-in, Hall Effect sender, 16 pulse per rev. Includes

5290 Universal Speedometer Sensor For drive shaft, axle mount, etc.



5283 GPS Antenna

For Auto Meter GPS Speedometers & 5289 GPS Module.



# PRO-LITE WARNING LIGHT SWITCHES

3241 Pressure Switch 18 PSI, 1/8" NPT.

3242 Pressure Switch 30 PSI, 1/8" NPT.

3243 Pressure Switch 50 PSI, 1/8" NPT.

3246 Temperature Switch 200°F, 1/2" NPT.

3247 Temperature Switch 220°F, 1/2" NPT

May be Single or Dual Terminal



## **BULBS & SOCKETS**

2357 Bulb & Socket 2 Watt For use with 21/16" Auto gage gauges.

2359 Bulb & Socket 2 Watt For use with 25/8" Auto gage gauges.

2388 Bulb & Socket (Package of 2) For use with 11/2" mini gauges.

3211 Bulb & Socket No. 168/4.9 Watt For use with 21/16" and 25%" gauges (steel cases). Also used in some tachometers and speedometers. NOTE: Replaces Old Style Socket

3212 Bulbs & Socket No. 161 & 168/4.9 Watt

> Also used in some tachometers and speedometers. NOTE: Replaces Old Style Socket



For use w/ 3219 socket & the Shift-Lite on 3903 tachometer.

3219 Bulb & Twist In Socket No. 86

Used w/ all 5" Pedestal Tachs w/replacement bulb on control panel (shield) assembly.

3220 Bulb & Socket No. 161/2.7 Watt & No. 194/3.8 Watt & No. 168/4.9 Watt

> For use w/ all Auto Meter gauges in plastic cases (except blue plastic case). That use twist in light socket.

**Old Style Socket** 

# **COLORED LENS KITS**

For Optional Color on Pro-Lite Warning Lights and Shift-Lite Tachs

3250 Blue Lens Kit

Blue lens and blue night cover.

325 I Yellow Lens Kit

Yellow lens and yellow night cover.

3252 Red Lens Kit Red lens and red night cover.

3254 Mini Pro-Lite Cover Kit

Includes blue, yellow, and red boots.

# LIGHT BULB COVERS

For Optional Lighting Color On Most Gauges (Kit Includes 3 Covers)

3207 Blue Kit 3208 Yellow Kit 3214 Red Kit 3215 Green Kit



For Auto Meter gauges (except clocks, A/F ratio, & Autogage), speedometers, & most in-dash tachs w/ Incandescent Light Bulbs. Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, Phantom II, Sport-Comp II, Ultra-Lite II).

# **LED REPLACEMENT BULB KITS**

Upgrade Your Standard Instrument Lighting with Intense LEDs.

Replaces 161, 193, 194, & 168 style wedge base bulbs only.

3284 Red 3285 Green

3286 Blue 3287 Amber

3288 White



For Auto Meter gauges (except clocks, A/F ratio, & Autogage), speedometers, & most in-dash tachs w/ Incandescent Light Bulbs. Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, Phantom II, Sport-Comp II, Ultra-Lite II).

For Auto Meter Pedestal Tachs & Some In-dash Tachometers.

3294 Red 3295 Green

3296 Blue

Replacement Kits for Tachometers using the small twist-in light (#3219) on the front "shield." Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, 3297 Amber Phantom II, Sport-Comp II, Ultra-Lite II).

## MOUNTING CUPS

2 1/16" Auto Meter & Auto gage

For Use With All Current Auto Meter and Autogage 21/16" Gauges

2203 Chrome 2204 Black

2%" Auto Meter

For Use With All 25%" Electric Gauges (will not work with Auto gage).

3201 Chrome 3202 Black

For Use With All 25/8" Mechanical Temperature and Pressure Gauges (will not work with Auto gage).

3203 Chrome 3204 Black

25/8" Pro-Comp Liquid-Filled

For Use With Liquid-Filled Pressure & Temperature Gauges

520 | Chrome 5202 Black

3%" Pro-Comp

For Use With 33/8" In-dash Tach & Electronic Speedometer

5203 Chrome 5204 Black

Real Carbon Fiber

2121 21/16" Gauge Cup

2151 25/8" Electric Gauge Cup

2152 258" Mechanical Gauge Cup

2155 5" Monster Tachometer Cup For 5" Pedestal mount tachs with 33/8" case

Note: May be necessary to trim the length of the mounting

studs on most gauges in order to slide all the way into cup.




















## MOUNTING CUPS CONT'D

21/16" Omni Pod - Lightweight Universal Gauge Mount
For use with all AutoMeter Digital Stepper Motor
and AirDrive gauges.

2205 Black

## **GAUGE PANELS**

For All 21/16" Auto gage & Auto Meter gauges

2236 I-Hole Black Aluminum Panel

2237 2-Hole Black Aluminum Panel

2238 3-Hole Black Aluminum Panel



For All 25/" Auto gage & Auto Meter gauges

3231 I-Hole Black Aluminum Panel

3232 2-Hole Black Aluminum Panel

3233 3-Hole Black Aluminum Panel



# **MOUNTING BRACKETS**

Quality molded black composite mounting brackets w/ aluminum thumb nuts and washers. Sold in package of three.

2230 Bracket Kit Assy., Auto Meter 21/16" gauges.


3245 Bracket Kit Assy., Auto Meter 25%" gauges.



Aluminum mounting brackets w/ 8-32 aluminum thumb nuts and washers. Sold in package of three.

2225 Bracket Kit Assy., Auto Meter 21/16" gauges.

2226 Bracket Kit Assy., Auto Meter 25%" gauges.





## **ANGLE RINGS**

Quality molded black composite rings angles gauges 15 degrees towards driver. Sold in package of three. Requires modifying mounting bracket

2234 For Auto Meter or Autogage 21/16" gauges.

3244 For Auto Meter or Autogage 25/8" gauges.



## **POD/PILLAR FASTENERS**

For use on Gauge Works Pods and Pillars

3281 Package of 10 3282 Package of 100



# TIRE PRESSURE GAUGES



There are few things that affect the performance of your vehicle as much as your tire pressure. These professional grade tire pressure gauges from AutoMeter are built with the same exacting attention to detail you've come to expect from all of their gauges. Unparalleled accuracy and durability combine to make one of the best bang for the buck values in the performance world. A durable carrying case is included with each gauge.

# QUALITY PRODUCTS AND FEATURES FOUND IN EVERY TACHOMETER



# Also Found in QUALITY PERFORMANCE GAUGES

Every Auto Meter gauge is designed, assembled, and calibrated to the exacting standards today's high



# PATENTED BATTERY TESTER SYSTEMS

Mounting Bracket

These Battery Testers Systems are protected by one or more of the following Patents: U.S. Patent No. D442,503S, U.S. Patent No. 6,061658, U.S. Patent No. 6,359,442 B1, U.S. Patent No. 6,771,073 B2, U.S. Patent No. 7,990,155, U.S. Patent No. 7,909,662, U.S. Patent No. 7,736,201



Monster Bezel

Shock Strap

# PATENTED TACHOMETER TECHNOLOGY FOR HIGH Performance

These products may utilize one or more of the following Patented Technologies: U.S. Patent No. 5905,374, U.S. Patent No. 5982,168, U.S. Patent No. 6,137,399, U.S. Patent No. 6,215,298 B1, and U.S. Patent No. 7,012,514 Australian Patent No. AU 772842, New Zealand Patent No. 518824



# A.M.P. IS A PROUD MEMBER/SPONSOR OF THESE ORGANIZATIONS SEMA, PWA, NHRA, IHRA, TEAM LUCAS, GOODGUYS AUTOCROSS, NMRA, AND NMCA

















#### Trademarks:

Auto Meter Phantom Battery Extender Pro Parts Wide Angle Dial

Trade Names

USPTO Registration No. 1,683,615 USPTO Registration No. 1,875,140 USPTO Registration No. 2,756,383 Shock Strap Supplemental Registration No. 2,564,743 USPTO Registration No. 2,652,966 USPTO Registration No. 3,506,818

Auto Meter Logo Auto Meter logo Ultra-Lite Monster Bezel Sully Wedgie

USPTO Registration No. 3,076,477 USPTO Registration No. 1,732,643 USPTO Registration No. 1,967,635 USPTO Registration No. 3,251,019 USPTO Registration No. 3,455,688 USPTO Registration No. 2,690,587

Auto gage Pro-Lite Super Bezel Nexus Spek


USPTO Registration No. 1,497,472 USPTO Registration No. 2,370,310 USPTO Registration No. 2,885,435 USPTO Registration No. 3,274,254 USPTO Registration No. 3,105,738

#### Auto Meter Products, Inc. holds the following trademarks and tradenames:

C2, Carbon Fiber, Chosen by the Pro's, D-PIC, Cruiser and Crusier AD, Golden Oldies, Mini-Monster, Monster Gauges, Monster Tach, NEXUS, NV, Prestige Series Antique Ivory and Black Diamond, Power • Precision • Passion, Elite, Pro-Comp, Pro-Shift, Pro-Tech, Sport-Comp, II, Sport-Comp II, PC, Phantom, Phantom II, Ultra Lite, Ultra Lite II, Ultra Lite Pro, Pro Comp Pro, Ultimate Silver, Z-Series, Cobalt, GS, ES, American Muscle, American Platinum, Antique Beige, Arctic White, Designer Black, Designer Black II, Old Tyme White, Old Tyme White II, Old Tyme Black, Ecometer, Gaugeworks, DPSS, Digital Pro-Shift System, Inter-Act Pack, Stack, Traditional Chrome, Cobra, Ultra-Nite, MCX and Inside Every Winning Ride.

# **SPECIFICATIONS**

Sizes shown are largest expected size. Sizes may vary slightly in each individual series. Dimensions are for gauge size only. Please allow 1-3 inches for Fittings & Capillary Tubing. For individual questions or further information on installation procedures, contact our Service Department at (866) 248-6357. Instruments include all necessary hardware and 12V lighting unless otherwise noted.

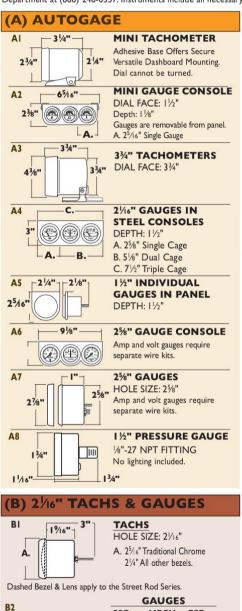

SSE

+ B.

A. 21/4"

B. 11/2

C. 25/8

A. 21/4"

B. 113/16

C. 27/8

MECH

A. 21/4"

B. 11/2

C. 25/8

SSE (LED) MECH (LED)

A. 21/4"

B. 113/16


C. 27/8


ESE

A. 21/4"

B. 11/2

C. 25/8

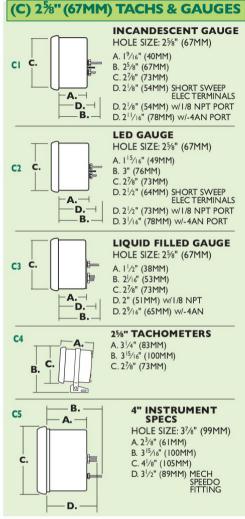



# **SPECIFICATIONS**


# (E) 338" TACH, SPEEDO, & GAUGES





IN-DASH SPEEDO/TACH **COMBO & QUAD GAUGES** 


HOLE SIZE: 33/8" A. 21/8" B. 31/2" C. 33/4"



**IN-DASH MECH SPEEDO** WITH FACTORY INCANDESCENT LIGHTING

HOLE SIZE: 33/8"

Speedometer Shown D. 313/16"




#### **IN-DASH MECH** SPEEDO/W FACTORY LED LIGHTING

HOLE SIZE: 33/8" A. 23/8"


B. 31/2"

C. 31/2" Speedometer Shown D. 313/16"


# (F) 3¾" TACHOMETERS





# TACHS AND SPEEDOS




# (G) 5" TACHS AND SPEEDOS







#### SPEK-PRO



# **APPAREL**









0216 Auto Meter



0207 0451 0453 0208



0456

Auto Meter 0213

Auto Meter 0214

0217

Can Koozie

JACKET	DETAILS	MODEL NUMBER
Black Letterman	BLACK WOOL/LEATHER, GRAY LOGOS, SIZE S, M, L, XL, 2X	0415
SHIRTS	DETAILS	MODEL NUMBER
Monster T-Shirt Adult	SIZES: S, L, XL, 2X	0401
Monster T-Shirt Child	SIZES: S, L	0402
No Imitations T-Shirt	SIZES: S, M, L, XL, 2X	0410
Retro-Ringer T-Shirt	SIZES: L, XL	0414
Black Logo T-Shirt	SIZES: S, M, L, XL, 2X	0422
Dedenbear T-Shirt	SIZES: M, L, XL, 2X	0421
HATS	DETAILS	MODEL NUMBER
Black, Trucker	EMBROIDERED COTTON TWILL MESH	0430
Black, Competition	EMBROIDERED TIGHT WOOL KNIT	0436
Black Flame	BRUSHED COTTON, VELCRO CLOSURE	0438
Black w/ Half Flame	BRUSHED COTTON, VELCRO CLOSURE	0442
Black Nu-Fit Hat	FITTED HAT SIZES S-M OR L-XL	0439
DECALS	DETAILS	MODEL NUMBER
Data Acquisition	9" CONTINGENCY LOGO, I PAIR	0216
Data Acquisition	19" FENDER/TRAILER CONTINGENCY LOGO, 1 PAIR	0220
Racing Contingency	9" CONTINGENCY LOGO, I PAIR	0207
Small Assorted Sizes	4" AND SMALLER CONTINGENCY LOGOS, I PAIR	0208
Super Size	19" FENDER/TRAILER, CONTINGENCY LOGO, 1 PAIR	0209
Vinyl Black	8" BLACK VINYL CORPORATE LOGO, I PAIR	0214
Vinyl White	8" WHITE VINYL CORPORATE LOGO, I PAIR	0213
MISC.	DETAILS	MODEL NUMBER
Banner	3FT. COMPETITION LOGO, PLASTIC BANNER	0212
Banner	6FT. COMPETITION LOGO, PLASTIC BANNER	0217
Cloisonne Hat Pin	COMPETITION LOGO	0453
Jacket Patch	4" EMBROIDERY, COMPETITION LOGO	0451

HIGH QUALITY FOAM, COMPETITION LOGO











Allow 3-4 Weeks For Delivery

0456


# INDEX

111	ИL	Ŀ	Λ	
0207-0220 .				135
0401-0456.	• • • •			135
1100-1196 .				
1100-1196 .				
1200-1298.				
1202-1299.				69
1200-1297.				65 80
1288-M 1300-1399 .				90-91
1302-1390.				
1300-00804	I-139	8-0	0408	98
1302-M, 13				
1403-1499.	• • • •		• • • •	. 90-91
1412-1490 . 1421-M, 14	78-N	1		51
1501-1595.	0-1	v1 .		. 90-91
1501-1593.				. 86-87
1601-1699				90-91
1602-1692.		٠		85
1602-M, 16				
1708-1798 . 1708-1796 .				. 90-91
1803-1899 .				
1809-1890 .				84
1809-1890 . 1809-M, 18	87-N	Λ.		65
18016-1802	24			121
1901-1995.				. 90-91
1901-1993 . 2000-2098 .		• • •		88-89
2001-2098				. 70-75
2001-2098 . 2121, 2151-	2152	2, 2	155.	120
2125-2143.				117
2130-2143 . 2121-2155 .				112
2121-2155. 2159-2160,	216	2 21	62	20, 130
2159-2164.	2102	2-21	. 60	131
2172-2180				124
2189				125
2203-2204.			1	20, 130
2205				131
2207, 2208 2225-2230 .	• • • •			131
2229-2259				129
2234				131
2236-2238.			1	20, 131
2243 2260-2278.				131
2280 2282				129
2286, 2287 2300-2399 2300, 2305, 2323-2396 2347-2399				128
2300-2399.			1:1:	105
2300, 2305,	231	3-2	362.	102
2347-2399				103
2357, 2359,	238	8 .		130
2385				129
2357, 2359,	238	8.		130
2401-2499 . 2421, 2433, 2 2514-2592 .	2490	249	20. 24	04 62
2514-2592	2400,	240	)), <u>4</u> 9	63
2532, 2592				62
2601-2699.				61
2620-2699.	• • • •			60
2681 2888- 2894 2893, 2895, 2897				. 13, 39
2893, 2895,	289	7 .		63
2897				62
3201-3204.			1	20, 130
2897 3201-3204. 3201-3220. 3209				130
3209			1	128
3230				127
3231, 3232,	323	3.	1	20, 131
3238-3254.			1	22, 123
3222-3236 . 3230	324	υ.		120
3244 3245				131
3244, 3245 3250-3252,	3254	4	1	22, 130
3257 3262, 3263 3270-3280.				126
3262, 3263				128
3270-3280.				121
3284-3297	• • • •			129
3281, 3282 3284-3297 . 3298, 3299				126
36				

3301-339150 3332, 3363, 339149
3303-M-3363-M50, 51, 65
3301-J-3322-J 50, 65
3301-J-3322-J 50, 65 3359, 3378
33794, 29
3381 15, 29 3387-3389
3387-3389123
3401-348450
343149 3401 I 3421 I 50 45
3401-j-3421-j
3401-3464
3522-M-3543-M 50, 65
3610-369929
3631, 3652, 3680-369928
3603-00406-3699-0040698
3707, 3781, 3788 47
3542-181-3545-181
3010-3077
3831, 3853, 3878-389936
3900-399551 3904, 3982,3989, 3990, 399149
3911
3900-399551
3966, 3967, 3980 51
3964, 3965, 3966,3967 95
3987-M
3964-3965 47, 95 3900-3995 51 3966, 3967, 3980 51 3964, 3965, 3966,3967 95 3987-M 51,65 4211-4241 64 4301-4399 46-47
4301-4399
4332, 4352, 4357 45 4303-M-4363-M 46-47, 65
43784
4381 15
4387-4389 123 4401-4499 46-47 4403, 4480-4498 45 4421-1 46, 65 4331-M, 4487-M 47, 65
4401-4499
4403, 4480-449845
4421-J
4431-M, 4487-M 47, 65 4489-M
4511-4594
4701-479857
4///-4/98
4777-479856 4787-M65
4///-4/98
4787-M
4787-M. 65 4801-4899 .57 4832, 4889, 4899, 4899 .56 4910-4999 .27 4931, 4953, 4980-4999 .26 5152-5189 .59 5160, 5161, 5189 .59 5201-5204 .120, 130
4787-M. 65 4801-4899 .57 4832, 4889, 4899, 4899 .56 4910-4999 .27 4931, 4953, 4980-4999 .26 5152-5189 .59 5160, 5161, 5189 .59 5201-5204 .120, 130
4787-M. 65 4801-4899 .57 4832, 4889, 4899, 4899 .56 4910-4999 .27 4931, 4953, 4980-4999 .26 5152-5189 .59 5160, 5161, 5189 .59 5201-5204 .120, 130
4787-M. 65 4801-4899 .57 4832, 4889, 4899, 4899 .56 4910-4999 .27 4931, 4953, 4980-4999 .26 5152-5189 .59 5160, 5161, 5189 .59 5201-5204 .120, 130
4787-M. 65 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119
4787-M. 65 4801-4899. 57 4832, 4889, 4898, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120
4787-M. 65 4801-4899. 57 4832, 4889, 4899, 4899 .56 4910-4999. 27 4931, 4953, 4980-499926 5152-5189 .59 5160, 5161, 5189 .59 5201-5204 .120, 130 5211, 5212, 5225, 5259, 5265 .125 5223-5298. 126 5283-5292 .129 5285, 5286, 5287 .118 5285. 119 5288. 120 5312-5314 .123
4787-M. 65 4801-4899 57 4801-4899 56 4910-4999 27 4931, 4953, 4980-4999 26 5152-5189 59 5160, 5161, 5189 59 5201-5204 120, 130 5211, 5212, 5225, 5259, 5265 .125 5223-5298 126 5283-5292 129 5285, 5286, 5287 118 5285 119 5288 120 5312-5314 123 5314 95 5320-5321, 5329-5335 122
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95
4787-M. 65 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 121 5343-5344, 5348-5349. 122 5333-5344, 5348-5349. 122 5333-5344, 5348-5349. 122 5333-5344, 5348-5349. 122
4787-M. 65 4801-4899. 57 4801-4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5231. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 121 5343-5344, 5348-5349. 122 5333-5344, 5348-5349. 122 5333-5344, 5348-5349. 122 5333-5344, 5348-5349. 122
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 53575. 128 5380. 118, 119
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54-65
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54-65
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54-65
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5315. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54, 65 5770. 4 5780-57895-00406 (07)
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5315. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54, 65 5770. 4 5780-57895-00406 (07)
4787-M. 65 4801-4899. 57 4801-4899. 57 4832, 4889, 4899, 4899. 56 4910-4999. 27 4931, 4953, 4980-4999. 26 5152-5189. 59 5160, 5161, 5189. 59 5201-5204. 120, 130 5211, 5212, 5225, 5259, 5265. 125 5223-5298. 126 5283-5292. 129 5285, 5286, 5287. 118 5285. 119 5288. 120 5312-5314. 123 5314. 95 5320-5321, 5329-5335. 122 5323. 95 5321-5314. 121 5249-5255. 129 5282, 5284. 128 5312-5313. 121 5249-5255. 129 5282, 5284. 128 5312-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5343-5344, 5348-5349. 122 5350-5351. 123 5345-5344, 5348-5349. 122 5350-5351. 128 5380. 118, 119 5381. 117 5401-5492. 59 5421, 5432, 5469, 5492. 58 5606-5697. 21 5652, 5655, 5678-5697. 20 5610. 59 5701-5795. 54-55 5710, 5731, 5791. 53 5703-M-5763-M. 54-65

5831,	588	80-	58	8	9	9											53
5887-	M.													5	5		65
5910- 5931,	599	99.															39
5931.	595	53.	5	9	7	8	-	5	9	9							38
5903-	M-	594	18	3-	١	Ā											65
5978.										•						٠	6
6001-	601	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	92
6102	410	12	•	•	•	•	•	•	•								
6103-	(11	· ·						•									
6107,	013	00,	0	1	>	14										,	34
6103-	IVI-	614	łč	)-	N	/1	,	•	•	•	•	•		3	4,	,	65
6181.																•	13
6181. 6187, 6280-	618	88														1	23
6280-	629	99.															
6300-	639	99.															6
6310,	638	87,	6	3	9	7											66
6500-																	6
6588,			6	5	9	99											66
6601.				ं				•	•	•							59
	٠.,		•	•	•	•		•	•	•	•	•	•		•	•	4
6604. 6847-	OFF	70=		•	•		•	•	•	•	•	•	•				7
6847- 6606-	057	705							-			-		4		)-	2
6606-	057	05	-6	50	54	ł/	-	U	5	/	U	5					2.
0001-	OOL	" .						٠					٠			٠	U,
6857.																	58
6832,	683	34															4
6834-					-												52
6847-																	20
6882-		7	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9
		00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	6
6900-	695	9.														•	6
6937,																	
7020-	703	52.															12
7033-	705	57.														1	13
7040.												1	0	0	,	1	17
7041.																1	17
	708																10
7070-																	2
		10.	•	•	•	•		•	•	•	•	•	•	•	•	1	11
7091-		0.		•	•	•		•	•				•	•	•	1	10
7103- 7131,	719	12.															4
7131,	713	53,	1	1	1	8	,	1	1	9	2						40
7187, 7288-	718	88														1	23
7288-	729	99.											٠				4
7303-	739	)2	120	92			37										43
7331,	735	3 7	73	7	8	,	7	30	90	)	7	3	9	2			4
7387,	700	00												-	•		
																	2
7400	730	00		•												1	23
7488-	99.													4	2	!-	43
7488- 7510-	99. 759	99.	•	•	•	•	•	•	•					4	2		43
7488- 7510- 7531,	99 . 759 758	 99 . 53,	•	•	•	•	•	•	•					4			43 31 30
7488- 7510- 7531, 7601-	99 . 759 758	 99. 53,	•	•	•	•	•	•	•					4			43 30 29
7488- 7510- 7531, 7601- 7684.	99. 759 755 769	53, 51.	. 7	5					5	9				4 2			43 30 20 20
7488- 7510- 7531, 7601- 7684. 7701-	99. 759 755 769	53, 51.	. 7	5					5	9				4 2			43 30 20 20
7488- 7510- 7531, 7601- 7684. 7701-	99. 759 755 769	53, 91.	. 7						5'					. 2			43 30 30 29 28 27
7488- 7510- 7531, 7601- 7684. 7701- 7731.	99 . 759 759 769 	53, 51. 34.	. 7						5'					. 2			43 30 29 28 27 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801-	99 . 759 759 769  778	53, 91. 34.	7						5.					4 2			43 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832.	99. 759 759 769  778	53, 91. 34. 01.	7						5.					4			43 31 30 29 20 20 20 20 30
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901-	99. 759 759 769  778  789	53, 91. 34. 01.	7						5.					4			43 31 30 29 20 20 20 20 30
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931.	99. 759 759 769  778  789	 99. 53, 91.  91.												4 2			43 31 31 22 22 22 23 34 34
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001-	99	 99 53, 91 91 91	7						5.					4	28.		43 30 20 20 20 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032,	99 759 759 769  778  789  809 809	99. 53, 91. 34. 91.	7						5.					4	28.		43 31 31 22 22 21 21 21 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001-	99 759 759 769  778  789  809 809	99. 53, 91. 34. 91.	7						5.					4	28.		43 30 20 20 20 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 8404-	99.759 759 769  778  789  809 808 838 849	99 . 53, 91 .							5.		8			4			43 31 31 22 22 23 34 34 25 24 25 26 27 27 28 27 28 27 28 28 28 28 28 28 28 28 28 28 28 28 28
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 8404-	99.759 759 769  778  789  809 808 838 849	99 . 53, 91 .	7 8						5					4			43 31 31 22 22 23 34 34 25 24 25 26 27 27 28 27 28 27 28 28 28 28 28 28 28 28 28 28 28 28 28
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 8404- 8504-	99 759 769 778 789 799 809.809.838	99 . 53, 91 .	7 8							9				4	3	<u>}</u>	43 30 20 20 20 20 30 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 8404- 8504- 9105.	99 759. 759 778 789 799 809. 808. 838. 849. 859	99. 53, 91. 34. 91. 91. 98. 53, 86.	7 8						5					4	128	!- · · · · · · · · · · · · · · · · · · ·	43 30 29 28 20 20 30 30 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 8504- 9105. 9114-	99 759. 759 778 789 799 809. 808. 838. 849. 859	99. 53, 91. 34. 91. 91. 98. 53, 86.	7 8						5					4	33,	!- · · · · · · · · · · · · · · · · · · ·	43 30 29 20 20 20 30 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 7931. 8001- 8032, 8304- 9105. 9114- 9119.	99 759 769 778 789 799 809.809.838.849.859	99	7											4	3,	2	4: 3: 3: 2: 2: 2: 2: 3: 3: 2: 2: 1: 1: 1: 1: 2: 2: 2: 2: 2: 2: 2: 2: 2: 2: 2: 2: 2:
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 8032, 8304- 8504- 9105. 9114- 9133-	99 759 778 778 789 799 809.809.838.849 912	99. 53, 91. 34. 91. 91. 98. 53, 86. 95.	7											331	33,	2	43 30 29 20 20 20 20 20 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 8032, 8304- 8504- 9105. 9114- 9133-	99 759 778 778 789 799 809.809.838.849 912	99. 53, 91. 34. 91. 91. 98. 53, 86. 95.	7											331	33,	2	43 30 29 20 20 20 20 20 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 8032, 8304- 8504- 9105. 9114- 9133-	99 759 778 778 789 799 809.809.838.849 912	99. 53, 91. 34. 91. 91. 98. 53, 86. 95.	7											331	33,	2	43 30 29 20 20 20 20 20 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 8032, 8304- 8504- 9105. 9114- 9133-	99 759 778 778 789 799 809.809.838.849 912	99. 53, 91. 34. 91. 91. 98. 53, 86. 95.	7											331	33,	2	43 30 29 20 20 20 20 20 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 7801- 7832. 7901- 8032, 8304- 8504- 9105. 9114- 9133-	99 759 778 778 789 799 809.809.838.849 912	99. 53, 91. 34. 91. 91. 98. 53, 86. 95.	7											331	33,	2	43 30 29 20 20 20 20 20 30 30 20 20 20 20 20 20 20 20 20 20 20 20 20
7488- 7510- 7531, 7601- 7684. 7701- 7731. 801- 8032, 8032- 8304- 8504- 9105. 9119- 9119. 9119. 10000 10000 10000	99.759 759 769  778  789  809 808 838 849 859  912 									900000000000000000000000000000000000000				33	33,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4333 3022 2222 2222 3034 343 434 1111 1111 11111 111111
7488- 7510- 7531, 7601- 7684. 7701- 7731. 801- 8032, 8032- 8304- 8504- 9105. 9119- 9119. 9119. 10000 10000 10000	99.759 759 769  778  789  809 808 838 849 859  912 									9				33	33,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4333 3022 2222 2222 3034 343 434 1111 1111 11111 111111
7488- 7510- 7531, 7601- 7684. 7701- 7731. 801- 8032, 8032- 8304- 8504- 9105. 9119- 9119. 9119. 10000 10000 10000	99.759 759 769  778  789  809 808 838 849 859  912 									9				33	33,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4333 3022 2222 2222 3034 343 434 1111 1111 11111 111111
7488- 7510- 7531, 7601- 7684. 7701- 7731. 801- 8032, 8032- 8304- 8504- 9105. 9119- 9119. 9119. 10000 10000 10000	99.759 759 769  778  789  809 808 838 849 859  912 									9				33	33,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4333 3022 2222 2222 3034 343 434 1111 1111 11111 111111
7488-7510-7510-7510-7510-7510-7510-7510-7510	99.759 759 769  778  789  809 838 849 859  913  913								000					4	3,	2	4333 330 222 222 222 223 333 442 224 11111111111
7488-7510-7510-7510-7510-7510-7510-7510-7531, 7601-7684. 77011-7731. 7801-7832. 7901-7832. 8304-8504-9105. 9114-9119. 10002 10050 100000 10000000000000000000	99 759 759  778  789  809 808 838 849 859  913  913  100 												16.11	4	3,	2	433330222222222222222222222222222222222
7488-7510-7510-7510-7510-7510-7510-7510-7531, 7601-7684. 77011-7731. 7801-7832. 7901-7832. 8304-8504-9105. 9114-9119. 10002 10050 100000 10000000000000000000	99 759 759  778  789  809 808 838 849 859  913  913  100 												16.11	4	3,	2	433330222222222222222222222222222222222
7488-7510-7510-7510-7510-7510-7510-7510-7510	99 759 769  778  789  809 808 838 849 859  913  100	99. 53, 91. 91. 91. 91. 98. 95. 95. 95. 93. 93. 91. 91. 91. 91. 91. 91. 91. 91	7							990000000000000000000000000000000000000	8			4	33,	2	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500000000000000000000000000000000000000		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500000000000000000000000000000000000000		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-7531, 7601-7531, 7601-7531, 7601-7684, 7701-7731. 7801-77931. 8001-7931. 8001-9931-9931-9913-9915. 9914-9919. 10002 10050 10002 10050 10100 10110 10183 10200	99.759 759 769 778 7789 799 809 809 838 849 859 913 100 100 3-100 -100 -100 -100 -100		7						500		8			4	28.66	2- · · · · · · · · · · · · · · · · · · ·	43333332222222222222222222222222222222
7488-7510-7531, 7601-17510-7531, 7601-7531, 7601-7531, 7601-7731. 8011-7832. 7901-7731. 8032, 8304-8504-9119. 10003100031000310003100031000310003100	99 75 76 778 778 789 799 809 809 912 913 100 1		7											4	128.88	2	433333228 22222222233334 34222224 111111111111111
7488-7510-7531, 7601-7531, 7601-7531, 7601-7731. 7684. 801-7731. 7801-7832. 7901-7931. 8001-8032, 8304-8504-89105. 9114-10000100001010000101000010100001010000101	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333
7488-7510-7531, 7601-7531, 7601-7531, 7601-7731. 7684. 801-7731. 7801-7832. 7901-7931. 8001-8032, 8304-8504-89105. 9114-10000100001010000101000010100001010000101	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333
7488-7510-7531, 7601-7531, 7601-7531, 7601-7731. 7684. 801-7731. 7801-7832. 7901-7931. 8001-8032, 8304-8504-89105. 9114-10000100001010000101000010100001010000101	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333
7488-7510-7531, 7601-7531, 7601-7531, 7601-7731. 7684. 801-7731. 7801-7832. 7901-7931. 8001-8032, 8304-8504-89105. 9114-10000100001010000101000010100001010000101	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333
7488-7510-7531, 7601-7531, 7601-7531, 7601-7731. 7684. 801-7731. 7801-7832. 7901-7931. 8001-8032, 8304-8504-89105. 9114-10000100001010000101000010100001010000101	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333
7488-7510-7531, 7601-17510-7531, 7601-7531, 7601-7531, 7601-7731. 8011-7832. 7901-7731. 8032, 8304-8504-9119. 10003100031000310003100031000310003100	99. 759 759 769 778 778 7789 809 808 838 849 912 913 910 -100 -100 -100 -100 -100 -100 -100	99.53, 91	7											4	12	2	43333333333333333333333333333333333333

15005 15105	110
15003 15007-15105	107
15018	118
15018	118
15022. 15100-15199. 15200-15213. 15200-15205. 108, 15203, 15204, 15212, 15213. 15210-15222. 15218, 15220. 15218, 15219, 15220. 15219.	118
15100-15199	114
15200-15213	11/
15200-15215	100
15200-15205106,	109
15203, 15204, 15212, 15213.	.106
15210-15222	. 115
15218, 15220	117
15218, 15219, 15220	119
15219	118
15219	115
15500-15520	110
15319. 15306, 15307, 15314, 15319. 15306-15319.	. 116
15306, 15307, 15314, 15319.	108
15306-15319	109
15411-15415	115
17100-17121	11/
17100-17121	105
17104-17121	107
17200-17219	. 114
17200-17219	106
17212-17213	108
17302-17329	116
17302-17329	100
1/306-1/323108,	109
18016-18018	.106
18022-18024	107
20007	121
20009-20034	119
20007	119
20019, 20020	110
20026, 20029, 20032	110
20100-20191	. 114
201004-201015	.02
201004-201019	63
201975. 20200-20202. 20240.	63
20200 20202	114
20200-20202	114
20240	. 115
20400-20434	. 114
20400-20434	115
20590-20593	115
20590-20593 20600-20631 20800-20853	114
20000 20051	115
20000-20055	. 113
22110-22133	. 114
22110-22133	. 115
22241-22261	. 115
22401 22421	
22401-22401	114
22592 22593	114
22592, 22593	114
22401-22431 22592, 22593 22610-22686	115
22592, 22593 22610-22686 22800-22813	115
22401-22431 22592, 22593 22610-22686 22800-22813 233904-233911	115
22800-22813	. 114 . 115 . 115 . 115 . 105
22800-22813	. 114 . 115 . 115 . 115 . 105
22800-22813	. 114 . 115 . 115 . 115 . 105
22800-22813 233904-233911 233911 23410 23674, 23680, 23690	. 114 . 115 . 115 . 105 . 105 . 115
22800-22813 233904-233911 233911 23410. 23674, 23680, 23690	. 114 . 115 . 115 . 105 . 105 . 115
22800-22813 233904-233911 233911 23410. 23674, 23680, 23690	. 114 . 115 . 115 . 105 . 105 . 115
22800-22813 233904-233911 233911 23410. 23674, 23680, 23690	. 114 . 115 . 115 . 105 . 105 . 115
22800-22813 233904-233911 233911 23410. 23674, 23680, 23690	. 114 . 115 . 115 . 105 . 105 . 115
22800-22813 233904-233911 233911 23410 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48000, 48011	. 114 . 115 . 115 . 105 . 105 . 115 . 115 . 115 . 121
22800-22813 233904-233911 233911 23410 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48000, 48011	. 114 . 115 . 115 . 105 . 105 . 115 . 115 . 115 . 121
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202	. 114 . 115 . 115 . 105 . 105 . 115 . 115 . 115 . 120 . 119
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800 23902, 23904, 23906 48000-48008 48010, 48011 49102 49202 50100.50101, 50102	. 114 . 115 . 115 . 115 . 105 . 105 . 115 . 115 . 115 . 121 . 120 . 119
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800 23902, 23904, 23906 48000-48008 48010, 48011 49102 49202 50100.50101, 50102	. 114 . 115 . 115 . 115 . 105 . 105 . 115 . 115 . 115 . 121 . 120 . 119
22800-22813 233904-233911 233911 102, 23410 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038	1114 1115 1115 1105 1105 1115 1115 1115
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089	1114 1115 1115 1105 105 1115 1115 1115 1
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089	1114 1115 1115 1105 105 1115 1115 1115 1
22800-22813 233904-233911 102, 23410 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48010, 48011 49102 49202 50100, 50101, 50102 880011-880038 880074-880089 880106-880118	1144 1155 1155 1055 1055 1155 1155 1155
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260	1144 1155 1155 1055 1055 1155 1155 1155
22800-22813 233904-233911 233911 233911 23410 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260	1114 115 115 105 105 115 115 115 115 121 120 119 116 .21 .96 .97 .97
22800-22813 233904-233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48000, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 88016-880118 880240-880260 880248-880252 880281, 880314, 880400	1114 1115 1115 1105 1105 1115 1115 1115
22800-22813 233904-233911 102, 233911 102, 23410. 23674, 23680, 23690 23800. 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011. 49102. 50100,50101, 50102 8199-05702. 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252. 880281, 880314, 880400 880351-880355	1114 1115 1115 1105 1105 1115 1115 1115
22800-22813 233904-233911 102, 233911 102, 23410. 23674, 23680, 23690 23800. 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011. 49102. 50100,50101, 50102 8199-05702. 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252. 880281, 880314, 880400 880351-880355	1114 1115 1115 1105 1105 1115 1115 1115
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100, 50101, 50102 8199-05702 880011-880089 880074-880260 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880410	1114 1115 1115 1115 1105 1115 1115 1115
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100, 50101, 50102 8199-05702 880011-880089 880074-880260 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880410	1114 1115 1115 1115 1105 1115 1115 1115
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 88074-88089 88016-880118 880240-880260 880248-880252 880218, 880314, 880400 880351-880355 880359 880428-880431	1114 1115 1115 1115 1115 1115 1115 1115
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 88074-88089 88016-880118 880240-880260 880248-880252 880218, 880314, 880400 880351-880355 880359 880428-880431	1114 1115 1115 1115 1115 1115 1115 1115 1115 1119
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48000, 48010, 48011 49102 49202 50100, 50101, 50102 8199-05702 880011-880089 880074-880260 880248-880252 880218, 880314, 880400 880351-880355 880359 880448-88048 880448-88048 880448-88048 880448-88048 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048	. 1144 . 115 . 115 . 115 . 105 . 115 . 115 . 115 . 115 . 121 . 120 . 119 
22800-22813 233904-233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48000, 48010, 48011 49102 49202 50100, 50101, 50102 8199-05702 880011-880089 880074-880260 880248-880252 880218, 880314, 880400 880351-880355 880359 880448-88048 880448-88048 880448-88048 880448-88048 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048	. 1144 . 115 . 115 . 115 . 105 . 115 . 115 . 115 . 115 . 121 . 120 . 119 
22800-22813 233904-233911 102, 233911 102, 23470, 23680, 23690 23800, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880174-880089 880116-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880444-880431 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048 8804410, 880484 880444-88048 8804410, 8000, 5000, 5000 DL10110U-DL1066U P1011175, P10180	1145 1155 1155 1055 1055 1155 1155 1155
22800-22813 233904-233911 102, 233911 102, 23470, 23680, 23690 23800, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880174-880089 880116-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880444-880431 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048 880444-88048 8804410, 880484 880444-88048 8804410, 8000, 5000, 5000 DL10110U-DL1066U P1011175, P10180	1145 1155 1155 1055 1055 1155 1155 1155
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48009-48008 48009-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880248-880259 880410 880424-880431 880424-880431 880444-880448 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190	1115 1115 1115 105 115 115 115 115 115 1
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48009-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880410 880424-880250 880359 880410 880444-880488 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P101190 P12467 P13113, P13115	1115 115 115 115 105 115 115 115 115 115
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48009-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880410 880424-880250 880359 880410 880444-880488 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P101190 P12467 P13113, P13115	1115 115 115 115 105 115 115 115 115 115
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48009-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880410 880424-880250 880359 880410 880444-880488 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P101190 P12467 P13113, P13115	1115 115 115 115 105 115 115 115 115 115
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48009-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880359 880410 880424-880250 880359 880410 880444-880488 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P101190 P12467 P13113, P13115	1115 115 115 115 105 115 115 115 115 115
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880428-880431 880444-880489 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190 P12467 P13113, P13115 P13153, P13115 P13153, P13155 P19317, P19320, P19340 P19370, P19372, P19373	1115 1115 1115 1115 1115 1115 1115 111
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880428-880431 880444-880489 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190 P12467 P13113, P13115 P13153, P13115 P13153, P13155 P19317, P19320, P19340 P19370, P19372, P19373	1115 1115 1115 1115 1115 1115 1115 111
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880428-880431 880444-880489 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190 P12467 P13113, P13115 P13153, P13115 P13153, P13155 P19317, P19320, P19340 P19370, P19372, P19373	1115 1115 1115 1115 1115 1115 1115 111
22800-22813 233904-233911 233911 233911 233911 233911 233674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 88016-880118 880240-880260 880248-880252 880281, 880314, 880400 880351-880355 880351-880355 880410 880424-880448 880444-880448 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190 P12467 P13113, P13115 P13153, P13115 P13153, P13115 P19317, P19320, P19340 P19370, P19372-P19373 P19380 P230328-P346328	1115 1115 1115 1115 1115 1115 1115 111
22800-22813 233904-233911 233911 233911 233911 233911 23674, 23680, 23690 23800 23900, 23902, 23904, 23906 48000-48008 48009, 48010, 48011 49102 49202 50100,50101, 50102 8199-05702 880011-880038 880074-880089 880106-880118 880240-880260 880248-880252 880251, 880314, 880400 880351-880355 880359 880428-880431 880444-880489 BEX-1500, 3000, 5000 DL1010U-DL1066U P101175, P10180 P10190 P12467 P13113, P13115 P13153, P13115 P13153, P13155 P19317, P19320, P19340 P19370, P19372, P19373	1115 1115 1115 1115 1115 1115 1115 111

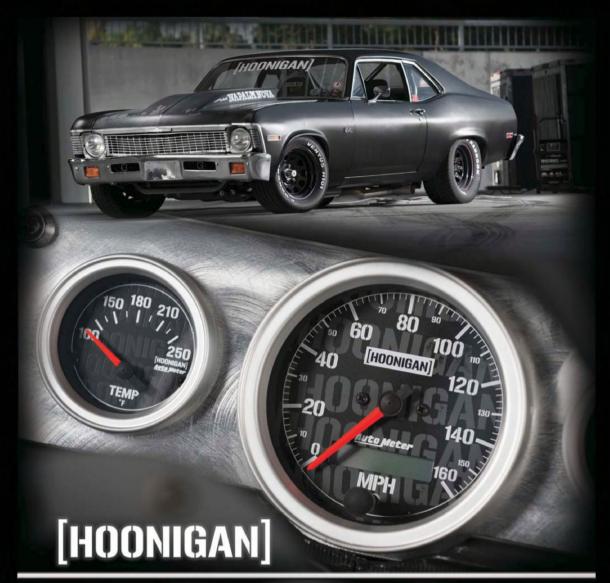



2-1/16" OIL PRESSURE, 100 PSI, ELECTRIC 4327-09000 2-1/16" VAC/BOOST, 30INHG-30PSI, MECHANICAL 4303-09000

2-1/16" OIL TEMP, 100-250 "F, ELECTRIC 4347-09000

2-1/16° VOLTMETER, 8-18V, ELECTRIC 4391-09000

# **BEX Series Battery Charger/Maintainer**



PEACE OF MIND DOESN'T HAVE TO COST A FORTUNE. WHEN YOU'RE READY TO GO FOR A CRUISE, THERE IS NOTHING MORE FRUSTRATING THAN HAVING A DEAD BATTERY OR A LOW TIRE. AUTOMETER HAS YOUR BACK WITH OUR ALL NEW BEX SERIES BATTERY EXTENDERS AND TIRE PRESSURE GAUGES, STARTING AT AROUND \$40, THE BEX-1500 AND BEX-3000 BATTERY EXTENDERS ARE FULLY AUTOMATED SMART CHARGERS WHICH KEEP YOUR ELECTRICAL SYSTEM IN PEAK CONDITION AND ARE COMPATIBLE WITH NEARLY ALL BATTERY TYPES (INCLUDING AGM).

- BATTERY EXTENDERS KEEP YOUR BATTERY AT FULL CHARGE ON A CONTINUOUS BASIS, GREATLY EXTENDING THEIR LIFESPAN.
- . COMPATIBLE WITH ALL LEAD ACID BATTERIES (STANDARD, AGM, GEL, ETC.).
- · PARASITIC DRAIN PROTECTION.
- FULLY AUTOMATIC "SMART" CHARGING WITH ADVANCED CIRCUITRY ENABLES ENERGY EFFICIENT AND SAFE CHARGING VIA AUTO METER'S ADVANCED SOFTWARE AND DIGITAL CIRCUITRY.
- AUTOMATED DESULFATION TO RECONDITION DISCHARGED BATTERIES.
- RUGGEDIZED AND WATER RESISTANT.
- SPARK FREE CONNECTION AND REVERSE POLARITY PROTECTION.
- CHARGE CURRENT: BEX 1500 1.5 A, BEX 3000 3.0 A, BEX 5000 5.0A.
- PERFECT FOR ANY MOTORCYCLE, BOAT, SNOWMOBILE, CAR, TRUCK, RV, AND LAWN MOWER.
- ULTRA LOW ENERGY USAGE, CEC AND UL1236 COMPLIANT
- . 3 YEAR WARRANTY











