

WirthCo Engineering, Inc.

"Understanding and fulfilling customer's needs... since 1980"



WELCOME TO WIRTHCO

WirthCo, a family based company, has entered our fourth decade as a prime manufacturer of practical products for making life easier and safer – at home, in the workplace, on the road, in the campground, and on the water. We are exceedingly grateful for valued employees, customers and suppliers. We are dedicated to continuing our growth based on integrity and service. We are also proud of our heritage of providing innovative, quality products.

Our innovative quality is reflected in over twenty patents and trademarks, a number that continues to grow. Our products have been proven in the laboratory and the marketplace. In addition to marketing our proprietary WirthCo brands, we proudly partner with of the world's largest and most successful distributors, retailers and OEM's which have selected WirthCo products for distribution under their own private brands. We invite you to review these pages, and to let us know how we can best serve you today...and during the decades to come.



LEGEND

| - | Items that help our planet, one product at a time! | -10 | Items with part numbers ending in -10 indicates 10 pieces . |
|-----|---|------|--|
| 0 | Product is made from recycled material. | CEC | California Energy Commission Promotes energy efficiency and conservation for electrical products by setting the state's appliance and building energy efficiency standards. |
| -7 | Items with part numbers ending in -7 indicates a bulk item (no retail package). | | RoHS Compliant WirthCo believes in the protection of planet Earth against |
| -50 | Items with part numbers ending in -50 indicates 50 pieces . | ROHS | known hazardous materials and continually strives to provide products that comply with the worldwide Restriction of Hazardous Substances Directive (RoHS). |



WirthCo products are warranted to be free from defects in material and workmanship for a period of twelve (12) months from the date of purchase. Defective products returned freight prepaid with proof of purchase will be repaired or replaced at the discretion of WirthCo. This warranty does not apply to products that have been altered, improperly installed, maintained or repaired, or damaged by accident, negligence or misuse. Further, all accessories must be returned for warranty credit.

TABLE OF CONTENTS

BATTERY DOCTOR

SMART CHARGERS

- 4 Introduction and Icon Key
- 5 Wall Mount Smart Battery Charger/Maintainers
- 6 Rainproof and Sport Smart Battery Chargers
- **7** Smart Charger and Engine Start/Bench Charger
- 8 Smart Battery Charger/Maintainers
- **9** On Board Charger/Smart Chargers
- **10** Battery Isolators/Tester

SOLAR SOLUTIONS

11 Solar Light, Mono-crystalline Solar Panels

- **12-13** Amorphous Solar Panels, Solar Kits
 - **14** Solar Controllers, Solar Adapter

DISCONNECTS & SWITCHES

- 15 Battery Life Preserver, Remote Disconnects
- 16-17 Knife-Blade Battery Switches
 - **18** Disconnects, Switches
 - **19** Compact Battery Switches
 - 20 Water Resistant Switches, Disconnect Caps
 - **21** Heavy Duty Switches
 - **22** Toggle Switches
 - **23** Rocker Switches
 - 24 Push-On Switches, Switch Panels, USB Chargers/Volt Meters
 - **25** Battery Bolts + Taps

CIRCUIT PROTECTION

- 26-27 Fuse Kits + Taps
- 27-28 MinBlade, MidBlade, MaxBlade, Low Profile, Glass Fuses29 LED Fuses, Fuse Holders
 - **30** Limiter Fuses + Holders
- **31-32** ATO/ATC Glass Fuse Holders
 - **33** ATM/MINI Fuse Holders
 - 34 Low Profile Micro² Fuse Holders, Wire Nuts
- 35-36 Fuse Blocks + Panels
 - **37** Circuit Breakers

TERMINALS

- 38 Crimp Caps, Bullet Connectors, Disconnects, Butt Connectors
- 39 Ring Terminals, Heat Shrink Butt Connectors, Spade Terminals, IDC Connectors

BATTERY ACCESSORIES

40-41 Cable Ties, Trailer Wire Accessories, Heat Shrink Tubing **42-43** Battery Filler Accessories, Cleaning Brushes, Wire Tools

PRIMARY WIRE

44-45 Primary Wire, Crosslink Wire

MARKETING

46-48 Split Loom Tubing, Retail Displays49 Retail Displays, Switch/Light Display Box, LED Writing Board

FUNNEL KING

DRUM FUNNELS

50-51 Drum Funnels, Drain Pans

FLUID CONTROL

- **52** Measuring Containers
- 53 Containers, Monster Funnel
- 54-55 Galvanized Funnels, Grease Guns
 - **56** Transfer Pumps, Drain Kits
 - **57** General Purpose Funnels
- **58-59** Heavy Duty Double Capped Funnels
 - 60 General Purpose Funnels

ACCESSORIES

- **61** Spouts and Adapters
- 62 Boot Trays, Third Hand Equipment
- 63 Bumpers, Tuffsack, Safety Shield, Shovel

Battery Doctor[®] Chargers Safely Charge Your Vehicle For 1 Day, 1 Week, 1 Month or Even a Year+!

Electronic Switching Technology – Battery Doctor[®] Chargers utilize electronic switching power technology as opposed to the linear technology (transformers) used with most other battery chargers.

Safer to Use – Electronic switching technology chargers do not get warm to the touch, unlike transformer chargers, making them friendlier to use! Battery Doctor[®] chargers are both short circuit protected and spark proof!

Compact, Portable, and Ultra Light - Our chargers are about half the size and half the weight of other chargers!

Reverse Polarity Protected – Battery Doctor[®] chargers are reverse polarity protected! Assures no damage to your battery or charger if the leads are connected incorrectly.

Simple and Easy to Use - Easy to follow instructions, clearly defined LED indicators and less complicated than others!

Battery Chargers Icon Key



6V/12V Compatibility Charges 6V and 12V Batteries



12V Compatibility Charges 12V Batteries



Multiple Battery Management Formulated to Safely Charge Wet-Cell, Gel-Cell, Lead-Acid, Calcium and AGM and Deep Cycle Batteries

Auto-Memory Returns to Last Selected Mode when Restarted



13.6V Equalization Mode Maximizes Battery Capacity, Reviving Low Voltage Batteries. Returns a Full Hydrometer Reading to Calcium Batteries by Removing Acid Stratification

Adjustable Amperage Multiple Manual Amperage Selection



ETL Approved



Plug-N-Play Connections EZ-Connects Included for Quick and Safe Connections Between Chargers and Accessories



Multiple Stage Charging Refresh, Soft Start, Bulk Charge, Absorption, Equalizing, Analysis and Float (Models May Vary)



Refresh Mode Uses Pulse Charging to Recover and Refresh Deeply Discharged and Sulfated Batteries

SAFE Reverse Polarity, Short Ci Overheat and Over-Curren



Reverse Polarity, Short Circuit, Spark Proof, Overheat and Over-Current and Overcharge



Electronic Switch Mode Technology Highly Efficient, Automatically Converts Electrical Power to Meet Your Battery's Charging Needs



UL and cUL Approved

BATTERY DOCTOR® 6/12 VOLT 900mA WALL MOUNT™ SMART BATTERY CHARGER/MAINTAINER

- 6/12 Volt 900mA
- Charges and Maintains Batteries from 5 to 100 Amp Hours
- Smart Battery Technology Prevents Overcharging
- Reverse Hook-Up Protection/Spark Resistant
- Automatic "Switching Technology" can be Safely Connected to the Stored Vehicle for Long Periods of Time
- Easy-to-Read Battery Charge Status LEDs
- Includes Ring Terminal and Alligator Clip Cable Attachments
- Direct Wall Plug-In Design Keeps the Work Area Clutter-Free
- Maintains Batteries up to 200 Amp Hours

900

mA

• CEC Certified







Accessories Included with #20026 & #20063 See Page 43 for these Replacement Part #'s



BATTERY DOCTOR[®] 12 VOLT 2 AMP WALL MOUNT[™] SMART BATTERY CHARGER/MAINTAINER

• 12 Volt - 2 Amp

#20026

- Charges and Maintains Batteries from 5 to 200 Amp Hours
- Smart Battery Technology Prevents Overcharging
- Reverse Hook-Up Protection/Spark Resistant
- Automatic "Switching Technology" can be Safely Connected to the Stored Vehicle for Long Periods of Time
- Easy-to-Read Battery Charge Status LEDs
- Includes Ring Terminal and Alligator Clip Cable Attachments
- Direct Wall Plug-In Design Keeps the Work Area Clutter-Free
- Maintains Batteries up to 400 Amp Hours
- CEC Certified









BATTERY DOCTOR® 6/12 VOLT 2 AMP SMART RAINPROOF® BATTERY CHARGER/MAINTAINER

- 6/12 Volt 2 Amp
- IP65 Water-Resistant Molded Case
- Smart Battery Technology Prevents Overcharging
- Reverse Hook-Up Protection/Spark Resistant
- Automatic "Switching Technology" can be Safely Connected to the Battery for Long Periods of Time
- Easy-to-Read Battery Charge Status LEDs
- Includes Ring Terminal and Alligator Clip Cable Attachments
- Charges and Maintains Batteries from 5 to 200 Amp Hours
- Maintains Batteries up to 400 Amp Hours
- CEC Certified





Accessories Included with #20067 & #20069 See Page 43 for these Replacement Part #'s





BATTERY DOCTOR® 12 VOLT 1.25 AMP SMART SPORT BATTERY CHARGER/MAINTAINER

- 12 Volt 1.25 Amp
- Smart Battery Technology Prevents Overcharging
- Reverse Hook-Up Protection/Spark Resistant
- Automatic "Switching Technology" can be Safely Connected to the Battery for Long Periods of Time
- Easy-to-Read Battery Charge Status LEDs
- Includes Ring Terminal and Alligator Clip Cable Attachments
- Charges and Maintains Batteries from 5 to 200 Amp Hours
- Maintains Batteries up to 400 Amp Hours
- CEC Certified

#20069









BATTERY DOCTOR® 12/24 VOLT SMART BATTERY CHARGER/MAINTAINER

- Smart Battery Technology Prevents Overcharging
- 12 Volt/8 Amp 24 Volt/4 Amp
- Digital Display Shows Voltage and Amperage
- Reverse Hook-Up Protection/Spark Resistant
- Includes Ring Terminals and Alligator Clip Cable Attachments
- LED Read-Out Display
- Wall Mount Hole in Back for Hanging Charger







#20068

BATTERY DOCTOR® 6/12 VOLT 2/10/55 AMP WITH ENGINE START

- For Use on Lead-Acid, Gel Cell and Deep Cycle Marine/RV Batteries
- Charging Modes: Automatic — 12V-10 Amp
 - Manual 12V-2/55 Amp, 6V-10 Amp
- 55 Amp Engine Start for Emergency Starting
- 6/12V 10 Amp, Fast Charge for Everyday Charging Needs
- 12V 2 Amp Trickle Charge for Keeping Stored Vehicles Charged
- Reverse Polarity Protection
- Industrial Grade Alligator Clamps
- Digital LED Meter Displays Both Voltage and Amperage of the Battery
- USB Port for Charging Personal Devices such as Cell Phones and Cameras
- Includes USB LED Flexible Work Light






LED Light



BATTERY DOCTOR® 12 VOLT/ 1 & 4 AMP SMART BATTERY CHARGER/MAINTAINER


- 12 Volt 1/4 Amp
- 7 Stage Smart Battery Technology Prevents Overcharging
- Reverse Hook-Up Protection/Spark Resistant
- Charges and Maintains Batteries from 5 to 400 Amp Hours
- Includes Ring Terminals and Alligator Clip Cable Attachments





BATTERY DOCTOR® 12 VOLT 500 mA SMART BATTERY CHARGER/MAINTAINER

- 3 Stage 12 Volt Smart Charger Technology Prevents Overcharging
- Smart "Automatic Switching Technology" can be Safely Connected to the Vehicle for Long Periods of Time
- Direct Wall Plug-In Design Keeps the Work Area Clutter Free
- Reverse Hook-Up Protection which is Spark Resistant
- Includes Alligator Clips
- CEC Certified








BATTERY DOCTOR® ON-BOARD 6/12 VOLT 1.5 AMP SMART CHARGER

- 6/12 Volt 1.5 Amp
- Four LEDs for Easy Charging Status Identification
- Reverse Polarity Protected/Spark Resistant
- Molded Plastic Weather Proof Case
- IP 52 Rated
- Includes Mounting Hardware for Automobiles, Boats, Tractors, Golf Carts, and Other Equipment
- Includes Ring Terminals
- CEC Certified

#20028



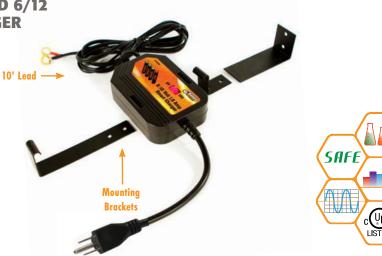

BATTERY DOCTOR® SMART CHARGER/MAINTAINERS

- 7-Stage Charging Program: Refresh, Soft Start, Bulk Charge, Absorption, Equalizing, Analysis and Float
- Refresh Technology: Breaks Down Internal Battery Resistance Resulting From Sulfation or a Heavily Discharged Battery
- Smart Battery Technology Prevents Overcharging
- Fully Automatic Smart Charging Technology with new Electronic Switching Control Technology
- Automatic "Switching Technology" can be Safely Connected to the Battery for Long Periods of Time
- Water Resistant Enclosure with Coating to Protect Circuit Board
- Automatically Detects Defective Batteries
- Thermal Resistor Automatically Senses the Internal Temperature of the Charger to Avoid Damages Due to Over-Heating or High Ambient Temperature





BATTERY DOCTOR[®] 2/4/8 AMP 12 VOLT SMART CHARGER

- LED Indicates the Selected Charging Rate (2, 4 or 8 Amps)
- Water Resistant Enclosure with Coating to Protect Circuit Board
- 6 Foot AC Cable and 8 Foot DC Cable Included
- Includes Alligator Clips and Ring Terminal Harness for Multiple Applications

#20085

BATTERY DOCTOR® 2/8/16 AMP 12 VOLT SMART CHARGER

- LED Indicates the Selected Charging Rate (2, 8 or 16 Amps)
- IP30 Rated Enclosure Designed with Louver for Ventilation
- 6 Foot AC Cable and 8 Foot DC Cable Included
- Includes Alligator Clips and Ring Terminal Harness for Multiple Applications

#20087

BATTERY DOCTOR® ISOLATOR SERIES

Our new state-of-the-art, fully automatic dual battery isolator is suitable for any vehicle with an auxiliary battery. Smaller and lighter than other standard battery isolators, the Battery Doctor[®] 100 and 150 Amp Battery Isolators employ electronic switching control technology. Our high-performance electronic isolator allows you to charge two batteries from a single alternator and keeps the starting battery isolated from the second battery. Also, with a single push of the override/reset button, you can change the batteries to parallel mode for jump starting.

• Water Resistant – Suitable for Marine Use, Rated IP62 Potted

RoHS


- Priority Charging for Starting Battery
- Includes Mounting Bracket
- Over Current and Surge Protected for Vehicles with Electronic Systems
- Manual Override for Starting Battery
- Automatically Charges Auxiliary Battery
- Charge Rate Depends on Alternator Amps
- Isolator Size: 4" x 4" x 2"

```
#20090 - 100 Amp
```

#20092 - 150 Amp

| Speci | fications |
|------------------|------------------------------------|
| Voltage | 12 Volt |
| Charging Current | 100 Amp or 150 Amp Peak |
| Charge Type | Parallel |
| Control | Electronic |
| Mounting | Surface / Fire Wall / Battery S |
| Current Draw | Charging 50mA (Standby 30mA) |
| Voltage Draw | None |
| Surge Protection | Built In |
| Approval | EMC |
| | |

ide



BATTERY DOCTOR® INSTANT "STATE OF CHARGE" TESTER

A push of a button tells you if your battery is weak or fully charged. Simply attach the ring terminals directly onto your battery. If your battery needs charging, simply attach the Battery Doctor[®] Charger directly to your Battery Doctor[®] Tester for a simple, tool-free connection.

- Reverse Polarity Protected
- 24" Lead
- 3 Amp Fuse Included





Ground

#20040

BATTERY DOCTOR® SURGE PROTECTOR & CHARGE MONITOR

Take the worry out of jumping and recharging your 12 volt battery. Our monitor protects your battery from damaging surges and also displays the battery's condition with indicator lights.

3-IN-1 MONITOR:

- Protects and Displays the Condition of your Battery and Charging System with the Push of a Button
- Protects Engine Computer and 12 Volt Accessories from Damaging Surges when Jump-Starting or Recharging
- Instant Installation
- Includes Two 20" Wire Leads with ⁵/₁₆ " Diameter Ring Terminals
- For All 12 Volt Batteries


| ROHS |
|----------|
| #20099 |
| #20099-7 |
| |



SOLAR CHARGED LED **INDUSTRIAL UTILITY LIGHT**

- 8 Ultra Bright LED Lights
- 3 AA 600 mAH Ni Mh Rechargeable Batteries
- 14' Charging Lead to Panel and 36" Toggle Switch Cord for On/Off Power
- Indoor and Outdoor Use
- Includes Mounting Hardware (Screws)
- Great for Industrial and Remote Locations where electricity Hook-Ups are Not Available

#23105

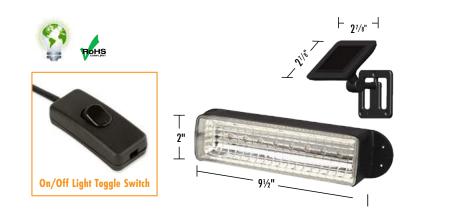

MONO-CRYSTALLINE SOLAR PANELS

Battery Doctor[®] Solar Solutions offer three 12 Volt choices in Mono-crystalline Solar Panels. Mono-crystalline panels are the most efficient solution, over all other models, at converting sunlight to electricity. Since these panels are more efficient you need fewer of them and if you have limited space, these may be a great option.

Kits Include:

- 9' Lead Wire Off Junction Box on back of Panel
- 3' Open Wire with E-Z Connect
- 3' Alligator Clips
- Mounting Brackets and Hardware Included
- Charger Controller Not Included

SOLAR CHARGER: 40 WATT PANEL

- Corrosion Resistant Anodized Frame
- Dimensions: 24" L x 20" W x 1.1" D
- Amp Rating: 3.3 Amps

#23130

SOLAR CHARGER: 90 WATT PANEL

- Corrosion Resistant Anodized Frame
- Dimensions: 33.5" L x 26.4" W x 1.4" D
- Amp Rating: 7.5 Amps

#23135



SOLAR CHARGER: 145 WATT PANEL

- Corrosion Resistant Anodized Frame
- Dimensions: 58.5" L x 26.4" W x 1.4" D
- Amp Rating: 12.1 Amps

#23137





MONO-CRYSTALLINE KITS See Page 14 for Controllers + 4-In-1 Adapter

80 WATT WITH 30 AMP CONTROLLER DELUXE KIT

- 40W Mono Panel x 2 (#23130)
- 4-in-1 Adapter (#23129)
- 30A 12V Controller (#23125)

#23164

90 WATT WITH 30 AMP CONTROLLER

- 90W Mono Panel (#23135)
- 30A 12V Controller (#23125)

#23165

145 WATT WITH 30 AMP CONTROLLER

- 145W Mono Panel (#23137)
- 30A 12V Controller (#23125)

#23169



AMORPHOUS SOLAR PANELS

Battery Doctor[®] Solar Solutions offer a variety of choices in Amorphous 12 Volt Solar Panels. Our Amorphous panels and kits work in all daylight conditions helping you to harness the Sun's Energy! Water resistant, shock and rust resistant. Battery Doctor[®] has your Go Green Technology covered!

- Converts Daylight into Electricity to Charge 12 Volt Batteries and Extend Battery Life
- Amorphous Solar Panels Charge even in Cloudy and Overcast Weather!
- Implements the Latest Resource with SiGe Technology Helping to Provide you the Most Efficient Panels on the Market!
- Plastic Corner Sleeves Prevent Scratching
- Includes E-Z Connect Adapter
- Built-in Blocking Diode Prevents Reverse Charging
- Includes Mounting Kits for Quick Installation
- Use with Deep Cycle, AGM, Lead-Acid and Gel-Cell 12 Volt Batteries
- Includes Bright LED Current Indicator Attachment



SOLAR PANEL MAINTAINER 1.8 WATT KIT

- Anodized Aluminum Frame
- Dimensions: 12 1/2" L x 4" W x 1" D
- Amp Rating: Up to 150 mA
- No Controller Needed for Single 12 Volt Battery Application
- **Accessories Included:**
- Male Output 12V Adapter (Cigarette Lighter Adapter)
- LED Voltage Indicator
- Alligator Clips
- Included Hardware: Tilt Rods (2)
- Plug and Play Bullet Connection System



Accessories Included with

SOLAR PANEL TRICKLE CHARGER/ MAINTAINER 5 WATT KIT

- Anodized Aluminum Frame
- Dimensions: 12 1/2" L x 12 1/2" W x 1" D
- Amp Rating: Up to 420 mA
- **Accessories included:**
- Male Output 12V Adapter (Cigarette Lighter Adapter)
- Alligator Clips
- LED Voltage Indicator
- Included Hardware: Tabs and Screws
- Plug and Play Bullet Connection System





24.4" -

SOLAR PANEL CHARGER/ MAINTAINER 9 WATT KIT

- Anodized Aluminum Frame
- Dimensions: 24.4" L x 8.3" W x 1" D
- Amp Rating: Up to 750 mA
- Controller Needed for 12 Volt Battery

Accessories included:

- Male Output Adapter (Cigarette Lighter Adapter)
- Alligator Clips
- LED Voltage Indicator
- Hardware Included: Tabs and Screws
- Plug and Play Bullet Connection System



Voltage Indicator
Accessories Included with #23144

Alligator Clips

12V Adapter

8.3

SOLAR PANEL CHARGER/MAINTAINER 20 WATT KIT


- Aluminum Frame with Plastic Edging
- Dimensions: 46" L x 15" W x 2" D
- Amp Rating: Up to 1.7 Amps
- Controller Needed for 12 Volt Battery

Additional Accessories included:

- 12 Volt Socket Cable
- Battery Cable
- 18" Male 12V Socket Adapter
- 18" Female 12V Socket Adapter
- 21" Solar Controller Connecting Wire
- 36" Alligator Clips

#23145

- 4 Screw Holes in Each Corner
- Plug and Play Bullet Connection System

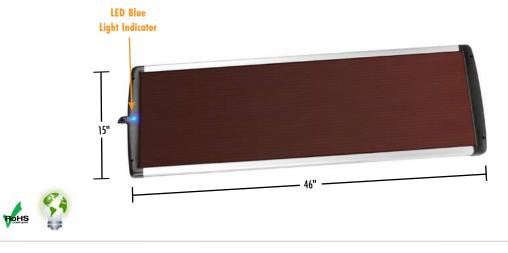

AMORPHOUS SOLAR PANEL KITS AVAILABLE FOR INCREASED SOLAR POWER



| | BAT | TERY | | | | | DNS FOR 12 VOLT BATTERIES |
|---------------------------|-----------------------|---------|----------|-------------------|--------|---------------------|--|
| | Part # | Wattage | Maintain | Trickle Charge | Charge | Solar Controller | Applications |
| Amorphous | 23140 23143 | | x x | x | | | Cars, RVs, ATVs, Motorcycles, PWC, Electric Bicycles, Motorscooters and Small Boats |
| Panels | 23144 | 9 | x | x | x | Recommended | Riding Lawn Mowers, Med Sized Boats, Trucks, Motorcycles, ATV's and Autos, Fence Chargers, Deer Feeders, Sump Pumps, Electronic Gates and Small Portable Electronics |
| | 23145 | 20 | х | х | х | Required | Boats, RVs, Tractors, Combines, Trucks and Smaller 12 Volt Back Up Generator Power Systems |
| | 23130 40 x x Required | | | | | | |
| Monocrystalline Panels | 23135 | 90 | х | х | х | Required | Will help charge and maintain: RV's, Combines, Boats, Larger 12 Volt Back Up Power Systems, and Off Grid Applications |
| Fallets | 23137 | 145 | х | х | х | Required | fore back op i over bystellis, and off offer Appreciations |

SOLAR CONTROLLERS

12 VOLT 30 AMP DIGITAL SOLAR CONTROLLER

- Charges, Maintains and Regulates 12 Volt Batteries from Overcharging and Discharging
- LED Indicators Show Four Levels of Charging Status
- Easily Mounted in Weather Protected Area
- Handles Up to 30 Amps of Array Current and Up to 500 Watts of Solar Power
- Continuously Displays the Charging Current or Battery Voltage on the LCD Digital Meter
- Automatically Indicates the Charged Condition of the Battery on the LED Bar Graph
- For Use with Gel-Cell, AGM, Deep Cycle and All Lead-Acid 12 Volt Batteries
- Hardwire Hook-Up

12 VOLT 10 AMP SOLAR CONTROLLER

- Maintains and Regulates 12 Volt Batteries From Overcharging and Discharging
- Handles Up to 10 Amps (120 Watts) of Array Current
- Maintenance-Free Protection of Your Solar Panel and Batteries
- Maintains 12 Volt Batteries in a Fully Charged State
- Small, Compact and Easy to Mount
- For Use with Gel-Cell, AGM, Deep Cycle and All Lead-Acid 12 Volt Batteries
- Easily Mounted in Weather Protected Area
- Plug and Play Bullet Connections

Rons

#23122








4-IN-1 SOLAR PANEL ADAPTER

Maximize Your Solar Panels' Output!

- Safely Connects Up to 4 Like Solar Panels in Parallel
- 11' 6" Long
- Includes 4 Bullet E-Z Connectors
- Quick and Easy to Use: No Cutting or Splicing!
- Max Wattage: 80 Watts



14



BATTERY LIFE PRESERVER™ AUTOMATIC BATTERY DISCONNECT SWITCH

This state-of-the-art electronic device automatically monitors your battery capacity. It prevents your battery from going dead by automatically disconnecting the battery at 12.0 volts, therefore reserving enough power to start the vehicle.

- Automatically Disconnects the Vehicle's Battery at 12.0 Volts
- Connect and Disconnect the Battery with the Touch of a Button on the Wireless Remote
- Helps Prevent the Following: Being Stranded, Dead Battery, Jumper Cables, Towing, Emergency Calls
- Anti-Theft Device when Activated
- Easy Bolt-On Installation: Does Not Require Any
- Cables to Be Cut
- Included 2 Key Fobs and Mounting Hardware
- Side Post Battery Needs #30300 Bolt (Not Included - See Page 25)
- 200 Amps Continuous
- 1100 Amps Peak
- #20395

REMOTE ELECTRIC DISCONNECT SWITCH

- Switch Manually from Remote Location via Rocker/Toggle Switch
- LED Status Identification for Remote Control Switch
- 9.5VDC 32VDC
- 275 Amps Continuous
- 455 Amps Intermittent
- 1,250 Amps Cranking
- Power Draw: Switch Off 12mA; Switch On 15mA

#20370-7

BATTERY DOCTOR® MINI MASTER BATTERY DISCONNECT SWITCHES

- For Application Up to 48 Volts
- ISO 8846 Approved
- Continuous Rating: 300 Amps
- Intermittent Rating: 1000 Amps/5 Seconds
- Crank Rating: 700 Amps/10 Seconds
- Can Be Used with 1 or 2 Batteries
- Dimensions: 2 ³/₄" L x 2 ³/₄" W x 3" H
- Recess, Flush Top Mount
- Label Glows in the Dark
- Removable Backplate
- Cable Knockout Plate on All Sides



#20387



#20393




#20387 - Single Battery Disconnect Switch - 2 Position
#20387-7
#20393 - Dual Battery Disconnect Switch - 4 Position
#20393-7

Our patented Battery Doctor[®] switches are easy to install and simple to use.

All of Our Knife-Blade Switches:

- Mount on Negative Battery Post Only
- Disconnect Batteries Quickly and Easily
- Stop Unwanted Battery Drain
- Help Prevent Theft, Tampering and Unauthorized Use
- Improve Safety and Security of Stored Vehicles, RVs and Seasonal Equipment
- Are Rated 250 Amps Continuous and 750 Amps Surge at 12 Volts



FOR TOP POST BATTERIES, LOW PROFILE HORIZONTAL OPERATION

Opens and Closes Horizontally Where Clearance Above the Battery is Limited - Install on Negative Post Only



FOR TOP POST BATTERIES, LOW VERTICAL OPERATION

Switches recommended to mount on negative battery post to disconnect ground and battery. Easy to reach and operate.



12/24-VOLT HEAVY AG EQUIPMENT SWITCH

Double-pole, double-throw switch connects two 12 volt batteries either in parallel for maximum current and charging, or in series for 24 volt starting power. Instructions included.

- Great for Bench Testing Rebuilt Starters and Alternators, Plus Other 12 or 24 Volt Applications
- Open Switch Disconnects Both Batteries for Storage or Electrical Work
- Surface Mounted
- 4 ¾" W x 6 ¾" L x 2" H

#20238-7



SURFACE MOUNTED "IN-LINE"/REMOTE MOUNT SWITCHES

For concealed installations, or where battery box space is limited. Connects to the negative battery cable; other side connects to the vehicle cable.

- Both Terminals are 5/16" Bolts for Receiving Eyelet **Cable Connectors**
- 3" W X 4" L X 2" H



- One Terminal is 5/8" Post for Receiving Standard Battery Cable Clamp, the Other Terminal is 5/16" Bolt for Receiving Eyelet **Cable Connector**
- 3" W x 4" L x 2" H

#20198

#20198-7



#20188 #20188-7

DUAL BATTERY SWITCHES

Allows use of one battery for accessories while reserving second battery for starting. Selected battery is connected to provide power and receive charging from vehicle; non-selected battery remains idle. Surface mounted.



FOR SIDE TERMINAL BATTERIES

- Mounts on Negative Side Battery Terminal
- Provides ³/₈-18 Bolt for Receiving Standard Eyelet Cable Connector
- 3 ¹/₄" W x 3 ³/₄" L x 1 ¹/₂" H




DOUBLE POST ACCESSORY SWITCH

Allows uninterrupted power to vehicle while switch controls power to accessory equipment. Ideal for use with winches, snow plows, generators and to power pick-up camper accessories.

- Mounts on Negative Top Post of Battery. Provides One Un-switched %" Post, Plus One Switched %" Post
- 3 1/4" W x 4" L x 2" H

#20208 #20208-7



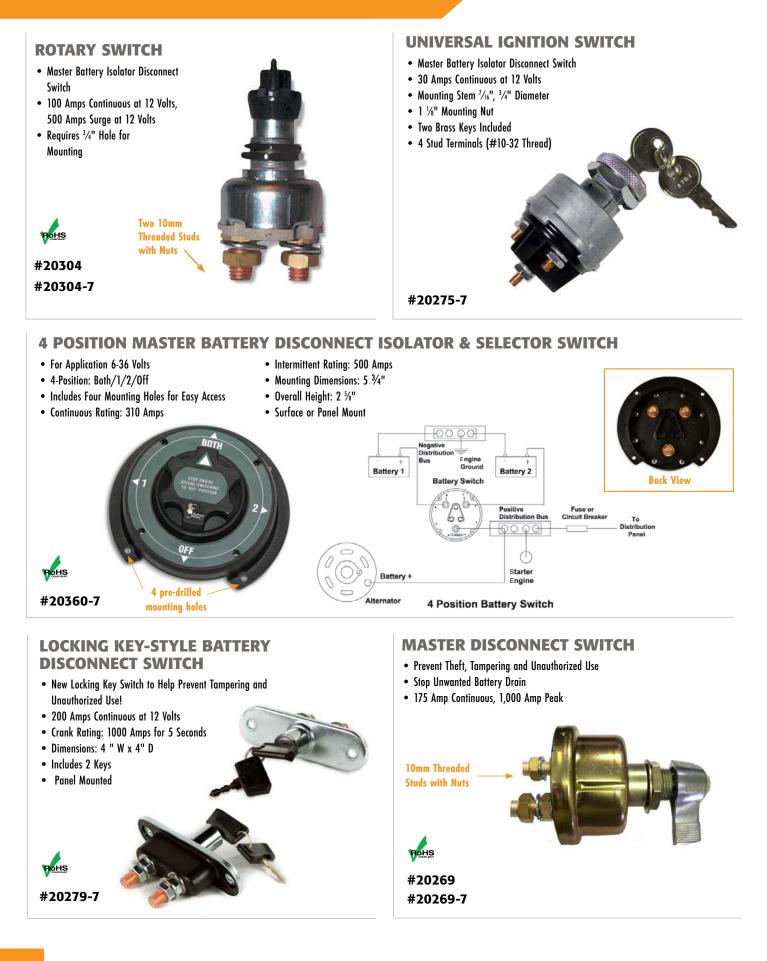

All of Our Compact Battery Switches Feature:

- Easy to Install on Negative Battery Post
- Battery is Disconnected by Unscrewing the Knob a Few Turns, and Reconnected by Tightening the Knob
- Knob Can be Removed Completely to Deter Theft
- Compact Size Fits Most Battery Compartments
- Rated 500 Amps Surge and 125 Amps Continuous at 12 Volts

TOP MOUNT WITHOUT FUSED BYPASS



TOP MOUNT WITH FUSED BYPASS



• (For more information on In-Line Fuse Holder #20311, please see page 33)




The secret...

is the cam action!

QUICK RELEASE BATTERY BOLTS

- Anti-Corrosive Steel Bolts
- Replaces Standard 5/16" Battery Terminal Bolt
- Color-Coded Polypropylene Levers
- No Tools Required
- Cam Action Tightens and Loosens Bolts
- Heat Treated Steel
- Sold in Pairs



- #20309 and #20310 Include a 15 Amp Fused Bypass that Maintains Computer Settings, Radio, Clock, Etc., while Battery is Disconnected
- Retail Package Includes Battery Terminal Markers #20250, as Shown on Page 43



SIDE MOUNT WITHOUT FUSED BYPASS





#20307-7

SIDE MOUNT WITH FUSED BYPASS



• (For more information on In-Line Fuse . Holder #20311, please see page 33)



QUICK DISCONNECT BRASS BATTERY TERMINAL

- Designed for Both Round and Square Battery Lugs
- Quickly Isolates the Vehicle's Battery, Allowing Clock, Radio, etc. to Remain Functional When Used with a Fused Bypass
- To Isolate the Starter Circuit Only, Unscrew the Knob (It is Not Necessary to Remove the Knob)



#20350-7

WATER-RESISTANT MASTER SWITCH

- Excellent for Marine or Automotive Use
- Rated 100 Amps Continuous, 500 Amps Surge at 12 Volts
- Rated 50 Amps Continuous, 250 Amps Surge at 24 Volts
- 2 1/4" Diameter X 2 1/2" Deep 1 1/4" Deep Behind Panel
- Two 3/16" Diameter Mounting Holes

#20314 - Retail Kit Includes: 1 Switch,


#20314-7 - Bulk with All Items Above

#20312-7 - Water-Resistant Cover Only

#20315-7 — Switch With 1 Key, Unpackaged (Cover Not Included)







Measurements are in inches

BATTERY AND ALTERNATOR WATER-RESISTANT MASTER SWITCH

1 Water-Resistant Cover, and 2 Keys

 Reduces Risk of Alternator Circuit Damage Due to Heavy Voltage Surge 100 Amps Continuous at 12 Volts 500 Amp Surge

Includes:

• Water-Resistant Cover

#20316-7 - Key Only

• 1 Key

RoHS


#20319-7


RoHS

• 3 Ohm 11 Watt Resistor and Wiring Diagram



3 OHM Resistor





EMERGENCY PUSH BUTTON BATTERY DISCONNECT SWITCH

"Twist to connect...push to disconnect!"

- Allows Electrical Circuit of Vehicle to Be Killed With Push of Button
- To Operate, Twist the Red Button Until it Clicks into "On" Position to Make Contact; to Turn Switch Off, Just Press the Button!
- Heavy Duty Weighs 11b 5oz
- Rated 250 Amps Continuous, 2500 Amps Surge at 12 Volts for 5 seconds
- Ideal for Emergency Vehicles, Industrial, Agricultural, Marine, Automotive and All Heavy Duty Industrial Use

#20256-7 HOHS



BATTERY QUICK DISCONNECT CAPS

- Fits Top Post Batteries
- Manufactured of Copper-Zinc Plated Steel
- Fits Side Post Batteries (with Stardard Post Adapters)
- Attach to Batteyr Terminal by Clamping Down on Cap
- Lift Cap to Remove from Battery Terminal
- Rated 500 Amps Continuous, 800 Amps Surge at 12 Volts
- Color-Coded Caps: Red and Black
- Sold as a Pair
- Accepts 4-6 Gauge Wire







with Nuts

HEAVY DUTY DUAL BATTERY SWITCH

"Key turns 90° to instantly connect or disconnect dual batteries"

- Engages or Disconnects Two Batteries Simultaneously
- Rated 250 Amps Continuous, 2500 Amps Surge at 12 Volts for 5 seconds
- Two ½" Diameter Mounting Holes on 4" Centers
- Key is Captive in "On" Position and Removable in "Off" Position
- Weather-Resistant Cover and 1 Key Included
- 5 1/2" L x 4 1/8" W x 5" D (3" Deep Behind Panel)



#20258-7



Incorporates Flange for **Panel Mounting** from Front or Rear For Discreet Appearance. Panel Mounting from Rear Requires Only a Single Center Hole Plus Two Mounting Holes

HEAVY DUTY SINGLE BATTERY SWITCH

"Key turns 90° to instantly connect or disconnect the battery"

- Rated 250 Amps Continuous, 2500 Amps Surge at 12 Volts for 5 Seconds
- Two 1/2" Diameter Mounting Holes on 4" Centers
- Key is Captive in "On" Position and Removable in "Off" Position
- Weather-Resistant Cover and One Key Included
- 5" L x 21/2" W x 4%" D (3" Deep Behind Mount Panel)

#20259-7 10Hs

Two 10mm Threaded Studs with Nuts



FIXED HANDLE BATTERY DISCONNECT SWITCH

"Turn to connect...turn back to disconnect!"

- Heavy Duty Removable Handle/Key
- Allows Electrical Circuit to Be Switched On and Off With a Turn of the Handle/Key
- Rated 500 Amps Continuous, 5000 Amps Surge at 12 Volts for 5 Seconds
- Water Resistant



#20257-7 - Fixed Handle Without Lockout Plate
#20247-7 - Fixed Handle With Lockout Plate
#20243-7 - Keyed Switch
#20245-7 - Key Only
#20246-7 - Lockout Plate Only



#20247-7



PULL ON/PUSH OFF SWITCH

- Screw Terminal Wire Connection
- Long Neck for Thicker Panels
- Requires 5/16" Hole for Mounting
- Rated 16
 Amps at 12 Volts



#20300 #20300-7

MICRO TOGGLE SWITCH

- Two-Position On/Off
- Requires ³/16" Hole for Mounting



#20512

#20512-7

METAL TOGGLE SWITCH

- Two-Position On/Off
- Screw Terminals
- Requires 1/2" Hole for Mounting

 Rated 20 Amps at 12 Volts

#20511 #20511-7



SHORT CHROME TOGGLE SWITCH

- Two-Position On/Off
- Space-Saving Duckbill Toggle
- Requires $\ensuremath{\ensuremath{\mathcal{V}}}\xspace^{-1}$ Hole for Mounting
- Rated 20 Amps at 12 Volts

#20506 #20506-7

22

ILLUMINATED TOGGLE SWITCH

- Two-Position On/Off
- Illuminates in "On" Position
- Requires 1/2" Hole for Mounting
- Includes Nut and Back-Up Collar for Mounting
- Rated 20 Amps at 12 Volts

| Part # | Bulk | Color |
|--------|---------|-------------------|
| 20500 | 20500-7 | Illuminated Red |
| 20501 | 20501-7 | Illuminated Green |
| 20502 | 20502-7 | Illuminated Amber |
| 20503 | 20503-7 | Illuminated Blue |



PLASTIC TOGGLE SWITCHES - 2 OR 3 POSITIONS

- Requires ½" Hole for Mounting
- Includes Nut and Back-Up Collar for Mounting
- Rated 20 Amps at 12 Volts



| Part # | Bulk | Position |
|--------|---------|---------------------|
| 20505 | 20505-7 | 2-Position "On/Off" |

20507 20507-7 3-Position "On/Off/On"

HEAVY DUTY METAL TOGGLE SWITCH

- High Current Switch
- Requires ½" Hole for Mounting
 Rated 25 Amps at 12 Volts



| Part # | Bulk | Position |
|--------|---------|------------------------|
| 20508 | 20508-7 | 3-Position "On/Off/On" |
| 20509 | 20509-7 | Momentary On/Off |
| 20514 | 20514-7 | 2-Position "On/Off" |
| 20514 | 20514-7 | 2-Position "On/Off" |

HEAVY DUTY LED ILLUMINATED TOGGLE SWITCH

- Two-Position On/Off
- Super Bright LED on Toggle
- Requires ½" Hole for Mounting
- Rated 25 Amps at 12 Volts

| Part # | Bulk | LED Color |
|--------|---------|-----------|
| 20520 | 20520-7 | Amber |
| 20521 | 20521-7 | Blue |
| 20522 | 20522-7 | Green |
| 20523 | 20523-7 | Red |
| | | |





- Super Bright LED Illuminates Amber in the On Position
- Requires 1/2" Hole for Mounting
- Rated 16 Amps at 12 Volts

#20554 #20554-7

SWITCH PANELS

- Precut Making Installation Easy
- Durable ABS Plastic
- Paintable



| 20590 20590-7 13/16" x 1/2" Slot Panel 20591 20591-7 1/2" Round Hole Panel | Part # | Bulk | Size/Shape |
|--|--------|---------|------------|
| 20501 7 | 20590 | 20590-7 | |
| | 20591 | 20591-7 | |

PROTECTIVE TOGGLE COVERS

- Aircraft Style Toggle Covers
- Prevents Accidental Switching





| Part # | Bulk | Amp at 12V | Color |
|--------|---------|---------------|----------------------|
| 20531 | 20531-7 | 20A | Illuminated Amber |
| 20532 | 20532-7 | 20A | Illuminated Red |

ILLUMINATED PUSH ON/OFF SWITCH WITH SPLASH PROOF SEAL

- Push On / Push Off
- Super Bright Red LED
- Requires 3/4" Hold for
- Mounting
- Volts

#20533

#20533-7

#20595

#20595-7

ROCKER SWITCH PANEL

- Two-Position On/Off Rocker Switch
- Rocker Illuminates Red
- Rated 20 Amps at 12 Volts



| Part # | Bulk | Cover Color |
|--------|---------|-------------|
| 20560 | 20560-7 | Blue |
| 20561 | 20561-7 | Carbon |
| 20562 | 20562-7 | Camouflage |
| 20563 | 20563-7 | Chrome |
| 20564 | 20564-7 | Green |
| 20565 | 20565-7 | Red |
| 20566 | 20566-7 | Yellow |
| | | |

12 VOLT INDICATOR LIGHT

- Super Bright 12V Light Captures Attention
- Chrome Bezel
- Requires 1/2" Hole for Mounting
- Rated 12 Volts

| Bulk | Color |
|---------|-------------------------------|
| 20540-7 | Amber |
| 20541-7 | Blue |
| 20542-7 | Green |
| 20543-7 | Red |
| | 20540-7 20541-7 20542-7 |



RED ILLUMINATED ON/OFF ROCKER SWITCH

- Two-Position On/Off
- Super Bright Red LED
- Requires 1" Hole for Mounting
- Rated 20 Amps at 12 Volts



#20550-7

TOGGLE SWITCH LIGHT ASSEMBLY KIT

- Two-Position On/Off Toggle
- Illuminates in "On" Position
- Super Bright Red Indicator Light
- Includes Modular Mounting Bracket
- Rated 20 Amps at 12 Volts

#20510

#20510-7




MOMENTARY PUSH-ON BUTTON SWITCH

For controlling apparatus that requires temporary power and manned operation.

- Heavy Duty Momentary Push-On Switch
- Water-Resistant Cover
- 30 Amps at 12 Volts





START/IGNITION PANELS - 2 OR 3 SWITCH

2 "

- 2 or 3 Switches, Plus 1 LED
- Polished Aluminum Panel
- Toggle Switch with Cover
- 25 Amps at 12 Volts
- Red Indicator Light
- Starter Button 16 Amps at 12V





#20280 - 2 Switch/1 LED #20280-7 #20283-7 - 3 Switch/2 LED

DC DIGITAL VOLT METER

- Range 6V-30V DC
- Illuminated Red Read-out
- Includes Faceplate and Hardware



#20600

START

- DUAL USB CHARGER
- Dual USB with Weatherproof Cover
- Total: 3.1A (1A + 2.1A)
- Indicator Light
- Includes Faceplate and Hardware



#20601

DIE-CAST PUSH-ON STARTER SWITCH WITH COVER

- Heavy Duty Die Cast Push-On Starter Switch, Momentary On
- Water-Resistant Cover
- 16 Amps at 12 Volts
- ¾" Diameter Mounting Hole Required for Panel Mount



#20302-7

EMERGENCY CUT-OFF SWITCH

- Emergency Cut-off Switch
- 12A 15A
- Lanyard Length: 17"
- Four Prong Connectors for



DUAL USB WITH VOLTAGE METER

- Dual USB with Weatherproof Cover
- Total: 4.2A (2.1A + 2.1A)
- Range: 5V-30V DC
- Includes Faceplate and Hardware



#20602

DUAL USB CHARGER

Tether Cord

- Dual USB with Weatherproof Cover
- Total: 3.1A (1A + 2.1A)



#20603

Our Battery Bolts Feature:

- Easy and Reliable Direct Connections to the Battery
- Studs Accommodate One or Several 3/8" Ring Terminals
- Excellent for Trailer Brake Controls and Other Accessories Requiring Direct Power

Don't see your dimension here? Let us design and build for you!

| | Battery Bolt Dimensions | | | | | |
|--------|-------------------------|---------------------|-----------------------|-------------------|----------------|----------------|
| Part # | Overall Length | Nominal Diameter | Coupler Thread | Battery Insert | Stud Thread | Stud Length |
| 30300 | 1.590" | 5/8" hex | 3/8-16 | .400" | 3/8-16 | .400" |
| 30400 | 1.750" | 5/8" hex | 3/8-16 | .400" | 3/8-24 | .680" |
| 30500 | 1.832" | 5/8" hex | 3/8-16 | .250" | 3/8-16 | .960" |
| 30600 | 1.440" | 1/2" hex | 5/16-18F .70" deep | N/A | 5/16-18 | .400" |

TOP POST BATTERIES:

Replaces nut on cable connector bolt. Keeps ring terminals away from corrosion at battery terminal.

TOP MOUNT BOLT AND NUT, STANDARD



#30600-7

PATENTED FRAME GROUND TAP/SIDE MOUNT TERMINAL TAP

- Special Shape Allows Optional Attachment Directly to Batterv **Side Terminals** • Simple and **Reliable Connection** of Accessory
- Ground Leads • Up to 3 Slip-On Terminals Can be Connected to Each Triple Tap
- Can be Stacked to Provide Multiple Taps at One Location

RoHS

#30700 Kit - 2 Taps, 6 Slip-On Terminals

#30700-7 - Tap Only

- Direct-to-Battery Power Circuits Help Reduce Noise in Stereo, **Communication and Other Electronic Equipment**
- All Models are Solid Brass

SIDE TERMINAL BATTERIES:

Replaces the standard bolt in the battery terminal with a threaded stud. SIDE TERMINAL BOLT AND NUT, STANDARD

#30300 #30300-7



SIDE TERMINAL BOLT AND NUT, LONG





#30400-7









PATENTED TAP TERMINAL/GROUND TAP

- Attaches to Top Post Cable Bolt without Removing Bolt
- Incorporates One #8 Hole for Optional Use as Frame Ground



#30703 Kit - 2 Taps, 6 Slip-On Terminals








FUSE TAPS FOR OCCUPIED SLOTS IN FUSE BLOCK

- Taps Clip onto Existing Fuses to Provide an Additional Connection Point for Slip-On Terminals
- A Tap Installed at "Cold" End of Fuse Slot is Protected by Existing Fuse
- A Tap Installed at "Hot" End of Fuse Slot Requires Installation of Additional In-Line Fuse for New Circuit

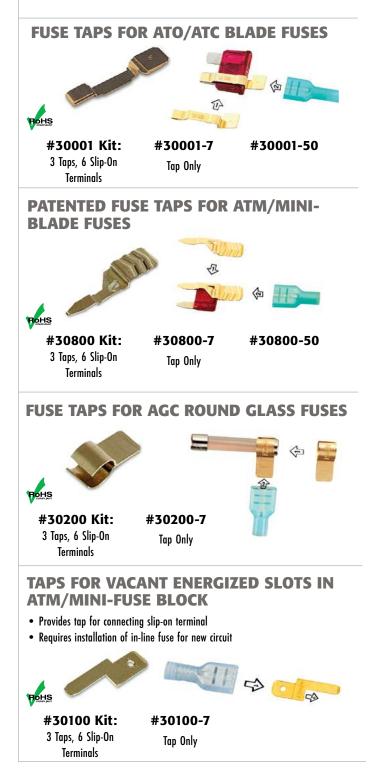

42 PIECE FUSE KITS

Includes 7 pieces of each: 5, 10, 15, 20, 25, 30 Amp fuses. Also includes fuse puller/tester.

42 PC FUSE KIT WITH PULLER/TESTER



| #30914 | — MidBlade™ |
|--------|---------------|
| | (ATO/ATC Kit) |

| #30916 | – Low Profile Mini |
|--------|--------------------|
| | (APS Kit) |

#30915 — MinBlade™ (ATM/Mini Kit) **#30917** − MinBlade^{2™} (ATR/MICRO2[™])

80 PIECE FUSE KIT

 Includes 10 Pieces Each:
 3, 5, 7.5, 10, 15, 20, 25 and 30 Amp Fuses

RoHS

#30990 - MidBlade™

#30993 - MinBlade™

(ATO/ATC Kit)

(ATM/Mini Kit)



6 PIECE FUSE KIT

• Includes 1 Piece Each: 5, 7.5, 10, 20, 25 and 30 Amp Fuses



YELLOW TOOL BOX FOR CUSTOM KITS

DON'T SEE A KIT THAT FITS YOUR NEEDS?

#30903 – MidBlade™

#30913 - MinBlade™

(ATO/ATC Kit)

(ATM/Mini Kit)

Rons



LET US CREATE ONE FOR YOU!

24 PIECE FUSE TAP KIT

• 12 Volt Power Connector Kit



#30995

| Part # | Description | Qty |
|--------------|---|-----|
| 30001-7 | Fuse Tap Kits for ATO/ATC Fuses | 2 |
| 30200-7 | Fuse Tap Kits for AGC and SFE Fuses | 2 |
| 30300-7 | Battery Bolt for Side Mount Terminal Batteries | 2 |
| 30600-7 | Battery Bolt for Top Post Batteries | 2 |
| 30700-7 | Frame Ground Tap, Also Used as a Side Terminal "Triple Tap" | 2 |
| 30703-7 | Top Post "Triple Tap", Also Used as a Frame Ground | 2 |
| 30800-7 | Fuse Tap Kits for ATM/Mini Fuses | 2 |
| 30870-7 | Blue Terminals for 16-14 Gauge Wires | 4 |
| 30873-7 | Red Terminals for 22-18 Gauge Wire | 4 |
| 30876-7 | Yellow Terminals for 12-10 Gauge Wires | 2 |
| Total Pieces | | 24 |

MIDBLADE™ FUSES

- Replaces ATO/ATC Fuses
- Complies with SAE J1284 and UL 275A Standards

| 5 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | Color |
|-------------------------|--------------------|---------|-----|---------|
| 24353 | 24353-50 | 24353-7 | 3 | Violet |
| 24355 | 24355-50 | 24355-7 | 5 | Tan |
| 24357 | 24357-50 | 24357-7 | 7.5 | Brown |
| 24360 | 24360-50 | 24360-7 | 10 | Red |
| 24365 | 24365-50 | 24365-7 | 15 | Blue |
| 24370 | 24370-50 | 24370-7 | 20 | Yellow |
| 24375 | 24375-50 | 24375-7 | 25 | Natural |
| 24380 | 24380-50 | 24380-7 | 30 | Green |
| 24390 | 24390-50 | 24390-7 | 40 | Orange |
| | | | | |





HOHS SAE

MINBLADE™ FUSES

- Replaces ATM/Mini Fuses
- Complies with SAE J2077 and UL 275A Standards

| 5 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | Color |
|-------------------------|--------------------|---------|-----|---------|
| 24101 | 24103-50 | 24103-7 | 3 | Violet |
| 24105 | 24105-50 | 24105-7 | 5 | Tan |
| 24107 | 24107-50 | 24107-7 | 7.5 | Brown |
| 24110 | 24110-50 | 24110-7 | 10 | Red |
| 24115 | 24115-50 | 24115-7 | 15 | Blue |
| 24120 | 24120-50 | 24120-7 | 20 | Yellow |
| 24125 | 24125-50 | 24125-7 | 25 | Natural |
| 24130 | 24130-50 | 24130-7 | 30 | Green |





POLIS SAE.

MINBLADE^{2TM} FUSES

• Replaces ATR/Micro2™ Fuses

| 5 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | Color |
|-------------------------|--------------------|---------|-----|---------|
| 24805 | 24805-50 | 24805-7 | 5 | Tan |
| 24807 | 24807-50 | 24807-7 | 7.5 | Brown |
| 24810 | 24810-50 | 24810-7 | 10 | Red |
| 24815 | 24815-50 | 24815-7 | 15 | Blue |
| 24820 | 24820-50 | 24820-7 | 20 | Yellow |
| 24825 | 24825-50 | 24825-7 | 25 | Natural |
| 24830 | 24830-50 | 24830-7 | 30 | Green |
| | | | | |







LOW PROFILE FUSES

These new smaller, lower profile APS/Mini Fuses are used in newer vehicles and any place where space is limited (Toyota Aygo, Toyota Prius, Honda Civic, Vauxhall Corsa, Citroen or Peugeot and many others and new Ford ROHS vehicles!).

- Replaces APS/Low Profile Mini Fuses
- Complies with JASO Standards

| 5 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | Color |
|-------------------------|--------------------|---------|-----|---------|
| 24155 | 24155-50 | 24155-7 | 5 | Tan |
| 24157 | 24157-50 | 24157-7 | 7.5 | Brown |
| 24160 | 24160-50 | 24160-7 | 10 | Red |
| 24165 | 24165-50 | 24165-7 | 15 | Blue |
| 24170 | 24170-50 | 24170-7 | 20 | Yellow |
| 24175 | 24175-50 | 24175-7 | 25 | Natural |
| 24180 | 24180-50 | 24180-7 | 30 | Green |



MAXBLADE™ FUSES



AUTOMOTIVE BLADE FUSE STYLES

 MidBladeTM Fuse (ATO/ATC)

• Low Profile Fuse

(APS)



(ATM/Mini)

MinBladeTM Fuse



 MaxBladeTM Fuse (Maxi)









• MinBlade^{2TM} Fuse

(ATR/Micro^{2TM})

GLASS FUSES

• Replaces AGC Fuses

| | AGC Style Fuses | | | | |
|-------------------------|--------------------|---------|-----|--|--|
| 5 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | | |
| 24600 | 24600-50 | 24600-7 | 1 | | |
| 24602 | 24602-50 | 24602-7 | 2 | | |
| 24604 | 24604-50 | 24604-7 | 4 | | |
| 24605 | 24605-50 | 24605-7 | 5 | | |
| 24607 | 24607-50 | 24607-7 | 7.5 | | |
| 24610 | 24610-50 | 24610-7 | 10 | | |
| 24615 | 24615-50 | 24615-7 | 15 | | |
| 24620 | 24620-50 | 24620-7 | 20 | | |
| 24625 | 24625-50 | 24625-7 | 25 | | |
| 24630 | 24630-50 | 24630-7 | 30 | | |



GLASS FUSES

Replaces SFE Fuses



| | SFE Style Fuses | | | | |
|-------------------------|--------------------|---------|-----|--|--|
| 3 Pcs Retail Clam | 50 Pcs Poly Bag | Bulk | Amp | | |
| 24703 | 24703-50 | 24703-7 | 3 | | |
| 24706 | 24706-50 | 24706-7 | 6 | | |
| 24707 | 24707-50 | 24707-7 | 7.5 | | |
| 24709 | 24709-50 | 24709-7 | 9 | | |
| 24714 | 24714-50 | 24714-7 | 14 | | |
| 24720 | 24720-50 | 24720-7 | 20 | | |
| 24730 | 24730-50 | 24730-7 | 30 | | |
| | | | | | |



GLASS FUSES






What a BRILLIANT Fuse Idea™!



MIDBLADE[™] – MINBLADE[™] ILLUMINATING LED FUSES... FOR ALL 12 VOLT VEHICLES



- Ideal for Automotive, Marine, Agricultural, RV and More!
- Save Time and Remove the Guesswork Searching for a Burned Out Fuse
- Ideal for those Hard to See Areas!
- Each Fuse is Color Coded to Indicate the Amperage
 All Feature an Enclosed Element to Prevent Shocks, Sparks and Corrosion
 - Designed to OEM Specifications

MIDBLADE[™] LED FUSES

#24400 – 5 Pack Assortment: 1 Each – 10, 15, 20, 25, 30A

| #24403 - | 10 Pack Assortment: |
|----------|----------------------|
| | 2 Each – 10, 15, 20, |
| | 25, 30A |
| | |

| Part # | 50 Pcs. | Amps | Color |
|---------|----------|------|--------|
| 24303-7 | 24303-50 | 3 | Purple |
| 24305-7 | 24305-50 | 5 | Amber |
| 24307-7 | 24307-50 | 7.5 | Brown |
| 24310-7 | 24310-50 | 10 | Red |
| 24315-7 | 24315-50 | 15 | Blue |
| 24320-7 | 24320-50 | 20 | Yellow |
| 24325-7 | 24325-50 | 25 | Clear |
| 24330-7 | 24330-50 | 30 | Green |
| | | | |



Replaces ATO/ATC Fuses

MINBLADE™ LED FUSES

#24100 – 5 Pack Assortment: 1 Each – 10, 15, 20, 25, 30A #24103 – 10 Pack Assortment: 2 Each – 10, 15, 20, 25, 30A

Rons

| Part # | 50 Pcs. | Amps | Color |
|---------|----------|------|--------|
| 24003-7 | 24003-50 | 3 | Purple |
| 24005-7 | 24005-50 | 5 | Amber |
| 24007-7 | 24007-50 | 7.5 | Brown |
| 24010-7 | 24010-50 | 10 | Red |
| 24015-7 | 24015-50 | 15 | Blue |
| 24020-7 | 24020-50 | 20 | Yellow |
| 24025-7 | 24025-50 | 25 | Clear |
| 24030-7 | 24030-50 | 30 | Green |
| | | | |



Replaces ATM/Mini Fuses

SELF STRIPPING ATO/ATC FUSE HOLDERS • No Need to Strip Wire (Fuse and lead wires not included) • Rated to 40 Amps Open • Fits 14 18 Gauge Wire Position • Simply Insert Each Wire and Crimp the Holder Closed, then Insert Fuse to Complete the Circuit RoHS #31855-7 **Insert Fuse! Insert wire Crimp closed** #31855-50

SINGLE FUSE BLOCK FOR MAXI BLADE FUSES

- Rated 60 Amps Max
- Material:
 - Body: Nylon (Ul Flame:94-0)
 - Terminal: Plated Brass
- Fuse Not Included





HEAVY DUTY MAXI FUSE HOLDER WITH COVER

- Rated 60 Amps Max
- 6" Loop Length with 8-Gauge Wire
- Fuse Not Included



#31860 #31860-7 #31860-10



FAST ACTING AUTOMOTIVE MidiDoc™ LIMITER FUSE

• For Use With #24226-7 or #24227-7 Fuse Blocks

Amps

50

80

100

150

• 30mm Center to Center Bolt-On

RoHS

Part #

24215-7

24218-7

24221-7

24225-7

- Interrupting Rating: 1000A @ 32VDC
- Operating Temperature: -40° $^{\sim}$ 125°C



FUSE BLOCK FOR MidiDoc[™] LIMITER FUSES WITH PROTECTIVE COVER

Color

Red

Natural

Blue

Grey

- Use with MidiDoc™ Limiter Fuses
- Lexan Protective Cover Prevents Accidentally Touching Exposed Terminal Studs
- Voltage Rating: 32 VDC
- Rated 300A Max
- Phenolic Laminate, Flame Retardant Base



#24227-7


Rons

P

Battery Doctor[®] Fast Acting heavy duty fuse limiters are recommended for use with high power DC, golf carts, forklifts, marine and other large battery applications.

FAST ACTING OPEN LINK FUSE LIMITER

| Bakeli nterru |
|------------------|
| 1000A |
| 500A |
| /oltage |
| |
| - |
| |
| |



- Fast Acting Automotive/Marine Limiter
- Bakelite/Gold Plated Copper Interrupting Rating:
- 1000A @ 32VDC
- 1500A @250VAC Voltage Rating: 250VAC, 32VDC



MidiDoc[™] FUSE HOLDER WITH REMOVABLE COVER

- Use with MidiDoc™ Limiter Fuse
- Rated 30A 100A Max
- Voltage Raging: 32 VDC
- Includes 2 Eyelets for E-Z Hold Down Mounting
- Terminals: M5 Nickel Plated Steel Threaded Studs with Hex Nuts
- Material
- Base: PBT (UL flame: 94V-0)
- Cover: Nylon (UL flame: 94V-0)



#24226-7

FUSE BLOCK FOR OPEN LINK STYLE FUSE LIMITERS WITH PROTECTIVE COVER

- Use with Fast Acting Fuse Limiters
- Not to Exceed 300 Amps
- 125VAC
- Material:
- Base: Polyester Impact/Electrical Black with Mineral and Glass Fiber Added ULR Cert #E40654
- Cover: Polycarbonate UL 94V-0



ATO/ATC MIDBLADE™ TAPA CIRCUIT™ DUAL FUSE HOLDER

DESIGNED FOR USE WITH ISO 8820 ATO/ATC FUSES, SAE J1284-ATO/ATC FUSES, AND UL 275A STANDARD-ATO/ATC FUSES.

- Turns One Fuse Slot Into Two!
- Plugs into Occupied or Vacant Energized Fuse Block Slot
- Provides One Fuse Holder to Protect Existing Circuit and a Second Fuse Holder to
 Protect New Circuit
- 10 Amp Rating at 12 Volts
- 16-Gauge Wire for New Circuit is 5" Long; Includes Insulated Crimp-Type Coupler
- ATO/ATC MidBlade™ Fuse Not Included



#30003-7

IN-LINE ATO/ATC MIDBLADE™ FUSE HOLDER

- 30 Amp In-Line Fuse Holder for MidBlade™ Fuses with Water Resistant Cap
- 12-Gauge Wire
- Loop Length is 5 1/2"
- 30 Amp Fuse Included



For information on our Mini Fuse Tapa

Circuit™ Fuse Holder #30103, please

see page 33

#31820

RoHS

#31820-7

#31820-10

IN-LINE ATO/ATC MIDBLADE™ STACKABLE FUSE HOLDER

- 30 Amp In-Line ATO/ATC MidBlade™ Fuse Holder with Water Resistant Cover
- Loop Length: 5 ½", Overall 12-Gauge Wire is 11"
- 30 Amp Fuse Included

RoHS

#31815-7





LED ATO/ATC MIDBLADE™ FUSE HOLDER

- Built-In LED for Identification of Blown Fuse
- 30 Amp In-Line ATO/ATC MidBlade™ Fuse Holder with 12-Gauge Wire
- 6" Wire Leads on Each Side for a Total Length of 12"
- 30 Amp Fuse Included

RoHS

#24415-7



IN-LINE ATO/ATC MIDBLADE™ HEAVY DUTY FUSE HOLDER

- 30 Amp In-Line MidBlade[™] Fuse Holder with 12-Gauge Wire
- 12" Loop Length
- 30 Amp ATO/ATC MidBlade™ Fuse Included

#31813 #31813-7 #31813-10

MEDIUM DUTY ATO/ATC MIDBLADE™ FUSE HOLDER

- Rated 20 Amps Max
- 12" Loop Length with 14-Gauge Wire
- ATO/ATC MidBlade™ Fuse Not Included



LIGHT DUTY ATO/ATC MIDBLADE™ FUSE HOLDER

- Rated 15 Amps Max
- 12" Loop Length with 16-Gauge Wire
- Fuse Not Included





#31816-10

WEATHERPROOF ATO/ATC MIDBLADE™ **FUSE HOLDER**

• Two 4" 12-Gauge Wire Leads



• Rated to 30 Amps



#31850 #31850-7 #31850-10

WATERPROOF IN-LINE GLASS FUSE HOLDER

- For AGC and SFE Glass Fuses
- Accepts 12-18 Gauge Wire
- Yellow Neoprene Material for Easy Visibility
- Rated 30 Amps Max
- Fuse Not Included



#31808

#31808-7

HEAVY DUTY IN-LINE GLASS FUSE HOLDER

Designed for Heavy Duty Applications Including Air Conditioners and Heater Blower Motors.

- 12-Gauge 8" Wire Loop for Easy Connection
- Uses Standard AGC and SFE Fuses
- Rated 30 Amps Max
- Fuse Not Included

#31802

#31802-7 #31802-10 70115

UNIVERSAL IN-LINE ATO/ATC MIDBLADE™ **FUSE HOLDER WITH COVER**

- 30 Amp Fuse Holder
- Accepts 12-Gauge and Smaller Wire



#31840-7

UNIVERSAL IN-LINE GLASS FUSE HOLDER

- For AGC and SFE Glass Fuses
- "Snap-Lock "Provides Strong Positive Union of Fuse Holder Housing
- High Visibility Yellow
- Rated 30 Amps Max
- Accepts 12-18 Gauge Wire
- Nylon Fuse Holder for Normal Environments
- Simple Crimp Assembly
- Fuse Not Included



MEDIUM DUTY IN-LINE GLASS FUSE HOLDER

- 20 Amp In-Line Fuse Holder for AGC and SFE Fuses with 14-Gauge Wire
- Durable Locking Cap
- 8" Wire Loop
- Fuse Not Included



ATM/MINI MINBLADE™ FUSE TAPĂ CIRCUIT™ DUAL FUSE HOLDER

DESIGNED FOR USE WITH ISO 8820 FUSES, SAE J2077 FUSES, AND UL 275A STANDARD FUSES.

- Turns One Fuse Slot into Two!
- Plugs into Occupied or Vacant Energized Fuse Block Slot
- Provides One Fuse Holder to Protect Existing Circuit and a Second Fuse Holder to **Protect New Circuit**
- 10 Amp Rating at 12 Volts
- 16-Gauge Wire for New Circuit is 5" Long; Includes Insulated Crimp-Type Coupler

#30103-10 10 SAE

• Fuse Not Included

#30103

#30103-7


IN-LINE ATM MINBLADE™ STACKABLE MINI-FUSE HOLDER

- 30 Amp ATM/MinBlade™ Fuse Holder with 12-Gauge Wire
- Weather Resistant Cover
- 5 1/2" Wire Leads

ROHS

#31830-7

• 30 Amp Fuse Included



LED ATM/MINI MINBLADE[™] FUSE **HOLDER WITH COVER**

- Built-In LED for Identification of Blown Fuse
- 30 Amp In-Line ATM/MinBlade™ Fuse Holder with 12-Gauge Wire and Water Resistant Cover
- 6" Wire Leads on Each Side for a Total Length of 12"



IN-LINE ATM/MINI MINBLADE™ FUSE HOLDER WITH RING TERMINALS

- Contains 15 Amp Mini Fuse with Ring Terminals (3/8" Dia.) Attached to 3 1/4" Wire Leads
- Overall 16-Gauge Black Wire is 10 1/8"
- 15 Amp Fuse Included



#20311-7

IN-LINE ATM/MINI MINBLADE™ FUSE HOLDER WITH COVER

- 20 Amp In-Line ATM/MinBlade™ Fuse Holder with 16-Gauge Wire
- Water Resistant Cover
- Two 6" Wire Leads
- Fuse Not Included



RoHS #31827

#31827-7

#31827-10

WEATHERPROOF ATM/MINI MINBLADE™ **FUSE HOLDER**

- Rated 30 Amps Max
- 5" Wire Leads with 12-Gauge Wire
- Fuse Not Included



LOW PROFILE APS TAPA CIRCUIT™ DUAL FUSE HOLDER

- Turns One Fuse Slot into Two!
- Plugs into Occupied or Vacant Energized Fuse Block Slot
- Provides One Fuse Holder to Protect Existing Circuit and a Second Fuse Holder to Protect New Circuit
- Primary Circuit: 25 Amp Max Rating at 12 Volts
- Auxiliary Circuit: 15 Amp Max Rating at 12 Volts
- 16-Gauge Wire for New Circuit is 5" Long
- Use with APS Fuses
- Fuse Not Included



LOW PROFILE APS IN-LINE FUSE HOLDER WITH WATER RESISTANT COVER

• Rated 10 Amps Max

#30105 #30105-7 #30105-10

- 6" Wire Leads with 18-Gauge Wire
- Fuse Not Included

RoHS

#30106-7



LOW PROFILE APS IN-LINE FUSE HOLDER WITH SPLASH PROOF COVER

- Rated 20 Amps Max
- 5" Wire Leads with 14 -Gauge Wire
- Fuse Not Included

Rons

#30104

#30104-7



MICRO² MINBLADE^{2™} TAPA CIRCUIT[™] DUAL FUSE HOLDER

- Turns One Fuse Slot into Two!
- Plugs into Occupied or Vacant Energized Fuse **Block Slot**
- Provides One Fuse Holder to Protect Existing Circuit and a Second Fuse Holder to Protect New Circuit
- Primary Circuit: 25 Amp Max Rating at 12 Volts
- Auxiliary Circuit: 15 Amp Max Rating at 12 Volts
- 16-Gauge Wire for New Circuit is 5" Long
- Use with APT/Micro² Fuses
- Fuse Not Included



#30203-7

#30203-10

WIRE NUTS

- Rated to 300 Volt Max
- Make quick secure connections for positive continuity
- Reusable for easy circuit changes and addition

| Part # | Gauge (AWG) | Quantity |
|--------|----------------|----------|
| 80888 | 14-10 | 5 |
| 80889 | 14-10 | 100 |
| 80886 | 18-10 | 5 |
| 80887 | 18-10 | 100 |
| 80884 | 18-14 | 5 |
| 80890 | 18-14 | 100 |
| 80882 | 22-14 | 5 |
| 80883 | 22-14 | 100 |
| 80880 | 22-18 | 5 |
| 80881 | 22-18 | 100 |

Gauge





ATO/ATC MIDBLADE™ FUSE BLOCKS

- 30 Amps Per Circuit at 12 Volt DC
- Blocks Accommodate 4 to 12 Fuses
- ATO/ATC Blade Fuse Holder for ${}^{1}\!\!\!/ 4"$ Slip-On Terminals
- Clear Acrylic Dust Cover with Bolt-Style Screw Included

ROHS

IP65 Rated-Dust Proof

d

| Part # | Bulk | Description | Α | В | С | D |
|--------|---------|-------------|------|------|-------|-------|
| 30110 | 30110-7 | 4-Way Case | 42mm | 52mm | 65mm | 86mm |
| 30111 | 30111-7 | 6-Way Case | 42mm | 52mm | 93mm | 116mm |
| - | 30112-7 | 8-Way Case | 42mm | 52mm | 130mm | 153mm |
| - | 30113-7 | 10-Way Case | 42mm | 52mm | 158mm | 163mm |
| - | 30114-7 | 12-Way Case | 42mm | 52mm | 188mm | 210mm |

COMPACT ATO/ATC MIDBLADE™ AND ATM/MINI MINBLADE™ FUSE BLOCKS

- 30 Amps Per Circuit at 12 Volt DC
- Blocks Accommodate 4 to 10 Fuses
- Terminal Connector Slip-On
- Snap On/Off Clear Dust Cover

| ATO/ATC MidBlade™ | | | | | | | |
|-------------------|-------------|--------|------|-------|-------|--|--|
| Part # | Description | Α | В | С | D | | |
| 31000-7 | 4-Way Case | 36.5mm | 27mm | 65mm | 80mm | | |
| 31003-7 | 6-Way Case | 36.5mm | 27mm | 85mm | 100mm | | |
| 31005-7 | 8-Way Case | 36.5mm | 27mm | 105mm | 120mm | | |
| 31007-7 | 10-Way Case | 36.5mm | 27mm | 115mm | 140mm | | |

- ATM/MinBlade ${}^{\rm M}$ Fuse Holder for ${}^{\rm M}_{\rm 4"}$ Slip-On Terminals
- 15 Amps Per Circuit at 12 Volt DC
- Includes Water Resistant Dust Cover with Rubber Seal
- Contact: Nickel Plated Copper Alloy
- Cover Material: Polycarbonate
- Base Material: Nylon Ul 94V-0


| | arren (| |
|--------------|----------------|---|
| YES | CHARLEN IN THE | |
| 0 | PARALLEL | 2 |
| C. S. Market | | |

ROHS

| ATM/Mini MinBlade™ | | | | | | | |
|----------------------------|-------------|--------|------|-------|-------|--|--|
| Part # Description A B C D | | | | | | | |
| 31010-7 | 4-Way Case | 36.5mm | 27mm | 65mm | 80mm | | |
| 31013-7 | 6-Way Case | 36.5mm | 27mm | 85mm | 100mm | | |
| 31015-7 | 8-Way Case | 36.5mm | 27mm | 105mm | 120mm | | |
| 31017-7 | 10-Way Case | 36.5mm | 27mm | 115mm | 140mm | | |


SINGLE LED FUSE ATO/ATC MIDBLADE™ HOLDER


- For Use with ATO/ATC Fuses Only
- LED Enclosed in Fuseholder, Glows When Fuse is Blown
- Includes Clear Dust Cover, Snaps into Base
- Rated: 12-24 Volt DC, 30 Amp Maximum
- Base: Nylon Body (UL Flame: 94V-2)
- Cover: Polycarbonate (UL Flame: 94V-2)





(Fuse not Included)





ATO/ATC MIDBLADE™ FUSE PANELS

Use with automotive fuses or plug-in circuit breakers. #10-32 stud terminal with hex nut, flat washer and lock washer supplied. Four .218" diameter mounting holes for #10 screws.

- Base: Polycarbonate
- Cover: Clear polycarbonate
- Maximum Amperage Per Circuit: 25 Amps
- Maximum Voltage: 32VDC
- Maximum Amperage Per Block: 150 Amps



| | ATO/ATC Fuse Panels | Produ | ct Dime | ensions | | |
|---------|---|-------|---------|---------|------------------|---------------|
| Part # | Description | L | w | н | Common Ground | Dust Cover |
| 31020-7 | 6-Way ATO/ATC Fuse Panel | 3.36" | 2.51" | 0.83" | | |
| 31050-7 | 6-Way ATO/ATC Fuse Panel with Cover | 3.36" | 2.51" | 1.10" | | х |
| 31030-7 | 6-Way ATO/ATC Fuse Panel with Common Ground | 3.36" | 2.51" | 0.83" | х | |
| 31060-7 | 6-Way ATO/ATC Fuse Panel with Common Ground and Cover | 3.36" | 2.51" | 1.10" | х | х |
| 31023-7 | 8-Way ATO/ATC Fuse Panel | 3.36" | 3.13" | 0.83" | | |
| 31052-7 | 8-Way ATO/ATC Fuse Panel with Cover | 3.36" | 3.13" | 1.10" | | х |
| 31033-7 | 8-Way ATO/ATC Fuse Panel with Common Ground | 3.36" | 3.13" | 0.83" | х | |
| 31062-7 | 8-Way ATO/ATC Fuse Panel with Common Ground and Cover | 3.36" | 3.13" | 1.10" | х | х |
| 31025-7 | 10-Way ATO/ATC Fuse Panel | 3.36" | 3.74" | 0.83" | | |
| 31054-7 | 10-Way ATO/ATC Fuse Panel with Cover | 3.36" | 3.74" | 1.10" | | х |
| 31027-7 | 12-Way ATO/ATC Fuse Panel | 3.36" | 4.39" | 0.83" | | |
| 31056-7 | 12-Way ATO/ATC Fuse Panel with Cover | 3.36" | 4.39" | 1.10" | | х |

ATO/ATC MIDBLADE™ & ATM/MINI MINBLADE™ FUSE PANELS

| ATO/ATC Fuse Panels with LED Indicators and Cover | | Р | roduct Dime | ensions |
|---|-------------------------------|-------|-------------|---------|
| Part # | Description | L | W | Н |
| 31074-7 | 4-Way ATO/ATC LED Fuse Panel | 3.36" | 1.85" | 1.46" |
| 31076-7 | 6-Way ATO/ATC LED Fuse Panel | 3.36" | 2.51" | 1.46" |
| 31080-7 | 10-Way ATO/ATC LED Fuse Panel | 3.36" | 3.74" | 1.46" |

| ATM/Mini Fuse Panels with LED Indicators and Cover | | F | Product Dimer | nsions |
|--|--------------------------------|-------|---------------|--------|
| Part # | Description | L | W | Н |
| 31086-7 | 4-Way ATM/Mini LED Fuse Panel | 3.35" | 1.85" | 1.46" |
| 31087-7 | 6-Way ATM/Mini LED Fuse Panel | 3.35" | 2.48" | 1.46" |
| 31088-7 | 10-Way ATM/Mini LED Fuse Panel | 3.35" | 3.74" | 1.46" |

| ATM/Min | ATM/Mini Fuse Panels with Cover P | | duct Dim | | |
|---------|--|-------|----------|----------|--------|
| Part # | Description | L | W | | н |
| 31082-7 | 4-Way ATM/Mini Fuse Panel | 3.35" | 1.85" | | 1.46" |
| 31083-7 | 6-Way ATM/Mini Fuse Panel | 3.35" | 2.48 | r | 1.46" |
| 31084-7 | 10-Way ATM/Mini Fuse Panel | 3.35" | 3.74" | | 1.46" |
| | | | | | |
| APS/L | ow Profile Mini Panels with Cover | - | Produ | ct Dimer | nsions |
| Part # | Description | | L | W | н |
| 31090-7 | 10-Way APS/Low Profile Mini Fuse Panel | | 3.35" | 3.74" | 1.46" |
| 31091-7 | 10-Way APS/Low Profile Mini LED Fuse Panel | | 3.35" | 3.74" | 1.46" |

• 1/4" Spade Quick Connects


ROHS

- Lexan Dust Cover Included
- Base Material: Black Thermoplastic (UL Rated 94V-0)
- Maximum Current Rating: 30 Amps Per Circuit, 100 Amp Maximum Input
- LED Indicators Glow when Fuse is Blown (Open)





CIRCUIT PROTECTION

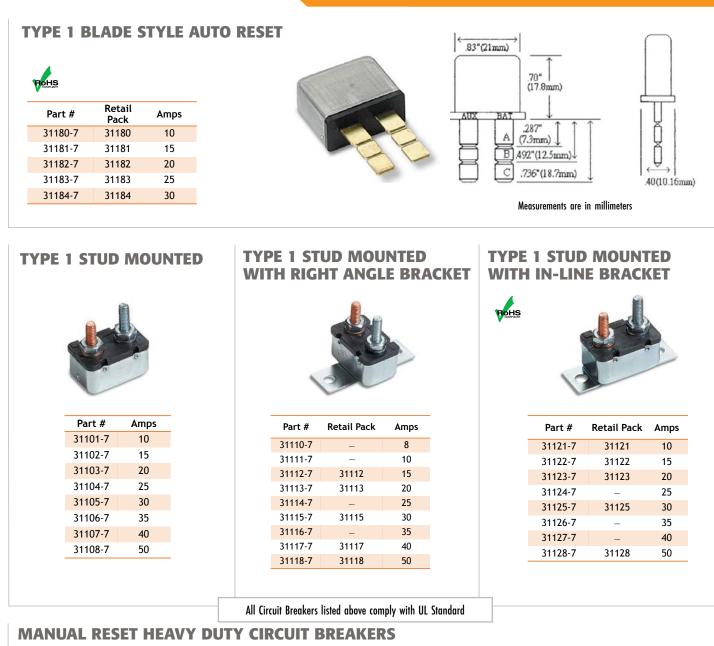

- Water Resistant
- Panel or Surface Mounted
- Complies with SAE Standard JI625

| Part # | Retail Pack | Amps |
|---------|-------------|------|
| 201-7 | 31201 | 80 |
| 31202-7 | 31202 | 100 |
| 31203-7 | _ | 120 |
| 31206-7 | 31206 | 150 |
| 31208-7 | _ | 180 |
| 31209-7 | _ | 200 |
| | | |

Car

TERMINALS

ALL BATTERY DOCTOR® TERMINALS COME IN A RESEALABLE BAG OR RETAIL CLAMSHELL



NYLON FEMALE QUICK DISCONNECTS

- Fully Insulated Connectors for Optimum Protection
- High Temperature Nylon Insulation Rated to 221°F (105°C)
- Maximum Voltage: 300V

| | - | |
|-------------|----------|--|
| Tab Size | Quantity | |

| | Part # | Gauge (AWG) | Tab Size | Quantity |
|---|--------|----------------|-------------|----------|
| | 80830 | 12-10 | .250 | 5 |
| | 80252 | 12-10 | .250 | 100 |
| | 80877 | 16-14 | .250 | 5 |
| | 80250 | 16-14 | .250 | 100 |
| | 80875 | 22-18 | .250 | 5 |
| | 80248 | 22-18 | .250 | 100 |
| - | | | | |

VINYL FEMALE QUICK DISCONNECTS

- General Purpose Vinyl Insulation Rated to 167°F (75°C)
- Maximum Voltage: 300V

| Part # | Gauge (AWG) | Tab Size | Quantity |
|--------|----------------|----------|----------|
| 80827 | 12-10 | .250 | 25 |
| 80286 | 12-10 | .250 | 100 |
| 80274 | 16-14 | .110 | 100 |
| 80824 | 16-14 | .187 | 25 |
| 80278 | 16-14 | .187 | 100 |
| 80280 | 16-14 | .205 | 100 |
| 80826 | 16-14 | .250 | 25 |
| 80284 | 16-14 | .250 | 100 |
| 80276 | 22-18 | .187 | 100 |
| 80282 | 22-18 | .250 | 100 |

NYLON CRIMP CAPS

- High Temperature Nylon Insulation Rated to 221°F (105°C)
- Maximum Voltage: 600V

| Part # | Gauge (AWG) | Quantity |
|--------|----------------|----------|
| 80825 | 8 | 25 |
| 80822 | 12-10 | 5 |
| 80823 | 12-10 | 25 |
| 80820 | 16-14 | 5 |
| 80821 | 16-14 | 100 |
| 80224 | 22-14 | 100 |
| | | |

NYLON MALE QUICK DISCONNECTS

- Fully Insulated Connectors for Optimum Protection
- High Temperature Nylon Insulation Rated to 221°F (105°C)
- Maximum Voltage: 300V

| Part # Gauge (AWG) Quantit |
|-------------------------------|
| (AWG) Qualitit |
| 00070 10 10 5 |
| 80878 12-10 5 |
| 80258 12-10 100 |
| 80876 16-14 5 |
| 80256 16-14 100 |
| 80874 22-18 5 |
| 80254 22-18 100 |

VINYL MALE QUICK DISCONNECTS

- General Purpose Vinyl Insulation Rated to 167°F (75°C)
- Maximum Voltage: 300V



| Part # | Gauge (AWG) | Tab Size | Quantity |
|--------|----------------|-------------|----------|
| 80829 | 12-10 | .250 | 25 |
| 80292 | 12-10 | .250 | 100 |
| 80828 | 16-14 | .250 | 25 |
| 80290 | 16-14 | .250 | 100 |
| 80288 | 22-18 | .250 | 100 |

MALE BULLET CONNECTORS

- Vinyl Insulation Rated to 167°F (75°C)
- Nylon Insulation Rated to 221°F (105°C)
- Maximum Voltage: 600V



NYLON BUTT CONNECTORS

- High Temperature Nylon Insulation Rated to 221°F (105°C)
- Maximum Voltage: 300V

| Part # | Gauge (AWG) | Quantity |
|--------|----------------|----------|
| 80807 | 12-10 | 25 |
| 80806 | 12-10 | 5 |
| 80211 | 12-10 | 100 |
| 80803 | 16-14 | 5 |
| 80804 | 16-14 | 25 |
| 80209 | 16-14 | 100 |
| 80800 | 22-18 | 5 |
| 80801 | 22-18 | 25 |
| 80207 | 22-18 | 100 |

VINYL BUTT CONNECTORS

- General Purpose Vinyl Insulation Rated to 167°F (75°C)
- Maximum Voltage: 300V

| Part # | Gauge (AWG) | Quantity |
|--------|----------------|----------|
| 80816 | 12-10 | 25 |
| 80217 | 12-10 | 100 |
| 80813 | 16-14 | 25 |
| 80215 | 16-14 | 100 |
| 80810 | 22-18 | 25 |
| 80213 | 22-18 | 100 |

TERMINALS

VINYL RING TERMINALS

- General Purpose Vinyl Insulation Rated to 167°F (75°C)
- Maximum Voltage: 600V





16-14 AW

RING TERMINAL

| Part # | Gauge | Stud Size | Quantity |
|--------|-------|-----------|----------|
| | (AWG) | | |
| 80334 | 12-10 | #8 | 100 |
| 80857 | 12-10 | 1/4" | 25 |
| 80346 | 12-10 | 1/4" | 100 |
| 80859 | 12-10 | 5/16" | 25 |
| 80350 | 12-10 | 5/16" | 100 |
| 80359 | 12-10 | 3/8" | 25 |
| 80357 | 12-10 | 3/8" | 100 |
| 80332 | 16-14 | #8 | 100 |
| 80845 | 16-14 | #10 | 25 |
| 80338 | 16-14 | #10 | 100 |
| 80847 | 16-14 | 1/4" | 25 |
| 80344 | 16-14 | 1/4" | 100 |
| 80849 | 16-14 | 5/16" | 25 |
| 80851 | 16-14 | 3/8" | 25 |
| 80354 | 16-14 | 3/8" | 100 |
| 80328 | 22-18 | #8 | 25 |
| 80330 | 22-18 | #8 | 100 |
| 80840 | 22-18 | #10 | 100 |

VINYL FORK/SPADE TERMINALS

- General Purpose Vinyl Insulation Rated to 167°F (75°C)
- Maximum Voltage: 600V

| Part # | Gauge (AWG) | Stud Size | Quantity |
|--------|----------------|-----------|----------|
| 80411 | 12-10 | #6 | 100 |
| 80417 | 12-10 | #8 | 100 |
| 80423 | 12-10 | #10 | 100 |
| 80409 | 16-14 | #6 | 100 |
| 80415 | 16-14 | #8 | 25 |
| 80421 | 16-14 | #8 | 100 |
| 80407 | 22-18 | #10 | 100 |
| 80838 | 22-18 | #6 | 100 |
| 80413 | 22-18 | #8 | 100 |
| 80419 | 22-18 | #10 | 100 |



NYLON RING TERMINALS

- General Purpose Nylon Insulation Rated to 167°F (75°C)
- Maximum Voltage: 600V



| Part # | Gauge (AWG) | Stud Size | Quantity |
|--------|----------------|-----------|----------|
| 80863 | 12-10 | #10 | 5 |
| 80864 | 12-10 | 1/4" | 5 |
| 80865 | 12-10 | 5/16" | 5 |
| 80852 | 16-14 | #10 | 5 |
| 80853 | 16-14 | 1/4" | 5 |
| 80854 | 16-14 | 5/16" | 5 |
| 80843 | 22-18 | #10 | 5 |
| | | | |



HEAT SHRINK BUTT CONNECTORS

- High Density Polyethylene Insulation Helps Keep Connection Dry
- Shrink Temperature: 302°F (150°C)
- Maximum Voltage: 600V




| Part # | Gauge (AWG) | Quantity |
|--------|----------------|----------|
| 80429 | 10-12 | 100 |
| 80428 | 16-14 | 100 |
| 80427 | 22-18 | 100 |

SELF TAPPING IDC CONNECTORS

- Quick, reliable, and convenient splices
- No stripping, twisting, soldering, or special tools required
- Use with solid copper single-conductor wire







E2000 BLUE® PROFESSIONAL GRADE ANTI-CORROSION GEL

Professional grade anti-corrosion gel for battery posts, terminals, agricultural and marine equipment, wire connections, plugs, electrolysis protection, battery trays, nuts and bolts. Rust protection for old and new metal. Patented Microscopic Mineralization Process forms a barrier in the metal and changes the Ph to 10 or above, eliminating a place for corrosion to start.



CABLE TIE ANCHOR

Fits 1/4" hole Accepts all standard 1/8" wide cable ties. Just thread cable tie through slotted head. (Cable Tie Not Included)



UV CABLE TIES


- UV Resistant Nylon
- Ideal for Organizing Cables
- 100 Pcs Poly Bag

| Part # | Length | Tensile | Color |
|--------|--------|---------|---------|
| 80104 | 4" | 18lbs | Black |
| 80105 | 4" | 18lbs | Natural |
| 80106 | 7" | 50lbs | Natural |
| 80107 | 7" | 50lbs | Black |
| 80108 | 8" | 40lbs | Black |
| 80110 | 8" | 40lbs | Natural |
| 80111 | 11" | 50lbs | Black |
| 80112 | 11" | 50lbs | Natural |
| 80113 | 14" | 50lbs | Natural |
| 80114 | 14" | 50lbs | Black |
| 80115 | 14" | 120lbs | Black |
| 80116 | 14" | 120lbs | Natural |





- Stud size: #10
- Cable clamps are specially designed to hold cables, tubes, and components
- Allows you to easily mount bundles of cables to walls, ceilings, or any other surface





CABLE TIE MOUNT

- UV Resistant Nylon
- Includes Adhesive Backing
- 100 Pcs Poly Bag



#80170 - 1" Black #80172 - 1" White #80175 - 3/4" Black

HEAT SHRINK TUBING

- 2-1 Shrink Ratio
- 25' Length on Each Spool



| Part # | Size | Color |
|--------|-------|-------|
| 80700 | 1/16" | Black |
| 80702 | 1/8" | Black |
| 80704 | 3/16" | Black |
| 80706 | 1/4" | Black |
| 80708 | 3/8" | Black |
| 80710 | 1/2" | Black |
| 80712 | 3/4" | Black |
| 80714 | 1" | Black |
| | | |



UNIVERSAL TRAILER WIRE

- Universal 2-Pole Flat Connector
- 16" Leads with 18-Gauge Wire
- E-Z Connect Bullets





#20079-10

COMPLETE TRAILER CONNECTOR

- Male and Female Ends
- Color Coded 18 Gauge Wires
- 12" Long



#80900 - 3-Way Flat #80901 - 4-Way Flat

7-WAY TO 4-WAY FLAT **TRAILER ADAPTER**

- Heavy Duty Blade
- Fits the Factory 7-way Plug on Most Trucks with a Tow Package
- Allows You to Tow Almost Any Trailer



4-WAY TOW VEHICLE END

- 4-Way Circuit Connectors for Female or Car End
- Standard RVI Color Code for Ease of Installation



#80908 - 12" Pigtail Harness **#80909** - 48" Wishbone Harness **#80910** - 60" Bonded Harness

7-WAY TRAILER PLUG COVER


- Prevents Bugs, Dirt, and Water from Damaging Trailer Plua
- Attaches to Trailer Plug for Convenience and Ease of Use
- Snaps to Cord when Plug is in Use
- See Page 47 for Retail Counter Display



#20081 #20081-7

4-WAY TRAILER END

- Wishbone design for superior trailer harness
- Standard RVI color code
- Male plug



7-WAY PLASTIC BLADE TYPE **CONNECTOR PLUG AND TRAILER END**

- Vinyl Inserts Keep Out Dirt and Moisture
- Features Dual Grips for Easy Removal



WATERBOY™ BATTERY FILLER

Battery Doctor $^{\circ}$ double action valve with shut-off nozzle stops the flow to prevent overfilling.

- Heavy Duty Injected Molded Body
- 2 Quart Capacity



#20420

BATTERY CLEANING BRUSH

- Heavy Duty Outer Metal Brush for Removing Corrosion and Rust from Posts and Terminals
- Inner Bristles Fit and Clean Standard Battery Posts
- Remove Cap to Reveal Brush
- Metal Case



Spout

6oz. Capacity

#21000-7 - Metal Body

#21003-7 - Polymer Body

BATTERY FLUID FILLER WITH FLEX BULB

- One Piece Construction Prevents Leaks at Bulb Area
- Acid Resistant
- Overall Length: 10"
- Material Made of SBR/PP

#20410

4-WAY TRAILER TEST LIGHT

- Helps to Properly Install a 4-Way Connector Without a Trailer Attached
- Plugs Into Your Existing Car-End Connector



T-HANDLE BRUSH SIDE TERMINAL CLEANER

• Brush Easily Removes Rust and Corrosion from Side Terminals



T-HANDLE BRUSH TOP POST PLASTIC BODY TERMINAL CLEANER

Shown Fitted on #20420

• Inner Brush Easily Removes Rust and Corrosion from Battery Posts



(Polymer Body)

#21006-7

WATERBOY[™] BATTERY FILLER EXTENSION

CIRCUIT & SPARK PLUG TESTER

HOSE

 24" Extended Hose Makes it Easy to Reach Tucked

Away Batteries

Easy to Assemble
Fits Waterboy™ #20420

• Hose Only

#20425

High quality tester instantly locates wiring problems such as bad connections, faulty or broken wires and sockets in 12 volt - 24 volt systems. A light will shine if the battery's condition is sound. No light will be visible if there is a short circuit or the battery is low.

- Overall Length: 8" with a Full 45" Lead Wire
- Includes Alligator Ground Clip, 3" Metal Probe with Cap




SELF-ADJUSTING WIRE STRIPPER

- Strips and Cuts 10-26 AWG Wires
- Crimps Insulated and Uninsulated Terminals
- Strips Multi-Lead Trailer Wire without Harming Strands



ALL PURPOSE HAND TOOL

- For use with 22-10 AWG Wires
- Strips Wire and Crimps Terminals
- Features Wire and Bolt Cutters




J-TYPE BATTERY HOLD-DOWN BOLTS

Heavy duty tempered steel "J" bolts with wing nuts and protective rubber washers to attach battery to tray. Use with Replacement Trays #21085 or #21087 1/4" thread.

• 1/4" Threaded Rod on J-Bolts (Pair)

RoHS



UNIVERSAL ADJUSTABLE BATTERY HOLD-DOWN

Fits the top of any Group Battery! Battery Doctor[®] hold-down secures the battery to the small or large "Replacement Battery Tray" (sold separately). Adjustable to size. Our

corrosion resistant vinyl-coated low carbon steel hold-down comes with two 8 1/2" "J" steel bolts and wing nuts for securing the hold-down to the battery and thus the battery to the bottom tray (sold separately). 5/16" thread Fits battery width 4 1/2"-7".



#21073-7 Total

UNIVERSAL SIDE TERMINAL BATTERY WRENCH

Designed for installing and removing OEM 5/16" side terminal bolts. Reversible ratcheting wrench features an easy grip handle. Fits all standard side mount bolts

• 5 " Long



#21020

HARNESS WITH RING TERMINALS

- For Use with Battery Doctor[®] Chargers
- 15 Amp Fuse Protected
- 5/16" Eyelets
- 16 AWG
- 19.5" Long

#20075

#20075-7



REPLACEMENT BATTERY TRAY

Hiah auality replacement battery tray. Black vinyl-coated metal (16-aauae) battery tray provides a sturdy battery base. Coated to resist corrosion, rust and battery movement! Slotted drain holes eliminate moisture build up and condensation.

#21085 - Small Tray (11" x 7" x 1 ") for Group 24 **Batteries** #21087 - Large Tray (13" x 7" x 1 ") for Group 27-31 **Batteries**



SIDE TERMINAL TO POST TERMINAL **CONVERTERS**

Converts side terminal batteries to accept top terminal battery cables and accessories. Die cast lead with zinc plated steel stud. Posts have 3/8" threaded stud to screw into side terminal batteries. Makes for easy charging with conventional charging equipment.

#20253-7 - Positive and Negative Post Pair #20305-7 - Negative Post #20306-7 - Positive Post



BATTERY TERMINAL MARKERS

Highly visible identification of terminals helps prevent damage to battery and alternator. 1" diameter, self-adhesive markers in red and black with large

raised "+" and "-" symbols. Packaged in pairs of positive and negative.

#20250 #20250-7

BATTERY BRUSH Plastic handled brush with two metal bristle brushes.

Cleans side terminals and battery contacts. 5%" hex in handle services GM connectors.





#21009-7

ALLIGATOR CLIPS

- For Use with Battery Doctor[®] Chargers
- 16 AWG Wire
- 20" Long
- Plug and Play Bullet Connections



#20073-7

PRIMARY WIRE

PAIRED PRIMARY WIRE SPOOLS

- PVC Insulation Ideal for General Purpose Applications (-40°F to 167°F)
- Resistant to Grease, Oil, Gasoline, Acid, Solvents, Moisture and Aging

| Part # | Gauge (AWG) | Color | Spool Length | |
|--------|----------------|-----------|-----------------|---|
| 80048 | 18 | Red/Black | 500' | |
| 80050 | 16 | Red/Black | 500' | |
| 80052 | 14 | Red/Black | 500' | 9 |

CROSSLINK (GXL) PRIMARY WIRE

- XLPE Insulation is Made for High Temperature Applications (-59°F to 257°F)
- High Resistant to Grease, Oil, Gasoline, Acid, Solvents, Moisture and Aging
- High Resistance to Cuts and Abrasions
- Complies with SAE J1128



| Gauge: 10 AWG | | | | | | | |
|---------------|-------|-----------|------|--|--|--|--|
| | 81000 | Black | 100' | | | | |
| | 81001 | Blue | 100' | | | | |
| | 81002 | Brown | 100' | | | | |
| | 81003 | Green | 100' | | | | |
| | 81004 | Orange | 100' | | | | |
| | 81005 | Red | 100' | | | | |
| | 81006 | White | 100' | | | | |
| | 81007 | Yellow | 100' | | | | |
| | | | | | | | |
| | Gau | ge: 12 AV | VG | | | | |
| | 81008 | Black | 100' | | | | |
| | 81009 | Blue | 100' | | | | |
| | 81010 | Brown | 100' | | | | |
| | 81011 | Green | 100' | | | | |
| | 81012 | Red | 100' | | | | |
| | 81013 | White | 100' | | | | |
| | 81014 | Yellow | 100' | | | | |

| Gau | uge: 14 A | ₩G | | | | |
|-------|-----------|------|--|--|--|--|
| 81015 | Black | 100' | | | | |
| 81016 | Blue | 100' | | | | |
| 81017 | Brown | 100' | | | | |
| 81018 | Green | 100' | | | | |
| 81019 | Orange | 100' | | | | |
| 81020 | Red | 100' | | | | |
| 81021 | White | 100' | | | | |
| 81022 | Yellow | 100' | | | | |
| 81023 | Black | 500' | | | | |
| 81024 | Blue | 500' | | | | |
| 81025 | Brown | 500' | | | | |
| 81026 | Green | 500' | | | | |
| 81027 | Orange | 500' | | | | |
| 81028 | Red | 500' | | | | |
| 81029 | White | 500' | | | | |
| 81030 | Yellow | 500' | | | | |
| | | | | | | |

| Gauge: 16 AWG | | | | |
|----------------|------------------------|----------------------|--|--|
| 81031 | Black | 100' | | |
| 81032 | Blue | 100' | | |
| 81033 | Brown | 100' | | |
| 81034 | Green | 100' | | |
| 81035 | Orange | 100' | | |
| 81036 | Red | 100' | | |
| 81037 | White | 100' | | |
| 81038 | Yellow | 100' | | |
| | | | | |
| Gau | ige: 18 AW | /G | | |
| 81039 | Black | 100' | | |
| | Diach | 100 | | |
| 81040 | Blue | 100 | | |
| 81040 81041 | | | | |
| | Blue | 100' | | |
| 81041 | Blue Brown | 100' 100' | | |
| 81041 81042 | Blue Brown Green | 100' 100' 100' | | |

PRIMARY WIRE

PRIMARY WIRE

- PVC Insulation Ideal for General Purpose Applications (-40°F to 167°F)
- Resistant to Grease, Oil, Gasoline, Acid, Solvents, Moisture and Aging
- Complies with SAE J1128

| Gau | ıge: 8 AW | G | J | Gau | ıge: 14 AV | VG | | Gau | ge: 16 AV | /G |
|----------------|--------------|--------------|---|-------|------------|-------|---|-------|-----------|------|
| 81046 | Black | 50' | | 81074 | Black | 100' | | 81098 | Black | 100' |
| 81047 | Red | 50' | | 81075 | Blue | 100' | | 81099 | Blue | 100 |
| | | | | 81076 | Brown | 100' | | 81100 | Brown | 100 |
| | ge: 10 AW | | | 81077 | Grey | 100' | | 81101 | Green | 100 |
| 80040 | Black | 100' | | 81078 | Green | 100' | | 81102 | Orange | 100 |
| 81048 | Blue | 100' | | | | 100' | | 81103 | Red | 100 |
| 81049 | Brown | 100' | | 81079 | Orange | | | 81104 | White | 100 |
| 81050 | Green | 100' | | 81081 | Pink | 100' | | 81105 | Yellow | 100 |
| 81051 | Orange | 100' | | 81082 | Purple | 100' | | 80022 | Black | 500 |
| 80042 | Red | 100' | | 81083 | Red | 100' | | 80020 | Blue | 500 |
| 81052 | White | 100' | | 81084 | Violet | 100' | | 81106 | Brown | 500 |
| 81053 | Yellow | 100' | | 81085 | White | 100' | | 80024 | Green | 500 |
| 81054 | Black | 500' | | 81086 | Yellow | 100' | | 80026 | Red | 500 |
| 81055 | Blue | 500' | | 80032 | Black | 500' | | 80028 | White | 500 |
| 81056 | Brown | 500' | | 81087 | Blue | 500' | | 80030 | Yellow | 500 |
| 81057 | Green | 500' | | 81088 | Brown | 500' | г | | 10.11 | |
| 81058 81059 | Red White | 500' 500' | | | | 500' | l | | ge: 18 AV | |
| 81059 | Yellow | 500' | | 81089 | Green | | | 81107 | Black | 100 |
| 01000 | Tellow | 300 | | 80034 | Red | 500' | | 81108 | Blue | 100 |
| Gau | ge: 12 AW | /G | | 81090 | White | 500' | | 81109 | Brown | 100 |
| 81061 | Black | 100' | | 81091 | Yellow | 500' | | 81110 | Green | 100 |
| 81062 | Blue | 100' | | 81092 | Blue | 1000' | | 81111 | Red | 100 |
| 81063 | Brown | 100' | | 81093 | Brown | 1000' | | 81112 | White | 100 |
| 81064 | Green | 100' | | 81094 | Green | 1000' | | 81113 | Yellow | 100 |
| 81065 | Orange | 100' | | 81095 | Red | 1000' | | 80002 | Black | 500 |
| 81066 | Red | 100' | | 81096 | White | 1000' | | 80000 | Blue | 500 |
| 81067 | White | 100' | | 81097 | Yellow | 1000' | | 80004 | Brown | 500 |
| 81068 | Yellow | 100' | _ | | | | | 80006 | Green | 500 |
| 80036 | Black | 500' | | | | | | 80008 | Grey | 500 |
| 81069 | Blue | 500' | | | | | | 80010 | Orange | 500 |
| 81070 | Brown | 500' | | | | | | 80012 | Purple | 500 |
| 81071 | Green | 500' | | | | | | 80014 | Red | 500 |
| 80038 | Red | 500' | | | | | | 80016 | White | 500 |
| 81072 | White | 500' | | | | | | 80018 | Yellow | 500 |
| | Yellow | 500' | | | | | | | | |

| Gauge: 20 AWG | | | | | | |
|---------------|---|--|--|--|--|--|
| Black | 100' | | | | | |
| Blue | 100' | | | | | |
| Brown | 100' | | | | | |
| Green | 100' | | | | | |
| Red | 100' | | | | | |
| White | 100' | | | | | |
| Yellow | 100' | | | | | |
| | Black Blue Brown Green Red White | | | | | |

| Gauge: 22 AWG | | | | | |
|---------------|--------|------|--|--|--|
| 81121 | Black | 100' | | | |
| 81122 | Blue | 100' | | | |
| 81123 | Brown | 100' | | | |
| 81124 | Green | 100' | | | |
| 81125 | Red | 100' | | | |
| 81126 | White | 100' | | | |
| 81127 | Yellow | 100' | | | |

MARKETING

SPLIT LOOM TUBING

- Provides Excellent Protection to Cover Wire, Cables, Hoses and More!
- Gives Excellent Resistance to Gasoline, Oil and Other Corrosive Substances
- Made of Durable Polyethylene
- Operating Temperature 40°F to 200°F



| Part # | Length | Description |
|--------|--------|--------------------|
| 27021 | 100' | 1/4" Bulk Coil |
| 27025 | 500' | 1/4" Dispenser Box |
| 27030 | 6' | 3/8" Retail Pack |
| 27032 | 50' | 3/8" Bulk Coil |
| 27031 | 100' | 3/8" Bulk Coil |
| 27033 | 300' | 3/8" Dispenser Box |
| 27050 | 4' | 1/2" Retail Pack |
| 27053 | 50' | 1/2" Bulk Coil |
| 27051 | 100' | 1/2" Bulk Coil |
| 27052 | 200' | 1/2" Dispenser Box |
| 27061 | 100' | 5/8" Bulk Coil |
| 27065 | 150' | 5/8" Dispenser Box |
| 27070 | 3' | 3/4" Retail Pack |
| 27071 | 100' | 3/4" Bulk Coil |
| 27075 | 100' | 3/4" Dispenser Box |
| 27100 | 100' | 1" Bulk Coil |
| 27110 | 100' | 1" Dispenser Box |
| | | |





Dispenser Box

#27030

YOUR COMPLETE SOLAR, SMART CHARGER & 12 VOLT BATTERY SOLUTIONS DISPLAY

• 24 Popular Items, 47 Total Pieces

#23050



*Display Gondola Not Included

MARKETING

BATTERY DISCONNECT DISPLAY 4-PRONG RACK WITH "DEMO BATTERY"

Self-service display PROMOTES SALES by offering your customers a hands-on product demonstration.

Display Rack Includes:

- One Top Mount Battery Disconnect Switch (#20138)
- "Demo Battery"
- 4-Color Header Card
- Wire Rack: 11" W x 23" H x 8"

Easy To Assemble:

- Holds Up to 8 Battery Disconnect Switches
- Free Standing for Shelf or Counter
- Built-In Hooks Allow for Pegboard or Gondola Mounting



#20263

TRAILER PLUG COVER COUNTER DISPLAY

• 20 Trailer Plugs per Gallon Container



12 VOLT CIRCUIT PROTECTION DISPLAY

- 62 Items, 124 Total Pieces
- Fuses, Fuse Holders, and Circuit Breakers
- Display Rack Not Included



*Display Gondola Not Included

MARKETING

12 VOLT RV ELECTRICAL DISPLAY

- 124 Items, 248 Pieces Total
- Wide Variety of 12V Electrical Accessories
- Header Sign Included, Display Rack Not Included

#23080



*Display Gondola Not Included



*Display Gondola Not Included

12 VOLT FUSE & SWITCH SPECIALTY DISPLAY

- 91 Popular items, 179 Total pieces
 A Complete Planogram to Cover All the Needs for the Automotive Electrical Accessory Category

12 VOLT ACCESSORY POWER CONNECTOR SPECIALTY DISPLAY

- 23 Popular Items, 55 Total Pieces
- 141/2" W x 53" H x 4 1/2" D
- Free Standing Display, can be Mounted to Wall when Legs are Removed
- Gondola Mounting Hardware Included

#23020



12-VOLT OPERATING SWITCH/LIGHT DISPLAY BOX

- Full Working Display with 6 of the Most Popular Lighted Switches
- Can be Displayed on Slat Wall or Peg Board
- Designed to be Used with #23085 Display
- Promote Sales with Hands-On Product Demonstration

#20580



| Part # | Description | Qty |
|--------|--|-----|
| | Power Supply | 1 |
| 20500 | Red Illuminated Toggle Switch | 1 |
| 20521 | Blue LED Metal Toggle Switch | 1 |
| 20523 | Red LED Metal Toggle Switch | 1 |
| 20550 | Red Illuminated On/Off Rocker Switch | 1 |
| 20563 | Chrome Aircraft Style Toggle Cover | 1 |
| 20508 | Heavy Duty Metal Toggle Cover Switch | 1 |
| | | |

LED WRITING BOARD

- Light Up Your Message with Neon Effect
- Easy to Write, Erase and Rewrite Your Message Over and Over
- Adjustable Modes (Color and Look)
- Durable, Portable and Energy Efficient
- How to Use: Write your message with included white fluorescent marker pen (1 included). Erase your message or drawing with included cloth. Use controller button to select color effect (red, blue, green), flash and speed.
- Dimensions: 15 ³/₄" x 11 ³/₄"
- Requires 110V Power
- Horizontal and Vertical Hanging Tabs Built In!





#23062 Adjustable Stand (Sold Separately)

DRUM FUNNELS

4-QUART DRUM FUNNEL

• Polypropylene

• Top ID: 11 3/4"

- Thread: 2"
 - Spout Length: 1 1/2"
- Spout OD: 2 1/2"

#32900 - With Screen

• Overall Height: 4 ³/₈"

#32910 - Without Screen





- Polypropylene
- Top ID: 11 3/4"
- Drainage Lid Fits Our 4-Quart Drum Funnels #32900 and #32910 or Standard Size 5-Gallon Pail
- Use to Drain Standard Quart Bottles



2-GALLON E-Z SMART DRUM FUNNEL

Smart Funnel Prevents Overfilling of Barrels

The Secret:

With the funnel extension, trapped air stops the liquid from filling to the top of the barrel. It leaves just enough room to add 2 gallons more to the barrel, which is the capacity of the E-Z SMART DRUM FUNNEL.

In order for the Smart Funnel to work properly, it must be removed immediately when fluid no longer flows freely.

This means the drum is full and cannot take any more fluid.

#32015

- Polypropylene Body and Lid with Attached Cord
- Polyethylene Air Hose and Band
- Overall Height: 13"



4-QUART POLYPROPYLENE DRUM FUNNEL WITH LID

- Removable Filter Screen Included
- Lockable Top Lid
- Threads PPS Fitting for 2" Bung Hole
- 1 1/2" Bottom ID Opening
- Overall Height: 8 "
- Spout Length: 1 3/4"
- Top ID 10"



#32425

3-QUART POLYETHYLENE DRUM FUNNEL

- Overall Height: 9 3/6"
- Top ID: 7 1/2"
- Spout Length: 1 1/6"
- Max Temp: 250° F



- Top OD with Cover: 11 1/2"
- Top ID: 11"

#32410 - 1" Thread

• Thread: 2"

POLYETHYLENE DRUM FUNNEL FOR OPEN OR CLOSED HEAD DRUMS

Direct hazardous materials into the drain of a drum with sloped channels designed to hold filters, bottles, funnels or other chemical containers. Fits 2" bung openings.

- Top ID: 21 1/2"
- Overall Height: 7"
- Spout ID: 1 1/2"
- Hole for Padlock
- Hinged Lid with Bolt and Nut Included
- #32420

61/2-QUART DRAIN BASIN

- Polypropylene
- Overall Length: 13 1/2"
- Top ID: 11 1/2"
- Height: 4 1/2"







4-GALLON OIL DRAIN PAN INCLUDES E-Z GRIP HANDLES - BLACK

- Heavy Duty Polyethylene
- Top ID: 17 3/4"
- Spout OD: 1"
- Overall Height: 5 1/2"
- Use Black for Oil





4-GALLON COOLANT DRAIN PAN INCLUDES E-Z GRIP HANDLES - GREEN

- Heavy Duty Polyethylene
- Top ID: 17 3/4"
- Spout OD: 1"
- Overall Height: 5 1/2"
- Use Green for Coolant

Wall Mounted Application



#32955



Free Standing Application

INTERESTED IN RECYCLING OIL OR OTHER FLUIDS? COLLECT EVERY LAST DROP!

B.O.B.

"Bottom of the Bottle" oil bottle draining system

- Polypropylene
- 100% Post Industrial
- Save Money by using Every Last Drop of Oil
- Help the Environment by Keeping Motor Oil out of Landfills
- Free Standing or Mounts to Wall
- Black Color Only
- Fits (5) Standard Size Quart Bottles Only (Not Included)

#32947

NON-SPARKING ALUMINUM DRUM WRENCH

- Easy to use Wrench for Opening Most 2" and 3/4" Drum Plugs
- Aluminum Die Cast Construction, Hardened and Tempered for Increased Strength







HEAVY DUTY GRADUATED MEASURING CONTAINERS

Heavy Duty Polypropylene Measuring Containers are Chemically Resistant, Spark-Proof, Dent-Proof, Rust-Proof and Boil-Proof (Up To 212° F)

• Molded Raised Letter Graduations in US, Metric #94046 and Imperial 155 oz. Part # Capacity Diameter Height • Translucent Material Keeps Contents Visible 180 87 oz. 94020 6" 8" • Big Grip Handle and Sturdy Non-Tip Base Swivel (2.5L) • Ideal for Mixing Chemicals, Oil, Gas and Powders Spout Similar to #94020 Except with 94026 Black 4" Spout 155oz. 94040 6.5" 15" **Heavy Duty Filler Extension** Works with (4.5L) #32167-7 #94026 Similar to #94040 Except with #94026 94046 #94020 & #94046 Black 4" Spout 87 oz. Pg. 59 87 07

INDUSTRIAL FLEX SPOUT MEASURERS

- Raised Measurements Molded on Side: Quarts and Liters
- Manufactured of Heavy Duty Polyethylene
- Removable Spout
- Flex Spouts All Have ID 3/8" and OD of 1/2"

| Part # | Capacity | Diameter | Height | Spout Length |
|--------|-----------|----------|---------|--------------|
| 94200 | 1/2 Quart | 3" | 4" | 11" |
| 94210 | 1 Quart | 3 1/2" | 5 1/2" | 11" |
| 94220 | 2 Quart | 4 1/4" | 6 3/4" | 13" |
| 94230 | 3 Quart | 5" | 9 1/2" | 13" |
| 94240 | 5 Quart | 6 3/4" | 11 3/4" | 13" |

GENERAL PURPOSE GRADUATED MEASURING CONTAINERS

Chemically Resistant Polypropylene Measurers

| Part # | Capacity | Diameter | Height |
|--------|-------------|----------|---------|
| 94100 | 3.4 Fl. oz. | 2 1/8" | 2 3/4" |
| 94110 | 8.4 Fl. oz. | 2 5/8" | 4 3/4" |
| 94120 | 17 Fl. oz. | 3 1/2" | 5 3/8" |
| 94130 | 1 Quart | 4 5/8" | 6 3/4" |
| 94140 | 2 Quart | 5 1/2" | 8 1/2" |
| 94150 | 3 Quart | 6 1/2" | 9 1/2" |
| 94160 | 5 Quart | 8 1/8" | 10 5/8" |





3 Qt.

5 Qt.

#94040

#94200 #94210 #94220 #94230 #94240 2 Qt.

1/2 Qt.

1 Qt.

155 oz.

180° Swivel Spout

#94110 - #94160

TRANSLUCENT HIGH DENSITY GRADUATED MEASURING CONTAINERS

- Polyethylene Heavy Duty Construction
- Raised Quart and Liter Measurements
- Large Extended Screw-On Flexible Spout with Cap for Easy Pouring
- Screw Cap Keeps Debris Out

| Part # | Capacity | Diameter | Height | Spout Length |
|--------|----------|----------|---------|--------------|
| 94360 | 1 Quart | 4 1/2" | 6 3/4" | 8" |
| 94363 | 2 Quart | 5" | 8/34" | 8 1/4" |
| 94365 | 3 Quart | 6" | 10" | 8 1/4" |
| 94367 | 5 Quart | 8" | 11 1/4" | 12" |







1-QUART E-Z MEASUREMENT FUNNEL

- Measurements on Both Sides to Allow Fluid to be Measured when Funnel is Upright or Inverted
- Translucent for Easy and Accurate Measuring
- Caps Eliminate Spills and Contaminants
- Removable Spout for Easy Measuring and Pouring!
- Clean Fluids Help Prevent Mechanical Damage
- Chemically Resistant Polyethylene
- Overall Length: 13 ³/₄"



17-QUART (4.25 GALLON) MONSTER FUNNEL

- Heavy Duty Polyethylene
- Overall Length: 14"
- Top ID: 13"

#32107

- Spout Length: 2 ½"
- Spout OD: 11/8"



#32017

HIGH DENSITY POLYETHYLENE PITCHER

 Longer Gradual Sloping Spout for Hard to Reach Areas
 Two Handles Makes
 #32377

- Pouring Easier
- Raised Quart and Liter Measurements
- Gas and Oil Compatible
- Pour Spout ID ½"

32377 8 Quart

#32375

4 Quart

Screw-On Cap



| Part # | Capacity | Diameter | Height | Spout Length |
|--------|----------|----------|--------|-----------------|
| 32375 | 4 Quart | 11 1/2" | 13" | 11 3/4" |
| 32377 | 8 Quart | 13" | 15" | 13 1/2" |
| | | | | |

THE PROP'R MEASURE "TIP & MEASURE" CONTAINER

Patented 2-in-1 measuring and storage container. 16-oz. storage capacity that accurately measures 1-6 ounces before pouring. Chemically resistant polyethylene.

- Translucent For Easy And
- Accurate Measuring
- Heavy Duty

4 1/8" Opening

Reusable FDA/USDA Approved







GALVANIZED MEASURE CAN WITH FLEX SPOUTS

BLACK MEASURING CONTAINER WITH FLEX SPOUT AND

- Heavy Duty Galvanized Steel with Hand Grip
- Splash-Resistant Tops
- Long-Reach Fixed-On Flexible Spouts with Tapered Ends

| Part # | Capacity | Height | Spout Length |
|--------|----------|--------|-----------------|
| 94484 | 1 Quart | 6" | 7 1/2" |
| 94486 | 2 Quart | 9" | 7 1/2" |
| 94488 | 4 Quart | 11" | 7 1/2" |







#94484

#94488

Clip for Storing Spout

THUMB-OPERATED VALVE in Upright Position • Heavy Duty Galvanized Steel with Hand Grip • Flexible Fixed-On Spouts with Tapered Spout Opening 1/2" and 14" Length • Thumb Operated Valve Controls Flow • Flip Action Valve Locks Valve Open **Thumb-Operated** Valve Part # Capacity 94494 4 Quart 94496 5 Quart 94498 8 Quart #94494 #94496 #94498 **GENERAL PURPOSE UTILITY FUNNELS** Galvanized Steel Includes Removable Filter 50 Grit Mesh Screen • Ribbed Spouts to Allow for Venting #94471 #94473 #94477 Spout Mesh Part # Capacity Height Top OD Spout ID Length Scree 94471 7 3/8" 6 3/8" 1/2" 1 Quart 3 1/8" "Non-Swirl" Design 94473 7 3/4" 8 3/8" 1/2" 3 1/8" 2 Quart **Promotes Rapid Flow** 94477 4 Quart 9 1/2" 12 3/8" 1" 3 3/4"

HEAVY DUTY GALVANIZED FUNNELS

- Heavy Duty Galvanized Steel
- Includes Removable Filter 50 Grit Mesh Screen

| Part # | Description | Capa | city | Height | Top OD | Spout ID |
|--------|--|----------|---------|---------|--------------|----------|
| 94463 | Galvanized Steel Funnel | 8 Qu | art | 11 7/8" | 9 5/8" | 1" |
| 94462 | Galvanized Steel "Body Rest" Funnel | 8 Qu | art | 11 7/8" | 9 5/8" | 1" |
| 94464 | Galvanized Steel "Lock-On" Funnel | 8 Qu | art | 11 7/8" | 9 5/8" | 1" |
| 94467 | Galvanized Steel Funnel | 12 Qı | lart | 12 1/8" | 11 3/8" | 1" |
| 94469 | Galvanized Steel "Body Rest" Funnel | 12 Qı | uart | 12 1/8" | 11 3/8" | 1" |
| | | | | | | |
| Part # | Description | Capa | city | Height | Top OD | Spout ID |
| 94474 | Galvanized Steel "Non-Swirl" Funnel | 9 Qı | uart | 12" | 12 1/2" | 1" |
| 94475 | Galvanized Steel "Non-Swirl" Funnel | 3 Qı | Jart | 9 1/4" | 8 1/2" | 1/2" |
| 94479 | Galvanized Steel "Non-Swirl" Funnel | 6 Qı | uart | 10 1/2" | 10 1/2" | 1" |
| | | | | | | |
| Part # | Description | Capacity | Height | Top OD | Spout Length | Spout ID |
| 94465 | Galvanized Steel Offset Funnel | 6 Quart | 11 5/8" | 10 1/2" | 3 3/4" | 1" |





#94463

#94469



#94479



#94465

DRIP PAN

- 17 1/2" x 25 3/4" x 1" Drip Pan
- Galvanized Steel
- Capacity: 6 Qt.



#94482

PUSH - STYLE GREASE GUNS

- These Compact Guns Get Grease into Tight Spaces
- The Piston-Style Construction Allows One-Handed Operation; Simply Hold the Barrel and Push Down to Dispense Grease (Not Included)
- #32990 Comes with Both Standard Hydraulic and Flush Style Couplers
- Plastic Barrel
- For Use with Grease Rated NLG12 and Lower

#32990 - OAL 8", 80 mL / 2 ½ oz.

#32985 - Red Cap, One Coupler, OAL 6 ½", 65 mL/2 oz.

12 QT WATER PAIL

- Prime 26 Gauge Galvanized Steel
- Features Unique Triple Locking "Gordon Seam" which forms a Six Layer Side Security Seam
- 6 Gauge Steel Handle
- 11 Gauge Top Rim
- Top ID 11.5"
- 10" H

#94490



13 QT UTILITY DRIP PAN

- Heady Duty Galvanized Steel
- Rugged Design
- 17 ¼" Diameter
- 3 ³/4" Height





HAND TRANSFER PUMP

- For Use With: Antifreeze, Detergents, Petroleum, Fuels, Oil, Water and Other Mild Chemicals
- Also Can Be Used as an Air Pump for Tires and Balls Using the Supplied Air Nozzle Attachments

#32467





ECONOMY OIL CHANGING KIT

The Funnel King $^{\odot}$ Oil Changing Kit includes everything you need to change the oil or fluids in any engine-powered vehicle, maintenance equipment, or outdoor power sports machine.

• Includes: one 6.5 Qt Drain Pan, one Offset Oil Funnel, two pairs of Nitrite Gloves, one 15" x 18" Sorbent Pad, and four Shop Towels



#32920

10 PACK FUNNEL ASSORTMENT

- Assortment of 10 of the Most Popular Funnels to Suit Almost Any Fluid Transfer and Fluid Management Application
- Includes One 2 QT Funnel, One 3-Pack Funnel Set, Two Clip-On Spouts, Two Flex Spouts, One 1 QT Flex Funnel, One 1 1/4 Qt. Double Capped Funnel
- Helps to Avoid Hazardous Spills
- Reduces the Potential for Fuel, Oil, and other Fluids from Contamination
- Perfect for any Garage or Shop
- Always have the Right Funnel for All Applications

#32850

SIPHON PUMP

- For Use With: Antifreeze, Detergents, Petroleum, Fuels, Oil, Water and Other Mild Chemicals
- Lightweight and Compact Design Makes it Easy to Stow Away in a Vehicle



#32469

DELUXE OIL CHANGING KIT

Perfect for vehicles with 6 Qt or larger reservoirs, the Funnel King[®] Deluxe Oil Changing Kit includes everything you need to change the oil or fluids in any engine-powered vehicle, maintenance equipment, or outdoor power sports machine.

 Includes one 4 Gallon Drain Pan, one 6 Qt Funnel (with microscreen to prevent contamination), one pair of Nitrite Gloves, one 15" x 18" Sorbent Pad, and eight Shop Towels







1-QUART POLYETHYLENE FUNNEL & FLEXIBLE SPOUT

- 1 Quart Economy Funnel with Screen
- Funnel Height: 6 ½"
- 10" Removable Flexible Spout
- Handle for Easy Pouring





See Page 61 for More Details on Spout #32187

#32825

A DD

POLYETHYLENE ECONOMY FUNNELS

• Includes Hand/Thumb Tab with Hang Hole for Storage

| Part # | Capacity | Color | Top ID | Spout ID | Height | Spout Length |
|--------|-----------|------------|--------------|-------------|-------------|-----------------|
| 32833 | 8 oz. | Yellow | 3 1/2" | 5/16" | 4 1/4" | 1 1/8" |
| 32831 | 1 Pint | Black | 5 1/8" | 1/2" | 4 1/2" | 1 1/2" |
| 32820 | 2 Quart | Black | 7" | 1/2" | 7" | 2 1/2" |
| 32835 | Combo Kit | t (Include | es all 3: 1/ | 2 Pint, 1 | Pint, and 2 | 2 Quart) |



1 PINT FUNNEL WITH 21" FLEXIBLE SPOUT

- Polypropylene Funnel
- Polyethylene Spout Tubing
- Hanging Tab/Thumb Tab
- 5" Top Opening
- 1/2" Bottom Spout ID Opening



18" LONG REACH POLYPROPYLENE FUNNEL: 1-QUART CAPACITY

- Hanging Tab
- 4" Top Opening
- 1/2" Bottom Spout ID Opening



#32832

MULTI-PURPOSE FUNNEL

The Funnel King[®] Oil Multi-Purpose Funnel is specifically designed to work on all cap-less gas tanks, like those found on newer Ford vehicles. The Multi-Purpose Funnel is also great for adding performance enhancing gasoline additives.

- Heavy Duty Polyethylene Construction
- Large Pour Spout Minimizes Drips
- 11" Long for Those Hard-to-Reach Areas
- Top ID: 3 ½"
- Spout OD: 13/16"
- Overall Height: 11"





POLYETHYLENE FUNNELS

• Includes Hand/Thumb Hold Tab with Hang Hole for Storage

| Red Part # | Capacity | Top ID | Spout OD | OA Height | Spout Length | Black Part # |
|------------|----------|-------------|-------------|----------------|-----------------|--------------|
| 32090 | 1-Pint | 4 1/2" | 1/2" | 6 1/8" | 2 1/4" | #32093 |
| 32091 | Simil | ar to #3209 | 90 Except v | vith 50 Micron | Screen | #32092 |
| 32001 | 2-Quart | 6 1/2" | 1 1/16" | 8 1/2" | 2 3/8" | #32004 |
| 32002 | Simil | ar to #3200 | 01 Except v | vith 60 Micron | Screen | #32003 |
| 32005 | 6-Quart | 8 1/4" | 1 5/16" | 10 1/2" | 1 5/8" | #32008 |
| 32006 | Simil | ar to #3200 | 05 Except v | vith 60 Micron | Screen | #32007 |



3-QUART GUZZLER SWIVEL SPOUT



OFFSET LOCKING OIL FUNNEL

- Fits All Standard Quart Containers
- Holds Oil Containers in Place While Pouring
- Chemically Resistant

Hanger Hole

- Overall Length: 5 ½"
- Spout Length: 1 ³/₄"
- Spout OD: 1 ¼"

#32847



DOUBLE CAPPED FUNNELS – "KEEPS THE DRIPS IN & THE DIRT OUT!"™ THE ULTIMATE "STORAGE" FUNNEL

- Caps Eliminate Spills and Contaminants
- Reduces Debris
- Clean Fluids Help Prevent Mechanical Damage
- Chemically Resistant Polyethylene





| Part # | Capacity | Color | Top ID | Spout OD | Height |
|--------|-------------|-----------|--------|----------|---------|
| 32105 | 1-Pint | Orange | 3" | 1/2" | 8 3/4" |
| 32115 | 1 1/4-Quart | Dark Blue | 4" | 3/4" | 10 1/2" |
| 32125 | 1 1/3-Quart | Black | 4" | 1 3/8" | 16 1/2" |
| 32130 | 1 1/2-Quart | Red | 4" | 1/2" | 17 1/4" |
| 32135 | 1 1/2-Quart | Yellow | 4" | 3/4" | 14 1/4" |
| 32140 | 1 1/2-Quart | Green | 4" | 1" | 13 1/2" |
| 32145 | 1 2/3-Quart | Dark Red | 4" | 1 3/8" | 14 1/4" |

HIGH DENSITY FAST FILL FUNNELS

Molded-In Screen to Keep Out Unwanted Debris.

- Clear Flexible Spout Makes Pouring More Accessible
- Molded-In Hand Grip for Easy Handling
- Large Spout Outlet Allows for Use with Powders



HEAVY DUTY POLYETHYLENE FUNNELS

WirthCo's lab and industrial funnels are sturdy and long lasting. Superior to ordinary funnels when quality and safety count.

- Chemically Resistant, Spark-Proof, Rust-Proof, **Dent-Proof and Boil-Proof** (Up to 212°)
- Translucent for Safer Accuracy
- Hanger Hole for Storage



Removable

Spout

| Part # | Capacity | Color | Top ID | Spout OD | OA Height | Spout Length |
|--------|--------------------|---------|--------|-------------|--------------|-----------------|
| 95020 | 2 oz. (57mL) | Natural | 2" | 1/4" | 2 1/2" | 1/2" |
| 95040 | 8 oz. (227 mL) | Natural | 4" | 1/2" | 4 1/4" | 1 1/8" |
| 95050 | 14 oz. (398 mL) | Natural | 5" | 5/8" | 5" | 1 3/8" |
| 95070 | 28 oz. (795 mL) | Natural | 7" | 5/8" | 7 1/2" | 2 3/8" |

#90090

#90092

144 oz.

EXTRA HEAVY DUTY POLYETHYLENE FUNNELS

- Manufactured of White Virgin and Black Regrind Polyethylene
- Chemically Resistant, Spark-Proof, Dent and Boil-Proof (Up to 212°)
- Ideal for Lab and Industry
- Translucent for Accuracy and Safety
- Anti-Splash Rings Available on Two Models



#90190

144 oz.

ACCESSORIES

16 OZ. POLYPROPYLENE AUTO STOP™ FUNNEL

- Two Magnets Automatically Stops the Flow when Fluid Rises
- Pour-Off Spout
- Filter Screen
- 5" Top Opening
- Spout ID: %16"
- Spout OD: 1"



POLYPROPYLENE FUNNELS

- Outer Ribbing Eliminates Air Lock
- Custom Colors Available on Special Order



| Specificatior | ns Top ID | Spout ID | OA Height | Spout Length |
|---------------|--------------|------------------|--------------|-----------------|
| 2 Fl. oz. | 2 3/8 | " 1/4" | 2 5/8" | 3/4" |
| 4 Fl. oz. | 3 1/8 | " 1/4" | 3" | 1" |
| 8 Fl. oz. | 3 3/4 | " 5/16" | 4 3/4" | 1 7/8" |
| | | | | |
| Color | Black | Clear | Green | White |
| 2 Fl. oz. | 32020 | 32021 | 32023 | 32022 |
| 4 Fl. oz. | 32040 | Special Order | 32041 | 32042 |
| 8 Fl. oz. | 32078 | Special Order | 32080 | 32085 |

FOLDING POLYETHYLENE FUNNELS

- Save Storage Space
- Chemically Resistant

32610

32700

32701

• Great for RV, Kitchen, Craft Projects or Anywhere Space is Limited

Model Capacity Color Top ID

12 oz.

16 oz.



| LONG LASTING | G HEAVY | DUTY | | | | |
|--------------|---------|------|--|--|--|--|
| 5000DC | | | | | | |
| SCOOPS | | | | | | |

White 4 1/16"

Black 6 1/4"

#93110 52 oz.

1"

Heavy Duty Polypropylene Scoops are Chemically Resistant, Spark-Proof and Rust-Proof

- Light Weight for Ease of Use
- Heavy Duty Secure Handles Do Not Conduct Heat



| п | | • | v |
|----|-----|---|---|
| 16 | oz. | | |

| Part # | Capacity | Color | OA Length | Dimensions |
|--------|--------------------|------------------------|-----------|--------------------------------|
| 93105 | 16 oz. (454 mL) | White | 10" | 6 1/2" L x 3 1/2" W x 2 1/2" H |
| 93110 | 52 oz. (15 L) | Natural Translucent | 12" | 7" L x 5 1/2" W x 3 1/4" H |

Spout

OD

1/2"

1"

OA

Height

4 1/2"

7"

4 PACK POLYETHYLENE ECONOMY FUNNEL SET



| Capacity | Color | Height | Top ID | Spout Length | Spout OD |
|-------------|--------|--------|-----------|-----------------|-------------|
| 3/4 Fl. oz. | Orange | 3 1/8" | 1 7/8" | 1 5/8" | 5/16" |
| 2 Fl. oz. | Orange | 4 1/2" | 2 3/4" | 2 1/4" | 3/8" |
| 6 Fl. oz. | Orange | 5 3/4" | 3 5/8" | 2 5/8" | 1/2" |
| 10 Fl. oz. | Orange | 6 1/4" | 4 3/8" | 3" | 9/16" |

ACCESSORIES E-Z FLOW™ SPOUT AND E-Z FLOW[™] POUR SPOUT **ADAPTER COMBO** Screws Onto Quart and Gallon Size Containers • Includes Cap — Eliminates Unwanted Dripping #32179 • Chemically Resistant • Overall Length: 15 %" -Z FLOW™ • Spout OD: 1" SPOUT • Fits Standard Gallon 38mm Thread #32177-7 and 28mm Quart Thread • Spout Length: 13 1/4" **SPOUT ADAPTER WITH GASKET** • Fits 2.5 Gallon, 63.5mm Threads #32178-7 #32177-7 8 OZ. POLYETHYLENE FUNNEL WITH FLEX-O-SPOUT[™] FLEXIBLE POLYETHYLENE FIXED FUNNEL ADAPTER **POUR SPOUT** Stabilizes Funnel for Safe Filling Applications • Fits Most Gallon and Quart Containers • Vent Structure Eliminates Air-Lock • 7" Spout Extends to 10.5" • Top ID: 4" • Bends to Any Angle • Spout OD: 3/4", Fits Quart Bottles • Long Narrow Spout is Ideal for • Spout OD: 1 1/8 ", Fits Gallon Bottles All Hard-to-Reach Areas • Height: 4"

#32187



#95855 - 8 oz. Funnel with Adapter

CLIP-ON SPOUT FOR QUART & GALLON CONTAINERS



Two sizes available, 2-in-1 or Gallon Size Only. Convenient to use; helps protect against spills and drips into engine compartment or work area. One side clips onto neck of plastic aallon container, other side clips onto neck of plastic quart container. Chemically resistant co-polymer polypropylene 2" L x 2" W, spout OD 7/8". Assorted colors.

#32257-7 - 2-in-1, Unpackaged #32259-7 - Gallon Size Only Unpackaged #32296 - 2-in-1, Clip Strip of 12 Units of #32251



#32251 - Clip Strip Packaging



#32255 - This Hang Hole Carded Package utilizes existing shelf/inventory space and requires no additional shelf space to display!

FLEXIBLE SPOUT FUNNEL – INCLUDES CAP

• Fits Gallon, Quart and Most Pint Containers



- Handles a Variety of Applications Including: Automotive/ RV, Household, Lawn/Garden, Marine, Farm, Industrial and More
- Great for Chainsaws!
- Manufactured of Assorted Colors Thermoplastic Elastomer
- Temperature Rating: -57 Degrees 250 Degrees F
- Spout OD: ½", 4" Long Spout
- #32157 Individual SKU #32197 - 12 Units On A Clip Strip With Header Card (Custom Headers Available)



РР



Recycle and Reuse! Convert fluid containers into your own custom funnels.



Air-Tight "Closure Cap" Included!

ACCESSORIES

MULTI-USE MAT BOOT TRAY

- Heavy Duty Polypropylene
- Unlimited Use in the Home, RV, Garage, Car, Trunk and Boat
- Protects Marine Craft and Trunks Against Gas/Oil Can Spills
- 25" L x 15" W x ³/₄" D



#40098



DRIP TRAY

- Made of Durable Polypropylene
- Resistant to Chemicals
- Excellent for Containing Spills and Drips from Machinery, Vehicles and Drums
- 22" W X 22" L X 1 ½" D
- 2 Gallon Capacity



#40092

POLYPROPYLENE PLASTIC SQUEEGEE

- 8" Head with Scrub Material and Rubber Squeegee
- 18" Handle



Supports 2 lbs

MACHINIST'S THIRD HAND

- Flexible 18" Nickel Plated Arm that Stays in Place When You Bend it
- Powerful Magnetic Base for Secure Mounting (Magnet Diameter: 3 3/8")
- Rubber Tipped Steel Clamp Opens To 2"

#10105

62

BOOT TRAY

- Durable Polypropylene
- Economical
- 23" L x 15" W x ½" D



#40100

CHRISTMAS TREE & PLANTER TRAY

- Made of Durable Polypropylene
- Stabilizes Tree on Carpet
- Decorative Primary Green Color
- Protects Floors from Spills and Scratches
- 22" W x 22" L x 1 ½" D



#40096

THIRD HAND

Our "Third Hand" products provide an extra hand when and where it is needed, and allows easy positioning of blueprints, instructions, work lights, parts for assembly or welding and more.

- Flexible 18" Nickel Plated Arm that Stays in Place When You Bend it
- Rubber Tipped Steel Clamps Open to 2"



#10100

ISHY FISHY® SOAP DOPE CLEANSER

- All-Purpose Biodegradable Cleaning Agent
- Excellent for Fiberglass and Stainless Steel
- Cleans Everything from "Hands To Hulls"!
- Environmentally Safe
- Formulated with Pumice

A satisfied customer writes... "We have a fishing boat that we clean with your product because it takes out the fuel and fish odors..."

#16010 – 4 oz. Squeeze Tube



THE TRUE & ONLY "LOCKING" RV BUMPER PLUG #30000

Won't Fall Out!

- Securely Holds Sewer Hoses in Place
- Fits Standard 4" Bumper
- Push in Center to Lock
- No Drilling or Welding
- No Hinges
- Weather and UV Resistant
- Made of Thermoplastic Rubber

#30082 (Non-locking) (Locking)

| Part# | Description | Size | Material | Color |
|---------|--------------------------|------|----------|-------|
| 30000 | RV "Locking" Bumper Plug | 4" | Rubber | Black |
| 30080 | RV "Locking" Bumper Plug | 4" | Rubber | White |
| 30081-7 | RV Bumper Plug | 4" | Plastic | Black |
| 30082-7 | RV Bumper Plug | 4" | Plastic | White |

EXTRA HEAVY DUTY POLYPROPYLENE SHOVELS

Like a hand held snow plow!

- Push Blade
- Non-Sparking Wood Handle with "D" Grip
- Curved Blade: 20" W x 12" H
- Overall Length: 49"



D-GRIPS

- #12121 1 1/8" inside diameter
- #12123 1" inside diameter
- #12125 1 ¹/₄" inside diameter



SAFETY SHIELD

- Sturdy Polycarbonate with Metal Sleeve
- Flexible 18" Nickle-Plated Arm that Stays in Place when Bent
- Powerful Magnetic Base for Secure Mounting (Magnet Diameter: 3 3/6")



"BUMPIT™ BUMPERS"

Hollow-Back Thermoplastic Rubber Bumpers

- Prevent Damage to Docks, Industrial Equipment and Vehicles
- Impervious to Extreme Weather, Fresh/Salt Water and Atmospheric Deterioration
- Counterbore Hole Diameter: 3⁄4"
- Temperature Range: -20° to +200° Fahrenheit
- Manufactured of Resilient, High Quality Thermoplastic Rubber more Flexible than Solid Rubber
- 70 Durometal Hardness



 2 1/2"
 1 1/2"
 2 3 1/2"

 Specifications
 Black Part #
 Part #

 Straight: 4 1/4" x 2 5/8" x 1 1/2"
 77776

 Straight: 12 1/4" x 2 5/8" x 1 1/2"
 77787
 77777

 Corner: 15" x 2 5/8" x 1 1/2"
 77788
 77797

KANGAROO™ TUFFSACK

Strong tear-resistant, UV-Treated vinyl bag with zipper closure holds up to 50 lbs. Slits cut on each end for easy carrying. Full width opening allows easy filling and emptying.

• 30" x 16"

#50500

It's splash resistant!



