

## HEADGEAR

### HELMET MOUNTED

### HELMET KITS



### LOW PROFILE



## HANDHELD

### USB




## SCENE LIGHTS

### ANGLE


### LANTERN

### AREA

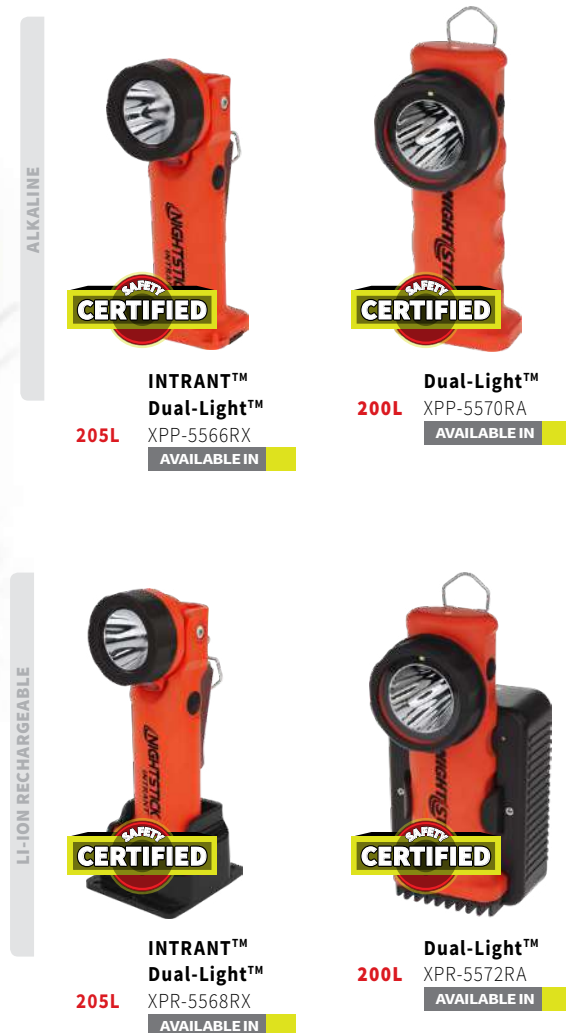

### SAFETY - FLASHLIGHT

### TRAFFIC WAND

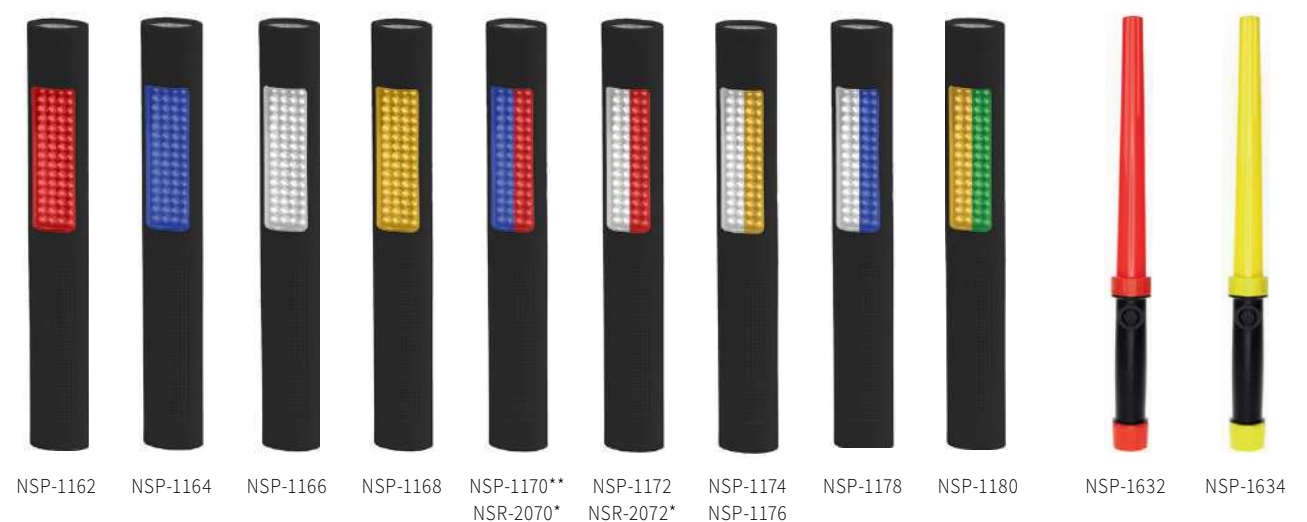

150L

\*Rechargeable. \*\*Models NSP-1170 and NSR-2070 blue & red strobe lights are only sold to authorized public safety personnel.







Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.

## HEADLAMPS



INDUSTRIAL GRADE FOAM ADHESIVE

SLIP-RESISTANT CLIP

ELIMINATES STRAPS AND BANDS

BANDS

ZERO-BAND



**90L**  
Multi-Function  
◀ XPP-5450G  
XPP-5450GC ▶  
(mount only)



**180L**  
◀ XPP-5452G  
XPP-5452GC ▶  
(mount only)



**160L**  
Multi-Function  
Dual-Light™  
◀ XPP-5454G  
XPP-5454GC ▶  
(mount only)



**175L**  
Multi-Function  
Dual-Light™  
◀ XPP-5456G  
(red floodlight)



**190L**  
◀ XPP-5458G  
(green floodlight)



**200L**  
Multi-Function  
Dual-Light™  
Low-Profile  
◀ XPP-5460GX  
XPP-5460GCX ▶  
(mount only)



**310L**  
DICATA™  
Multi-Function  
Dual-Light™  
Low-Profile  
◀ XPP-5462GX



**250L**  
FORTEM™  
Multi-Function  
Dual-Light™  
XPP-5466G  
AVAILABLE IN



**180L**  
Multi-Function  
Dual-Light™  
XPR-5560G  
(broad beam)



**140L**  
Multi-Function  
Dual-Light™  
XPR-5561G  
(focused beam)



## SAFETY CERTIFIED

- ✓ DUSTPROOF/WATERPROOF
- ✓ IMPACT & CHEMICAL RESISTANT
- ✓ CLASS I, DIVISION 1, GROUPS A-D, T3/T4, ZONE 0

	UL LISTED	ETL	Ex	IECEx	MSHA	INMETRO	NFPA	CE
<b>HEADLAMPS</b>								
XPP-5450G								
XPP-5450GC								
XPP-5452G								
XPP-5452GC								
XPP-5454G								
XPP-5454GC								
XPP-5456G								
XPP-5458G								
XPP-5460GX								
XPP-5460GCX								
XPP-5462GX								
XPP-5466G								
XPR-5560G								
XPR-5561G								
<b>AREA LIGHTS</b>								
XPP-5566GX								
XPR-5568GX								
XPP-5570GA								
XPR-5572GA								
XPR-5580G								
<b>HANDLEDS</b>								
XPP-5410G								
XPP-5412G								
XPP-5414GX								
XPP-5414GX-K01								
XPP-5418GX								
XPP-5418GX-K01								
XPP-5420G								
XPP-5420GX								
XPP-5422G								
XPP-5422GM								
XPP-5422GMX								
XPR-5522GM								
XPR-5542GMX								

## AREA LIGHTS

### ANGLE LIGHTS



**205L**  
INTRANT™  
Multi-Function  
Dual-Light™  
◀ XPP-5566GX  
XPR-5568GX ▶  
AVAILABLE IN



**200L**  
Multi-Function  
Dual-Light™  
◀ XPP-5570GA  
XPR-5572GA ▶  
AVAILABLE IN



**300L**  
VIRIBUS™  
Multi-Function  
Dual-Light™  
◀ XPR-5580G  
AVAILABLE IN

### LANTERN



## HANDLEDS



EASY-TO-USE ERGONOMIC SWITCHES BY DESIGN

HEAVY-DUTY CLIP

MULTIPLE MAGNETS FOR HANDS-FREE USE



**Penlights**  
30L ◀ XPP-5410G  
50L ◀ XPP-5412G



**120L**  
Multi-Function  
Dual-Light™  
◀ XPP-5414GX  
XPP-5414GX-K01  
(mount kit)



**200L**  
XPP-5418GX ▶  
XPP-5418GX-K01 ▶  
(mount kit)



**140L**  
◀ XPP-5420G  
AVAILABLE IN  
**210L**  
XPP-5420GX ▶



**240L**  
Dual-Light™  
◀ XPP-5422G  
AVAILABLE IN  
◀ XPP-5422GM  
(with magnets)



**285L**  
Dual-Light™  
XPP-5422GX ▶  
XPP-5422GMX ▶  
(with magnets)



**240L**  
Multi-Function  
Dual-Light™  
◀ XPR-5522GM  
(with magnets)  
**400L**  
XPR-5542GMX ▶  
(with tail magnet)



## SAFETY FIRST

### THE SCREW

This locking screw is required to ensure the ultimate user safety by deterring intentional or accidental battery exposure in a hazardous environment

### THE MATERIAL

Glass nylon polymer material withstands extreme conditions

### THE LENS

The polycarbonate lens is specifically designed and sealed to withstand virtually any environment

### THE MAGNET

Limitless hands-free use in any critical situation

### THE DUAL-LIGHT™

Lights up the immediate walking area along with a distance beam for maximum safety

## THE CERTIFICATION MARK

Permissible Nightstick Flashlight/Floodlight	
1 MSHA APPROVAL No. 20-A130001-0	6 CE Mark
2 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	7 INMETRO Certification
3 Intertek CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga	8 IECEx Certification
4 Ex ia I Ma Ex ia IIC T3 Ga	9 ATEX/IECEx Certification
5 Conforms to: ANSII/UL STD 913, ANSII/UL 60079-0, ANSII/UL 60079-11, ANSIIISA 60079-26	10 Tested Temperature Range
Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25	







Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.

## WEAPON MOUNTED LIGHTS



**350L** TWM-350  
**850L** TWM-850XL



**Strobe**  
**350L** TWM-350S  
**850L** TWM-850XLS



PICATINNY RAIL MOUNT

FITS EXISTING HOLSTERS

INDEPENDENT DUAL SWITCH DESIGN



**180L** TAC-300B-K01



**800L** TAC-460XL-K01



**150L** TAC-302B-K01 (Green LED)

## TACTICAL LIGHTS

### MINI-TAC



**35L** MT-90



**140L** MT-120



**100L** MT-100



**365NM** MTU-106 (UV emissions)



**90L** MT-110

### MINI-TAC PRO



**100L** MT-200



**120L** MT-210



**200L** MT-220

MULTI-FUNCTIONAL

### ADJUSTABLE BEAM



**115L** NSP-410



**275L** NSP-420



**275L** NSP-430

### USB



**320L** USB-320



**900L** USB-558XL

LI-ION RECHARGEABLE



**Dual-Light™**  
**850L** NSR-9854XL

### TACTICAL



**Polymer**  
**180L** TAC-300B  
**150L** TAC-302B (Green LED)  
**500L** TAC-310XL



**Metal**  
**180L** TAC-350B  
**500L** TAC-360XL



**Polymer**  
**200L** TAC-400B  
**800L** TAC-410XL



**Metal**  
**200L** TAC-450B  
**800L** TAC-460XL



**Metal, Dual-Light™**  
**650L** NSP-9842XL



**Polymer**  
**200L** TAC-500B  
**800L** TAC-510XL



**Metal**  
**800L** TAC-540XL



**Metal**  
**200L** TAC-550B  
**800L** TAC-560XL



**Metal, Dual-Light™**  
**650L** NSR-9844XL

LI-ION RECHARGEABLE | MULTI-FUNCTIONAL

### DUTY - PERSONAL SIZE



**Polymer**  
**650L** NSR-9514XL



**Metal**  
**650L** NSR-9614XL

LI-ION RECHARGEABLE



**Polymer, Dual-Light™**  
**650L** NSR-9924XL



**Metal, Dual-Light™**  
**650L** NSR-9944XL



**Metal, Dual-Light™**  
**650L** NSR-9744XL

LI-ION RECHARGEABLE



**Metal**  
**650L** NSR-9746XL

CREE TrueWhite® TECHNOLOGY FOR THE CLEAREST BEAM



## SCENE LIGHTS

### AREA



**1000L** NSR-1514




**1000L** NSR-1514C

LI-ION RECHARGEABLE

360° ROTATING PIVOT

HEAVY-DUTY RARE EARTH MAGNET

### SAFETY - FLASHLIGHT

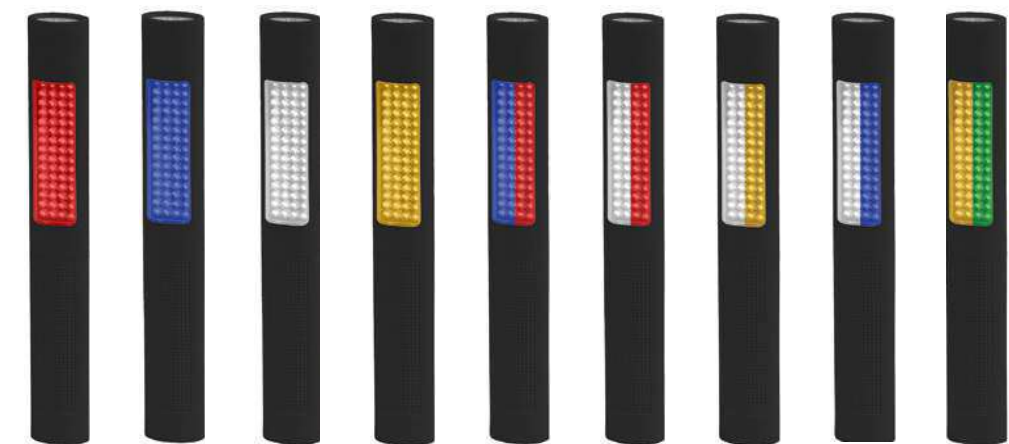

NSP-1162 NSP-1164 NSP-1166 NSP-1168 NSP-1170\*\* NSR-2070\* NSP-1172 NSR-2072\* NSP-1174 NSP-1176 NSR-1178 NSP-1180

**150L**

\*Rechargeable. \*\*Models NSP-1170 and NSR-2070 blue & red strobe lights are only sold to authorized public safety personnel.

### TRAFFIC WAND



NSP-1632 NSP-1634









**Tactical**

**TAC 300 Series Waterproof**  
180L FDL-300R  
150L TAC-302B Green LED  
500L TAC-310XL  
180L TAC-350B  
500L TAC-360XL

**TAC 400 Series Rechargeable / Waterproof**  
180L TAC-300B  
Also available in:   
200L TAC-450B  
800L TAC-410XL  
800L TAC-460XL

**TAC 500 Series Rechargeable / Waterproof / Multi-Function**  
200L TAC-400B  
Also available in:   
800L TAC-510XL  
800L TAC-540XL  
Rechargeable upgrade available  
200L TAC-550B  
800L TAC-560XL

**Adjustable Beam Metal**  
NSP-410 115L  
NSP-420 275L  
NSP-430 275L

Nightstick products are designed and manufactured by Bayco Products, Inc., is a global brand of professional lighting products including flashlights, headlamps and Intrinsically Safe lighting solutions that exceed the industry standards in performance, quality, user-safety and value. Since 1984, Bayco Products, Inc. has been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized worldwide as high-performance, high-quality, high-value lighting solutions across virtually every industry. Headquartered in North Texas, Bayco Products' 110,000sf facility is the international headquarters for R&D, engineering, marketing, sales and distribution.

**Long Gun Light Kits**

150L TAC-300B-K01  
150L TAC-302B-K01 Green LED  
800L TAC-460XL-K01

**Mini-TAC**

**Mini-TAC Series Metal**  
140L MT-130  
180L MT-140B  
35L MT-90  
100L MT-100  
100L MT-100BL  
100L MT-100R  
90L MT-110  
140L MT-120

**Mini-TAC Pro**

**Mini-TAC Pro Series Metal**  
200L MT-220  
100L MT-200  
120L MT-210  
3.6L MT-230

**Duty / Personal-Size**

**9000 Series Rechargeable / Waterproof / Multi-Function**  
650L NSR-9514XL  
350L NSR-9514Y  
650L NSR-9614XL  
650L NSR-9920XL  
650L NSR-9924XL  
650L NSR-9940XL  
650L NSR-9944XL

**Full-Size**

650L NSR-9744XL  
650L NSR-9746XL

**UV Lights**

**Mini-TAC UV Metal**  
365 Nanometers MTU-106  
365 Nanometers MTU-136

**Multi-Purpose**

**Multi-Function Polymer / Flashlight / Floodlight / Dual-Light**  
60L NSP-1400B  
60L NSP-1400R  
60L NSP-1400T  
600L NSR-2168B  
600L NSR-2168R  
130L NSP-2422B  
130L NSP-2422R  
250L NSR-2522RM (Rechargeable)  
150L NSP-1310RM  
150L NSP-1260  
200L NSR-2492  
1200L SLR-2120  
NSR-2124 Red and Blue Strobe (only sold to authorized public safety personnel)

**Headlamps**

**Spotlight / Floodlight / Dual-Light**  
NSP-4602B 35L  
NSP-4603B 120L  
NSP-4604B 80L  
NSP-4605B 150L  
NSP-4606B 150L  
NSP-4608B 180L  
NSP-4608BC 180L  
NSP-4610B 150L  
NSP-4612B 175L  
NSP-4614B 300L  
NSP-4616B 450L

**Tactical Dual-Light Flashlights**

**Rechargeable / Waterproof / Multi-Function**  
650L NSP-9842XL  
650L NSR-9844XL

**Rechargeable Scene / Area Lights**

**Rechargeable / Waterproof**  
1000L NSR-1514  
1000L NSR-1514C  
NSR-1514C

**Safety Lights**

**Flashlight / Floodlight / Strobe**  
150L NSP-1162  
NSP-1164  
NSP-1166  
NSP-1168  
NSP-1170  
NSP-1172  
NSP-1174  
NSP-1176  
NSP-1178  
NSP-1180  
NSR-2070  
NSR-2072

**Rechargeable Safety Lights**  
NSR-2070  
NSR-2072

**Traffic Wands**

**Constant-on / Strobe**  
NSP-1632  
NSP-1634  
NSP-1636



Mini-TAC													
Part Number	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
MT-90	35	1.5	29 m	214	Water Resistant	Aircraft-grade Aluminum	1 AAA	3.65 in (93 mm)	0.6 in (15 mm)	1.1 oz (34 g)	Limited Lifetime	CE	
MT-100	100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA	5.4 in (137 mm)	0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE	
MT-100BL	100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA	5.4 in (137 mm)	0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE	
MT-100R	100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA	5.4 in (137 mm)	0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE	
MT-110	90	1	48 m	584	Water Resistant	Aircraft-grade Aluminum	1 AA	3.9 in (99 mm)	0.9 in (23 mm)	1.5 oz (43 g)	Limited Lifetime	CE	
MT-120	140	1.5	68 m	1,173	Water Resistant	Aircraft-grade Aluminum	2 AA	5.6 in (142 mm)	0.9 in (23 mm)	2.3 oz (65 g)	Limited Lifetime	CE	
MT-130	140	1.5	68 m	1,173	Water Resistant	Aircraft-grade Aluminum	2 AA	5.6 in (142 mm) - Overall 15.8 in (396 mm)	0.9 in (23 mm)	5.2 oz (147 g)	Limited Lifetime	CE	
MT-140B	180	2.5	99 m	2,433	Water Resistant	Aircraft-grade Aluminum	2 AA	5.6 in (142 mm) - Overall 22.6 in (571.5 mm)	0.9 in (23 mm)	7.7 oz (219 g)	Limited Lifetime	CE	

Mini-TAC Pro														
Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
MT-200	Yes	100/60/30	1.5/3/4.5	51/36/29 m	667/334/204	Waterproof	Aircraft-grade Aluminum	2 AAA	5.5 in (140 mm)	0.7 in (18 mm)	0.6 in (15 mm)	1.9 oz (54 g)	Limited Lifetime	CE
MT-210	Yes	120/55/30	1.5/4/6	70/51/40 m	1,227/656/398	Waterproof	Aircraft-grade Aluminum	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
MT-220	Yes	200/90/45	1.5/4/6	100/73/56 m	2,486/1,335/797	Waterproof	Aircraft-grade Aluminum	2 AA	6 in (152 mm)	0.9 in (23 mm)	0.6 in (15 mm)	3.2 oz (91 g)	Limited Lifetime	CE
MT-230	Yes	3.6/10/60	36/14/2	4/46/66 m	41,538/1,076	Waterproof	Aircraft-grade Aluminum	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE

Mini-TAC UV														
Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
MTU-106		365 Nanometers	0.75			Water Resistant	Aircraft-grade Aluminum	2 AAA	5.4 in (137 mm)	0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE	
MTU-136		365 Nanometers	1.25			Water Resistant	Aircraft-grade Aluminum	2 AA	5.6 in (142 mm) - Overall 15.8 in (396 mm)	0.9 in (23 mm)	0.6 in (15 mm)	5.2 oz (147 g)	Limited Lifetime	CE

Tactical															
Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
FDL-300R			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-300B			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.6 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-300T			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-300Y			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-302B			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-310XL	Yes		500	1.5	150 m	5,597	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.4 oz (124 g)	Limited Lifetime	CE
TAC-350B			180	3	190 m	9,150	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	5.7 oz (162 g)	Limited Lifetime	CE
TAC-360XL	Yes		500	1.5	150 m	5,597	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26 mm)	5.7 oz (162 g)	Limited Lifetime	CE
TAC-400B			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.9 oz (140 g)	Limited Lifetime	CE
TAC-400Y			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.9 oz (140 g)	Limited Lifetime	CE
TAC-410XL	Yes		800	2	205 m	10,785	Waterproof	Rechargeable Lithium-ion	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	4.9 oz (140 g)	Limited Lifetime	CE
TAC-450B			200	3	210 m	12,000	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.3 oz (179 g)	Limited Lifetime	CE
TAC-460XL	Yes		800	2	205 m	10,785	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.3 oz (179 g)	Limited Lifetime	CE
TAC-500B	Yes	200/125/65	3/6/12	210/150/95 m	12,000/4,951/2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	5.1 oz (145 g)	Limited Lifetime	CE	
TAC-500T	Yes	200/125/65	3/6/12	210/150/95 m	12,000/4,951/2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	5.1 oz (145 g)	Limited Lifetime	CE	
TAC-500Y	Yes	200/125/65	3/6/12	210/150/95 m	12,000/4,951/2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	5.1 oz (145 g)	Limited Lifetime	CE	
TAC-510XL	Yes	Yes	800/350/140	2/3.75/8.75	205/157/99 m	10,785/4,951/2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.1 oz (173 g)	Limited Lifetime	CE
TAC-540XL	Yes	Yes	800/350/140	1.5/2/4.5	205/157/99 m	10,785/4,951/2,250	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.1 oz (173 g)	Limited Lifetime	CE
TAC-550B	Yes	200/125/65	3/6/12	210/150/95 m	12,000/4,951/2,250	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.1 oz (173 g)	Limited Lifetime	CE	
TAC-560XL	Yes	Yes	800/350/140	2/3.75/8.75	205/157/99 m	10,785/4,951/2,250	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.1 oz (173 g)	Limited Lifetime	CE

Long Gun Kits															
Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
TAC-300B-K01			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	6 in (152 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.1 oz (173 g)	Limited Lifetime	CE
TAC-302B-K01 Green LED			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium w/WRPS	6 in (152 mm)	1.25 in (32 mm)	1.035 in (26 mm)	6.3 oz (179 g)	Limited Lifetime	CE
TAC-400XL-K01	Yes		800	2	205 m	10,785	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium Upgradeable to rechargeable Lithium-ion	6.7 in (170 mm)	1.25 in (32 mm)	1.035 in (26 mm)	7.6 oz (215 g)	Limited Lifetime	CE

Area Lights													
Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Width	Height	Weight	Warranty	Certification
NSR-1514	Yes	Yes	1,000/500	4/8	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.1 in (155 mm)	3.5 in (89 mm)	12 in (305 mm)	52.8 oz (1,496 g)	1 Year Limited	CE
NSR-1514C	Yes	Yes	1,000/500	4/8	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	32 in (813 mm)	5 in (127 mm)	16 in (406 mm)	288 oz (8,129 g)	1 Year Limited	CE

Adjustable Beam														
Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
NSP-410		115	1	72 m	1,324	Waterproof	Aircraft-grade Aluminum	1 AAA	4.25 in (108 mm)	1 in (26 mm)	0.88 in (22 mm)	3.3 oz (94 g)	1 Year Limited	CE
NSP-420	Yes	275/15/45	2/5/24	133 m	4,445	Waterproof	Aircraft-grade Aluminum	3 AAA	4.5 in (114 mm)	1.3 in (33 mm)	1 in (25 mm)	4.6 oz (131 g)	1 Year Limited	CE
NSP-430		275	1.5	109 m	3,003	Waterproof	Aircraft-grade Aluminum	2 AA	5.9 in (147 mm)	1 in (26 mm)	0.88 in (22 mm)	4.8 oz (140 g)	1 Year Limited	CE

Duty/Personal-Size																
Part Number	Dual Light	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
NSR-9514XL	Yes	Yes	Yes	850/200/50	6.5/9/50	325/166/65 m	26,280/6,800/450	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	8.8 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
NSR-9514Y	Yes	Yes	Yes	350/200/50	4.25/8.5/32.5	313/125/118 m	24,100/12,075/6,200	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
NSR-9614XL	Yes	Yes	Yes	850/200/50	6.5/9/50	325/166/65 m	26,280/6,800/450	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	12.8 oz (363 g)	Limited Lifetime	CE
NSR-9920XL	Yes	Yes	Yes	650/300/150	4.25/9.5/18.5	304/212/115 m	23,142/11,302/6,028	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.9 oz (309 g)	Limited Lifetime	CE
NSR-9920YL	Yes	Yes	Yes	650/300/150	4.25/9.5/18.5	304/212/115 m	23,142/11,302/6,028	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	9.9 oz (281 g)	Limited Lifetime	CE
NSR-9940XL	Yes	Yes	Yes	650/300/150	4.25/9.5/18.5	304/212/115 m	23,142/11,302/6,028	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)	Limited Lifetime	CE
NSR-9940YL	Yes	Yes	Yes	650/300/150	4.25/9.5/18.5	304/212/115 m	23,142/11,302/6,028	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)	Limited Lifetime	CE

Full-Size																	
Part Number	Dual Light	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification	
NSR-9744XL	Yes	Yes	Yes	650/300/150	10.5/18/37	275/200/148 m	18,675/9,887/4,857	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	11.8 in (300 mm)	1.6 in (41 mm)	1.2 in (30 mm)	17.5 oz (496 g)	Limited Lifetime	CE	
NSR-9746XL	Yes	Yes	Yes	650/300/150	10.5/18/37	4/8/44	400/295/70 m	94,253/25,834/15,286	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	12.8 in (325 mm)	2.4 in (61 mm)	1.2 in (30 mm)	22.5 oz (638 g)	Limited Lifetime	CE

Traffic Wands													
Part Number	Multi-Function	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Diameter	Weight	Warranty	Certification			
NSP-1632	Yes	18/27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.5 mm)	1.975 in (50 mm)	5.3 oz (151 g)	1 Year Limited	CE			
NSP-1634	Yes	18/27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.5 mm)	1.49 in (38 mm)	5.3 oz (151 g)	1 Year Limited	CE			
NSP-1636	Yes	18/27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.5 mm)	1.49 in (38 mm)	5.3 oz (151 g)	1 Year Limited	CE			

Headlamps															
Part Number	Dual Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Width	Height	Depth	Weight	Warranty	Certification
NSP-4602B	Yes	Yes	30/15/35	15/36/5/12	19 m	92	Waterproof	Engineered Polymer	3 AAA	2.4 in (61 mm)	1.9 in (48 mm)	1.8 in (46 mm)	3.3 oz (94 g)	1 Year Limited	CE
NSP-4603B	Yes	Yes	120/70	5.5/1/4	144/100 m	5,234/2,498	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)	2 in (51 mm)	3.5 oz (100 g)	1 Year Limited	CE
NSP-4604B	Yes	Yes	100/45/90	7/8/8.5	93 m	2,169	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)				



## WEAPON MOUNTED LIGHTS



**350L** TWM-350  
**850L** TWM-850XL



**Strobe**  
**350L** TWM-350S  
**850L** TWM-850XLS



PICATINNY RAIL MOUNT

FITS EXISTING HOLSTERS

INDEPENDENT DUAL SWITCH DESIGN



**180L** TAC-300B-K01



**800L** TAC-460XL-K01



**150L** TAC-302B-K01 (Green LED)

## HEADLAMPS



IP-X7 WATERPROOF RATED

RED AND GREEN FLOOD LIGHTS

**Green/Red LED**  
**150L** NSP-4610B



**35L** Dual-Light™  
NSP-4602B



**180L** Dual-Light™  
NSP-4608B



**175L** Dual-Light™  
NSP-4612B



**300L** Dual-Light™  
NSP-4614B



**450L** Dual-Light™  
NSP-4616B



**1,000L** USB, Strobe  
USB-4708B

## AREA LIGHTS

### FLOOD



**1000L** NSR-1514



**1000L** NSR-1514C

## TACTICAL LIGHTS

### MINI-TAC



**35L** MT-90



**90L** MT-110



**100L** MT-100



**140L** MT-120

### MINI-TAC PRO



**100L** MT-200



**120L** MT-210



**200L** MT-220

### ADJUSTABLE BEAM



**115L** NSP-410



**275L** NSP-420



**275L** NSP-430

### USB



**320L** USB-320



**900L** USB-558XL



**850L** Dual-Light™  
NSR-9854XL

INTEGRATED USB CHARGER PORT

### TACTICAL



**Polymer**  
**180L** TAC-300B  
**180L** TAC-300T  
**150L** TAC-302B (Green LED)  
**500L** TAC-310XL



**Metal**  
**180L** TAC-350B  
**500L** TAC-360XL



**Polymer**  
**200L** TAC-400B  
**800L** TAC-410XL



**Metal**  
**200L** TAC-450B  
**800L** TAC-460XL



**Metal, Dual-Light™**  
**650L** NSP-9842XL



**Polymer**  
**200L** TAC-500B  
**800L** TAC-510XL



**Metal**  
**800L** TAC-540XL



**Metal**  
**200L** TAC-550B  
**800L** TAC-560XL



**Metal, Dual-Light™**  
**650L** NSP-9844XL

### DUTY - PERSONAL SIZE



**Polymer**  
**650L** NSR-9514XL



**Metal**  
**650L** NSR-9614XL



**Polymer, Dual-Light™**  
**650L** NSR-9924XL



**Metal, Dual-Light™**  
**650L** NSR-9944XL



**Metal, Dual-Light™**  
**650L** NSR-9744XL



**Metal**  
**650L** NSR-9746XL

UP TO A 275 METERS OF BEAM DISTANCE

DUAL-LIGHT™









**LED Lights**



**Fluorescent Lights**



**Halogen Lights**



**Incandescent Lights**



**Cord Reels**



**Extension Cords**





# The Bayco Line-up

LED Lights	Part Number	Floodlight Lumens	Type of Switch	Special Features	Case Material	Cord Gauge	Cord Jacket	Cord Color	Body Color	Cord Length	Body Length	Body Width	Body Depth	Weight	Certification	Warranty
	SL-2125	120	Single Body Rocker Switch - Floodlight	Two integrated magnets. Magnetic Hook included.	Engineered Polymer	18/2	SJT	Black	Yellow	25 ft. (7.62 m)	14.3 in (363 mm)	1.8 in (46 mm)	1.8 in (46 mm)	28.8 oz (816 g)	cETLus	1 Year Limited
	SL-864	120	Single Body Rocker Switch - Floodlight	Two integrated magnets. Magnetic Hook included.	Engineered Polymer/Steel	18/2	SVT	Black	Yellow	50 ft. (15.24 m)	10.4 in (264 mm)	9.5 in (241 mm)	3.3 in (84 mm)	7.7 lbs (3.5 kg)	ETLus	1 Year Limited
	SL-2135	1200	Single Sealed Push Button	Two integrated magnets. Magnetic Hook included.	Engineered Polymer	18/2	SJT	Black	Yellow	25 ft. (7.62 m)	16.75 in (425.5 mm)	2.1 in (53.3 mm)	2.1 in (53.3 mm)	30.5 oz (866 g)	cETLus	1 Year Limited
	SL-866	1200	Single Sealed Push Button	Two integrated magnets. Magnetic Hook included.	Engineered Polymer/Steel	18/2	SVT	Black	Yellow	50 ft. (15.24 m)	16.75 in (425.5 mm)	2.1 in (53.3 mm)	2.1 in (53.3 mm)	8 lbs (3.6 kg)	ETLus	1 Year Limited
	SL-868	950	Single Sealed Push Button	Cool to the touch single 10W LED. Magnetic base.	Aluminum	18/3	SJT	Black	Black/Yellow	40 ft. (12.19 m)	11.5 in (292 mm)	6.2 in (157 mm)	3.1 in (79 mm)	215 oz (1.39 kg)	ETLus	1 Year Limited
	SL-1504	950	Single Sealed Push Button	Cool to the touch single 10W LED. Magnetic base.	Aluminum	18/3	SVT	Black	Black/Red	12 ft. (3.66 m)	11.5 in (292 mm)	6.2 in (157 mm)	3.1 in (79 mm)	3.2 lbs (1.45 kg)	cETLus	1 Year Limited
	SL-1512	2,200	Single Sealed Push Button	Cool to the touch single 20W LED.	Aluminum	18/3	SVT	Black	Black/Red	6 ft. (1.83 m)	12.88 in (327 mm)	6.38 in (162 mm)	6.38 in (162 mm)	3.25 lbs (1.5 kg)	cETLus	1 Year Limited
	SL-1514	2,220	Single Sealed Push Button	Cool to the touch single 20W LED. Magnetic base.	Aluminum	18/3	SVT	Black	Black/Red	12 ft. (3.66 m)	11.5 in (292 mm)	6.2 in (157 mm)	3.1 in (79 mm)	3.2 lbs (1.45 kg)	cETLus	1 Year Limited
	SL-1522	4,000	Two Sealed Push Buttons	Cool to the touch dual 20W LEDs. 6 Tripod. Removable head.	Aluminum	18/3	SVT	Black	Black/Red	6 ft. (1.83 m)	72 in (183 cm)	17.38 in (441 mm)	7.38 in (187 mm)	12.7 lbs (5.8 kg)	cETLus	1 Year Limited
	SL-1530	10,000	Two Sealed Push Buttons	Cool to the touch dual 20W LEDs. 6 Tripod. Removable head.	Aluminum	18/3	SVT	Black	Black/Red	6 ft. (1.83 m)	82.5 in (210 cm)	18.4 in (467 mm)	7.38 in (187 mm)	13.1 lbs (5.9 kg)	cETLus	1 Year Limited

Fluorescent Lights	Part Number	Output Wattage	OSHA NRTL Compliant	Number of Outlets	Case Material	Cord Gauge	Cord Jacket	Cord Color	Body Color	Cord Length	Body Length	Body Width	Body Depth	Weight	Certification	Warranty
	SL-507	13 watts	No	0	Polypropylene	18/2	SJT/W	Black	Yellow	6 ft. (1.83 m)	12.4 in (315 mm)	3 in (76 mm)	2.8 in (71 mm)	20.8 oz (590 g)	cETLus	1 Year Limited
	SL-520	13 watts	No	0	Polypropylene	18/2	SJT	Black	Black	25 ft. (7.62 m)	12.4 in (315 mm)	3 in (76 mm)	2.8 in (71 mm)	2.3 lbs (1 kg)	cETLus	1 Year Limited
	SL-550	13 watts	No	0	Polypropylene	18/2	SJT	Black	Black	50 ft. (15.24 m)	12.4 in (315 mm)	3 in (76 mm)	2.8 in (71 mm)	3.4 lbs (1.5 kg)	cETLus	1 Year Limited
	SL-563	13 watts	No	0	Polypropylene	18/2	SJT	Black	Black	25 ft. (7.62 m)	15.9 in (404 mm)	2.3 in (58 mm)	3.3 in (79 mm)	2.3 lbs (1 kg)	cETLus	1 Year Limited
	SL-623	15 watts	No	0	Polypropylene	18/2	SJT	Black	Yellow	25 ft. (7.62 m)	24.8 in (630 mm)	2 in (51 mm)	2 in (51 mm)	2.6 lbs (1.2 kg)	cETLus	1 Year Limited
	SL-676	13 watts	Yes	0	Polypropylene	18/2	SJT	Black	Yellow	25 ft. (7.62 m)	9.3 in (236 mm)	2.4 in (61 mm)	2.4 in (61 mm)	2.5 lbs (1.1 kg)	cETLus	1 Year Limited
	SL-677	13 watts	Yes	0	Polypropylene	18/2	SJT	Black	Yellow	50 ft. (15.24 m)	9.4 in (239 mm)	2.5 in (62 mm)	2.5 in (62 mm)	3.7 lbs (1.7 kg)	cETLus	1 Year Limited
	SL-907	13 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Yellow	6 ft. (1.83 m)	13.3 in (338 mm)	2.9 in (74 mm)	2.8 in (71 mm)	18.4 oz (522 g)	cETLus	1 Year Limited
	SL-908	26 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Yellow	6 ft. (1.83 m)	14.4 in (366 mm)	4 in (102 mm)	3.4 in (86 mm)	24 oz (680 g)	cETLus	1 Year Limited
	SL-918	18 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Yellow	6 ft. (1.83 m)	14 in (356 mm)	3.1 in (79 mm)	3.3 in (84 mm)	24 oz (680 g)	cETLus	1 Year Limited
	SL-935	13 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Black	25 ft. (7.62 m)	13.1 in (333 mm)	3 in (76 mm)	2.8 in (71 mm)	2.8 lbs (1.3 kg)	cETLus	1 Year Limited
	SL-936	13 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Black	50 ft. (15.24 m)	13.3 in (338 mm)	3 in (76 mm)	2.8 in (71 mm)	4.8 lbs (2.2 kg)	cETLus	1 Year Limited
	SL-964	13 watts	No	1 (12 amps)	Polypropylene	16/3	SJT/W	Black	Yellow	25 ft. (7.62 m)	15.8 in (401 mm)	2.3 in (58 mm)	3.1 in (79 mm)	2.5 lbs (1.1 kg)	cETLus	1 Year Limited
	SL-975	26 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Black	25 ft. (7.62 m)	14 in (356 mm)	4 in (102 mm)	3.5 in (89 mm)	3 lbs (1.4 kg)	cETLus	1 Year Limited
	SL-976	26 watts	No	1 (12 amps)	Polypropylene	16/3	SJT	Black	Black	25 ft. (7.62 m)	14.4 in (366 mm)	3.3 in (84 mm)	3.1 in (79 mm)	2.8 lbs (1.3 kg)	cETLus	1 Year Limited
	SL-651	13 watts	No	0	Polypropylene / Polyethylene	18/2	SVT	Yellow	Yellow	20 ft. (6.1 m)	8.8 in (223 mm)	6.8 in (173 mm)	3.1 in (79 mm)	3.5 lbs (1.6 kg)	cETLus	1 Year Limited
	SL-821	13 watts	No	0	Polypropylene / Steel	16/3	SJT	Black	Yellow	40 ft. (12.19 m)	10.4 in (264 mm)	9.5 in (241 mm)	9.5 in (241 mm)	9.5 lbs (4.3 kg)	cETLus	1 Year Limited
	SL-825	13 watts	No	1 (10 amp)	Polypropylene / Steel	16/3	SJT	Black	Yellow	40 ft. (12.19 m)	10.4 in (264 mm)	9.5 in (241 mm)	9.5 in (241 mm)	9.3 lbs (4.2 kg)	cETLus	1 Year Limited
	SL-826	13 watts	No	0	Polypropylene / Steel	18/2	SVT	Yellow	Yellow	50 ft. (15.24 m)	10.3 in (262 mm)	3.4 in (86 mm)	9.5 in (241 mm)	8.3 lbs (3.8 kg)	cETLus	1 Year Limited
	SL-827	13 watts	Yes	0	Polypropylene / Steel	18/2	SVT	Black	Yellow	50 ft. (15.24 m)	10.4 in (264 mm)	3.3 in (84 mm)	6.5 in (165 mm)	8.5 lbs (3.9 kg)	cETLus	1 Year Limited
	SL-875	26 watts	No	1 (12 amps)	Polypropylene / Steel	16/3	SJT	Black	Yellow	40 ft. (12.19 m)	10.4 in (264 mm)	9.5 in (241 mm)	9.5 in (241 mm)	9.9 lbs (4.5 kg)	cETLus	1 Year Limited
	SL-8907	13 watts	No	1 (12 amps)	Polyethylene	14/3	SJT/W	Black	Yellow	50 ft. (15.24 m)	15.1 in (384 mm)	13.8 in (351 mm)	5.3 in (135 mm)	14.5 lbs (6.6 kg)	cETLus	1 Year Limited
	SL-8908	26 watts	No	1 (12 amps)	Polyethylene	14/3	SJT/W	Black	Yellow	50 ft. (15.24 m)	15.1 in (384 mm)	13.8 in (351 mm)	5.3 in (135 mm)	15 lbs (6.8 kg)	cETLus	1 Year Limited

Cord Reels	Part Number	Cord Length	Amp Rating	Number of Outlets	Integrated Circuit Breaker	LED Status Light	Cord Gauge	Cord Jacket	Cord Color	Body Color	Case Material	Housing Length	Housing Width	Housing Depth	Weight	Certification	Warranty
	SL-755	25 ft. (7.62 m)	10 amps	4	Yes	No	16/3	SJT	Yellow	Yellow	Polyethylene	11.1 in (282 mm)	9 in (229 mm)	3.8 in (97 mm)	3.4 lbs (1.5 kg)	cETLus	1 Year Limited
	CA-80082	30 ft. (9.14 m)	10 amps	3	Yes	Yes	16/3	SJT	Black	Yellow	Steel	10.4 in (264 mm)	3.3 in (84 mm)	6.5 in (165 mm)	6.9 lbs (3.1 kg)	cETLus	1 Year Limited
	SL-800	30 ft. (9.14 m)	10 amps	3	No	Yes	16/3	SJT	Black	Yellow	Steel	10.4 in (264 mm)	3.3 in (84 mm)	6.5 in (165 mm)	6.9 lbs (3.1 kg)	cETLus	1 Year Limited
	SL-801	30 ft. (9.14 m)	13 amps	3	No	Yes	14/3	SJT	Black	Black	Steel	10.4 in (264 mm)	9.5 in (241 mm)	3.3 in (84 mm)	8 lbs (3.6 kg)	cETLus	1 Year Limited
	SL-8903	50 ft. (15.24 m)	13 amps	3	Yes	Yes	14/3	SJT/W	Black	Yellow	Polyethylene	15.1 in (384 mm)	13.8 in (351 mm)	5.3 in (135 mm)	13.7 lbs (6.2 kg)	cETLus	1 Year Limited
	SL-8904	50 ft. (15.24 m)	15 amps	4	Yes	Yes	12/3	SJT/W	Black	Yellow	Polyethylene	15.1 in (384 mm)	13.8 in (351 mm)	5.3 in (135 mm)	16.1 lbs (7.3 kg)	cETLus	1 Year Limited
	SL-8904-40	40 ft. (12.19 m)	15 amps	4	Yes	Yes	12/3	SJT/W	Black	Yellow	Polyethylene	15.1 in (384 mm)	13.8 in (351 mm)	5.3 in (135 mm)	14.3 lbs (6.5 kg)	cETLus	1 Year Limited
	SL-8906	50 ft. (15.24 m)	15 amps	4	Yes	Yes	12/3	SJ/EOW	Black	Black	Polyethylene	15 in (381 mm)	5.3 in (135 mm)	13 in (330 mm)	15.9 lbs (7.2 kg)	cETLus	1 Year Limited

Incandescent Lights	Part Number	Wattage Rating	Number of Outlets	Type of Switch	Clamp/Hook Design	Case Material	Cord Gauge	Cord Jacket	Cord Color	Body Color	Cord Length	Body Length	Body Width	Body Depth	Weight	Certification	Warranty
	SL-201PD06	75 watts	0	Push Button Switch	Spring Steel Clamp w/Vinyl Sleeve	Aluminum	18/2	SPT-2	Black	Silver	6 ft. (1.83 m)	9.4 in (239 mm)	7.4 in (188 mm)	7.4 in (188 mm)	8.8 oz (249 g)	cETLus	1 Year Limited
	SL-300N4	150 watts	0	Push Button Switch	Spring Steel Clamp w/Vinyl Sleeve	Aluminum	18/2	SPT-2	Black	Silver	6 ft. (1.83 m)	5 in (127 mm)	8.6 in (218 mm)	8.6 in (218 mm)	12 oz (340 g)	cETLus	1 Year Limited
	SL-301	150 watts	0	Push Button Switch	Grip-Tite Super Clamp w/Vinyl Sleeve	Aluminum	18/2	SPT-2	Black	Silver	6 ft. (1.83 m)	4 in (102 mm)	8.4 in (213 mm)	8.4 in (213 mm)	13.6 oz (386 g)	cETLus	1 Year Limited
	SL-302B3	300 watts	0	Push Button Switch	Spring Steel Clamp w/Vinyl Sleeve	Aluminum	18/2	SJT	Black	Silver	6 ft. (1.83 m)	8 in (203 mm)	10.4 in (264 mm)	10.4 in (264 mm)	18.4 oz (522 g)	cETLus	1 Year Limited
	SL-406	75 watts	0	Push Button Switch	Swivel Plastic Hook	Polypropylene	18/2	SJT	Black	Black/Yellow	6 ft. (1.83 m)	11.8 in (300 mm)	4.4 in (112 mm)	3.5 in (89 mm)	10.4 oz (295 g)	cETLus	1 Year Limited
	SL-412	50 watts (bulb included)	0	Push Button Switch	Swivel Plastic Hook	Polypropylene	18/2	SPT-2	Black	Black/Yellow	20 ft. (6.1 m)	12.3 in (312 mm)	4.5 in (114 mm)	3.5 in (89 mm)	16 oz (454 g)	N/A	1 Year Limited
	SL-421	75 watts	0	Push Button Switch	Swivel Plastic Hook	Polypropylene	18/2	SJT	Black	Black/Yellow	25 ft. (7.62 m)	11.8 in (300 mm)	4.3 in (109 mm)	3.5 in (89 mm)	23 oz (658 g)	cETLus	1 Year Limited
	SL-425	75 watts	0	Push Button Switch	Metal Hook	Polypropylene	18/3	SJT	Black	Yellow	25 ft. (7.62 m)	13.3 in (338 mm)	4 in (102 mm)	3.6 in (91 mm)	32.8 oz (930 g)	cETLus	1 Year Limited
	SL-425A	75 watts	1 (12 amps)	Push Button Switch	Metal Hook	Polypropylene	16/3	SJT	Black	Yellow	25 ft. (7.62 m)	13 in (330 mm)	4 in (102 mm)	3.6 in (91 mm)	2.4 lbs (1.1 kg)	cETLus	1 Year Limited
	SL-426	75 watts	0	Push Button Switch	Metal Hook	Polypropylene	18/3	SJT	Black	Yellow	50 ft. (15.24 m)	13.3 in (338 mm)	4 in (102 mm)	3.6 in (91 mm)	3.45 lbs (1.6 kg)	cETLus	1 Year Limited
	SL-426A	75 watts	1 (12 amps)	Push Button Switch	Metal Hook	Polypropylene	16/3	SJT	Black	Yellow	50 ft. (15.24 m)	13 in (330 mm)	4 in (102 mm)	3.6 in (91 mm)	4.3 lbs (2 kg)	cETLus	1 Year Limited
	SL-450	75 watts	1 (7 amps)	Push Button Switch	Metal Hook	Polypropylene / Steel	18/3	SVT	Yellow	Yellow	20 ft. (6.1 m)	8.8 in (223 mm)	6.6 in (168 mm)	3.1 in (79 mm)	3.25 lbs (1.5 kg)	cETLus	1 Year Limited
	SL-840	75 watts	1 (10 amps)	Push Button Switch	Metal Hook	Polypropylene / Steel	16/3	SJT	Black	Yellow	40 ft. (12.19 m)	10.3 in (262 mm)	3.4 in (86 mm)	9.5 in (241 mm)	8.6 lbs (3.9 kg)	cETLus	1 Year Limited
	SL-851	75 watts	0	Push Button Switch	Metal Hook	Polypropylene / Steel	18/3	SVT	Yellow	Black	50 ft. (15.24 m)	10.4 in (264 mm)	9.5 in (241 mm)	3.3 in (84 mm)	7.9 lbs (3.6 kg)	cETLus	1 Year Limited

Halogen Lights	Part Number	Light Output Wattage	Variable Light Output	Type of Switch	Spare Bulb	Cord Gauge	Cord Jacket	Cord Color	Body Color	Cord Length	Certification	Warranty
	SL-1002	500 watts	No	None	Yes	18/3	SJT/W	Black	Yellow	3 ft. (0.91 m)	cULus	1 Year Limited
	SL-1003	500 watts	No	Single Sealed Push Button	Yes	18/3	SJT/W	Black	Red	5 ft. (1.52 m)	cULus	1 Year Limited
	SL-1005	1000 watts	Yes (500 or 1000 watts)	2 Sealed Rocker Switches	No	18/3	SJT/W	Black	Yellow	6 ft. (1.83 m)	cULus	1 Year Limited
	SL-1006	1000 watts	Yes (500 or 1000 watts)	2 Sealed Push Buttons	Yes	18/3	SJT/W	Black	Red	6 ft.		