



1998-04 MUSTANG V6, GT & COBRA 300 LPH DIRECT REPLACEMENT ELECTRIC FUEL PUMP KIT

Part# 1861, 1862 and 1863

⚠ WARNING

THIS ROTARY FUEL INJECTION PUMP WILL NOT WORK ON CARBURETED FUEL SYSTEMS. IT IS FOR ELECTRONIC FUEL INJECTION ONLY.

Special Tools Required:

- Hoist or end lift jack
- OSHA approved safety stands
- OSHA approved fuel transfer pump
- OSHA approved fuel storage containers
- Variety of mechanics hand tools

Install Time:

Approximately 3 hours

Difficulty:

3 out of 5



FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION.


PRECAUTIONS FOR FUEL SYSTEM SERVICE

TO REDUCE THE RISK OF FIRE AND PERSONAL INJURY IT IS NECESSARY TO OBSERVE THE FOLLOWING PRECAUTIONS:

- Perform this repair ONLY in a properly equipped service facility.
- Position the vehicle in a clear, level, well ventilated work area.
- Make sure there are no sources of spark or combustion near the work area.
- Perform work in a no-smoking area, or post no-smoking signs in the area selected.
- Have readily available a fully functional Class B fire extinguisher of adequate size (such as a 5 pound CO2 as a minimum.)
- Disconnect the ground cable from the vehicle's battery before performing any operation involving gasoline, gasoline tanks or gasoline lines.
- Allow the vehicle to cool before performing any operation which could possibly expose gasoline or gasoline vapors to hot parts such as catalytic converters, hot light bulbs, or similar components.
- Avoid using extension cords or lights which might overheat or cause sparks.
- Avoid inhaling gasoline fumes and prolonged skin contact with gasoline.
- Promptly wash any body areas which have been in contact with gasoline.
- Wear approved safety glasses while performing any repairs.
- When raising the vehicles to perform under-vehicle services, use proper hoisting or jacking equipment along with approved safety supports.
- When removing gasoline from a fuel tank use an OSHA approved pump that is specifically designed for handling gasoline. DO NOT USE any other type of pump. Gasoline removed from a fuel tank must be stored in approved gasoline containers.

It is impossible to anticipate all possible risk and conditions under which repairs may be made to a fuel system. Therefore, in addition to the safety concerns listed, you are urged to carefully evaluate the hazards involved in such a service procedure and take whatever further precautions that may be necessary.

NOTE: This tank unit may look different than the O.E. unit. This replacement unit meets all specifications established by the O.E. manufacturer. It will fit and function properly if all the installation procedures outlined in this instruction sheet are followed.

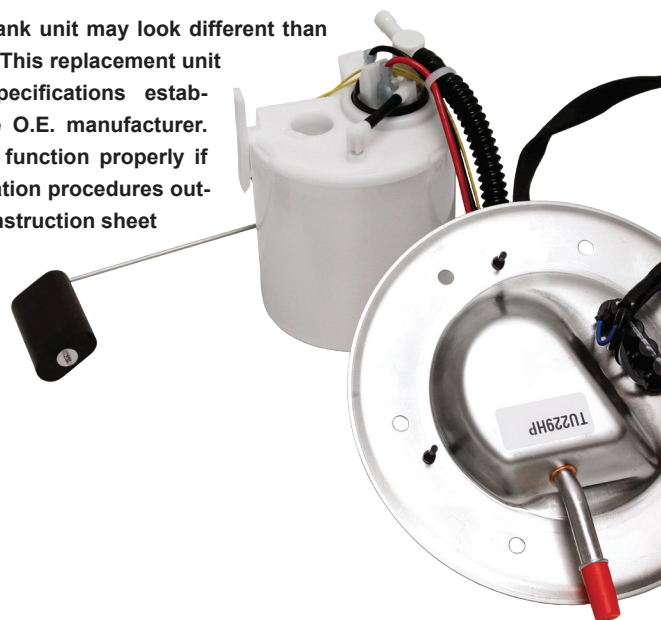

CAUTION: Read these instructions thoroughly from start to finish before attempting to replace the fuel pump.

GO TO NEXT PAGE →



1998-04 MUSTANG V6, GT & COBRA 300 LPH DIRECT REPLACEMENT ELECTRIC FUEL PUMP KIT

Part# 1861, 1862 and 1863

NOTE: The words “tank unit” used throughout this instruction sheet means fuel pump tank unit and fuel level sender assembly.

**WARNING. HAVE ABSORBENT SHOP TOWELS READILY AVAILABLE WHEN REMOVING THE TANK UNIT.
SOME FUEL WILL SPILL WHEN THE TANK UNIT IS REMOVED.**

PREPARATIONS

STEP 1

Relieve fuel system pressure.

NOTE: The fuel system can retain gasoline under pressure considerable period of time. Opening a pressurized line could spray fuel creating a risk of fire and personal injury.

- Remove the fuel cap from the tank to relieve any tank pressure.
- Locate the Power Distribution Block and remove the Fuel Pump Relay. Relay locations are described inside the cover of the Power Distribution Block.
- With the Fuel Pump Relay removed, crank the engine to bleed down fuel system pressure. The engine will start and stall several times. Continue to momentarily crank the engine several more times. Be sure to turn the ignition switch completely to the off position between cycles. Once the engine no longer tries to start, the fuel system pressure is relieved.

STEP 2

Disconnect the negative (-) cable from the battery and position it so it cannot accidentally make contact with the negative (-) battery post during the fuel pump replacement procedure.

NOTE: Be sure an appropriate fire extinguisher is readily accessible before continuing with the service procedure.



STEP 3

Drain the fuel tank with an OSHA approved gasoline transfer pump. Place the suction hose of the pump into the fuel tank through the filler neck.

NOTE: Be sure the hose is completely inserted into the tank. All of the fuel must be drained before trying to remove the fuel tank.

REMOVE AND REPLACE TANK UNIT

STEP 4


Remove the skid plate and any shields that may interfere with removal of the fuel tank.

STEP 5

Remove the fuel filter and vent hoses from the fuel tank.

STEP 6

Support the fuel tank and remove the tank retaining straps.

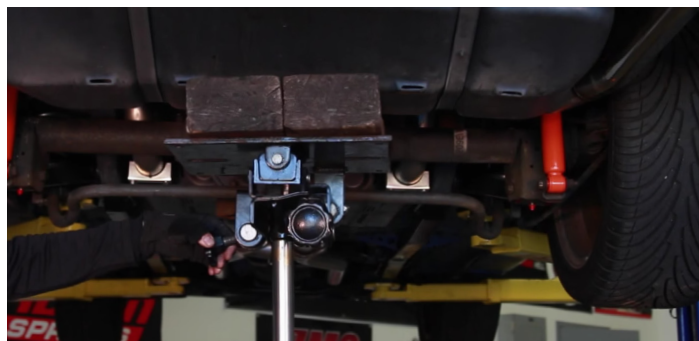

STEP 7

Lower the fuel tank enough to access the tank unit.

GO TO NEXT PAGE →



1998-04 MUSTANG V6, GT & COBRA 300 LPH DIRECT REPLACEMENT ELECTRIC FUEL PUMP KIT

Part# 1861, 1862 and 1863

STEP 8

Disconnect the fuel lines and electrical wiring to the tank unit. Be sure all other lines and wires are disconnected from the fuel tank before removing the fuel tank from the vehicle.



STEP 9

Carefully lower the fuel tank out of the vehicle.

CAUTION: Take care when lowering the fuel tank from the vehicle. Be careful not to cause sparks in or around the fuel tank.

STEP 10

Clean any debris or foreign material from around the tank unit area of the fuel tank. Note the direction of the fuel out tube!

STEP 11

Remove the module assembly flange bolts.



STEP 12

Check the inside of the fuel tank for foreign debris and clean out the tank if necessary.

STEP 13

Pull the Tank Unit assembly flange up and out of the fuel tank until the locking tabs are accessible. Reach through the opening and squeeze the locking tabs together and remove the module from the tank by lifting up and out.



STEP 14

Clean the tank unit flange mounting surface. Install the tank unit module by pushing down on the module until the module tabs click and engage the retainer.

STEP 15

Install the tank unit flange on the fuel tank with the fuel out tube in the same direction as when removed. Finger tighten all the bolts, then tighten using the sequence shown in the image below.



GO TO NEXT PAGE →



1998-04 MUSTANG V6, GT & COBRA 300 LPH DIRECT REPLACEMENT ELECTRIC FUEL PUMP KIT

Part# 1861, 1862 and 1863

STEP 16

Lift the fuel tank into position in the vehicle. Reinstall all fuel lines and electrical connections.

NOTE: It may be necessary to loosen the fuel filter and slide it back in its mount toward the tank to allow better fit of the fuel line onto the module.

STEP 17

Install the fuel tank retaining straps and tighten the retaining nuts. Do not over tighten the retaining strap nuts.



STEP 18

Reinstall the filter neck and vent hoses.



NOTE: This pump will not remedy malfunctions of the regulator, injectors or other fuel system components.

WRAP UP

STEP 19

Using only equipment designed for use with gasoline, refuel the fuel tank with gasoline.

NOTE: Be sure to clean up any fuel spills before proceeding.

STEP 20

With the ignition switch off, reconnect the negative (-) cable to the battery.

STEP 21

Reinstall the fuel pump relay in the power distribution center.

STEP 22

Start the engine and inspect the fuel lines and connections for leaks. Correct any leaks as necessary.

STEP 23

Clear any trouble codes in the electronic control system that may exist as a result of the fuel pump replacement procedure. If necessary, use the specific vehicle service manual for assistance.

TROUBLESHOOTING

Should the pump fail to operate:

- Check the fuel pump fuse and fuel pump relay as outlined in the service manual.
- If the pump has power and proper polarity, check the remainder of the fuel system as outlined in the service manual.