

Thank you for purchasing SLA-101. Please carefully review the following information and instructions to ensure a successful installation for you to enjoy.

Make/Model	Year	Chassis Code
TOYOTA / LANDCRUISER	2003-2007	GH-UZJ100W•KR-HDJ101K

Application/Product Description

1. Plug and play stereo interface to replace OEM headunit to aftermarket head unit.
2. OEM Amplifier and climate controls are retained even after aftermarket head unit installation.
3. Steering wheel controls are not retained.
4. To install a 1DIN head unit, please purchase and install a separate 1DIN pocket to fill in the extra space.

Precautions

- ✘ This adapter is not compatible to models with OEM Navigation / Multi-vision.
- ✘ Front and rear speaker fader will be lost due to OEM amplifier being 2-channel.
- ✘ Depending on head unit, you may experience a faint popping noise when turning the radio on or off.

Dimensions / Weight

- ✘ 40 × 25 × 82.0mm 210g

Contents

- ✘ SLA-101 Adapter, Side Panels (L&R), Brackets (L&R), Fascia Panel, Screws (4x2), Nuts (4), User's Guide.

When Performing Installation Procedures

- ✘ Make necessary precautions to not disturb vital parts related to the operation of the vehicle.
- ✘ Do not perform installation in negligent or in dangerous climate and environments.
- ✘ Be cautious not to damage wires, interior or body during installation.

- ✘ Any Damages resulting to the aftermarket systems or damages to the vehicle resulting from improper or careless installations are not covered by warranty, nor are we responsible for injuries or damages resulting from installation process. Please observe caution while installing.

2 Adapter Installation


Amplifier Remote Line

Amplifier remote line may also carry the following names:

- Amplifier Remote
- Power Controller
- P. Cont Out
- System Controller
- Controller + B
- Remote
- Remo
- Remote On Code

- ✘ When the amp remote line is not available on the aftermarket head unit, connect to power acc

Correctly connect all wires as shown using 14-16 gauge bullet connectors.

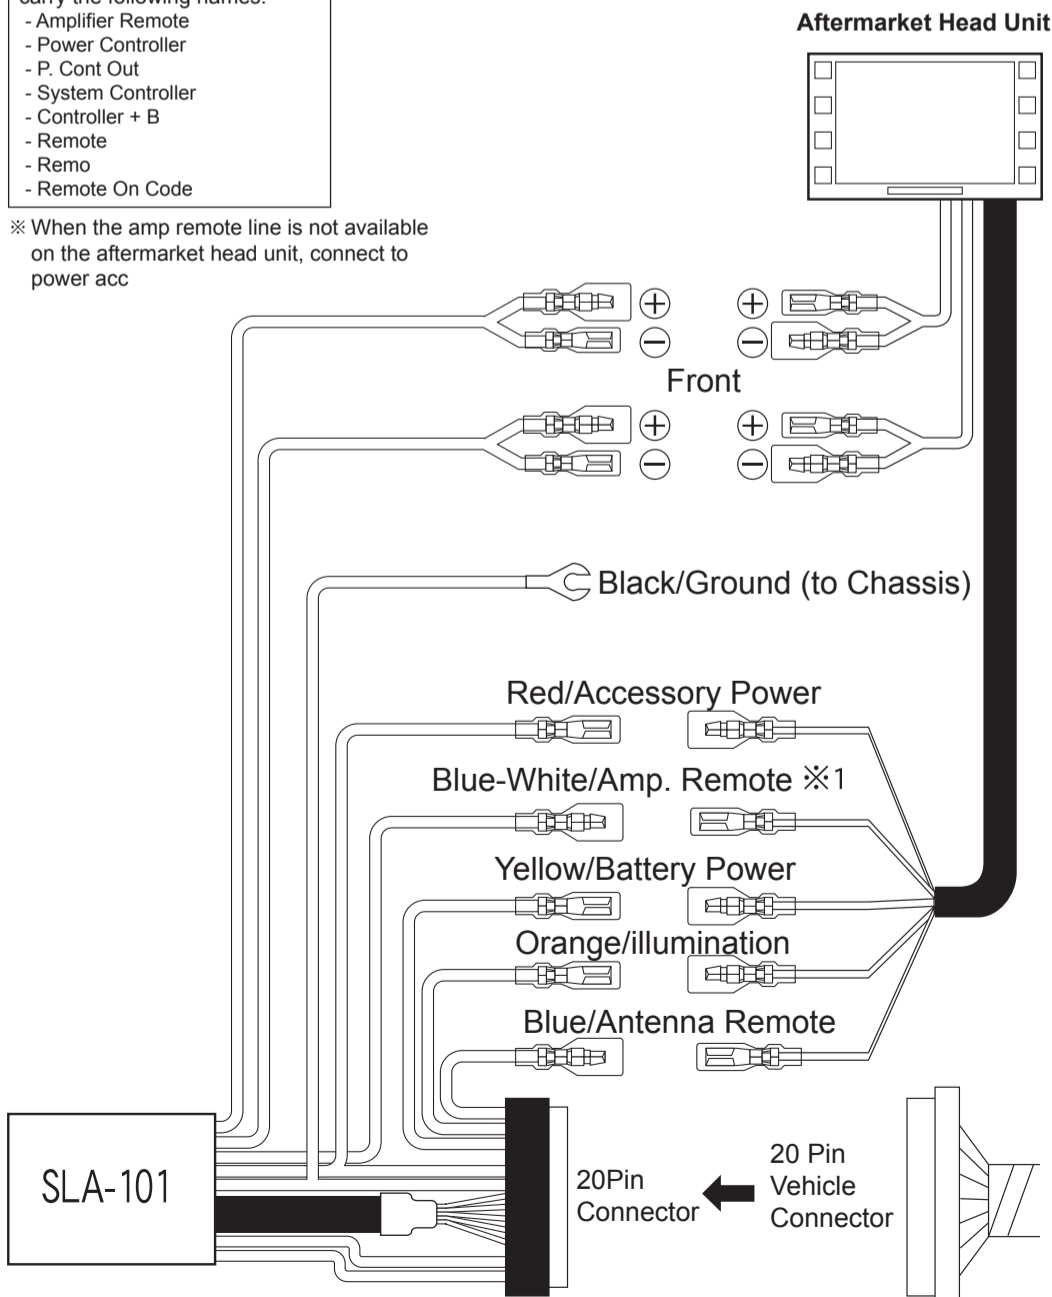

Precautions before installation

- ✘ Remove the negative terminal from the battery.
- ✘ Protect the interior of the vehicle by covering the interior work areas with cloth or tape.
- ✘ After installation, confirm proper operation of brake lamp, headlight, turn signals, wiper blades and other functions




- ✘ Before installing the new head unit or navigation, confirm that the OEM audio is functioning properly without any complications or issues. This kit will not remedy any existing issues.

1 OEM Head Unit Removal


Depending on the trim level, follow the appropriate step A or B below:

- 1-A.** Remove the 2 dash interior side panels (6 clips for each side)

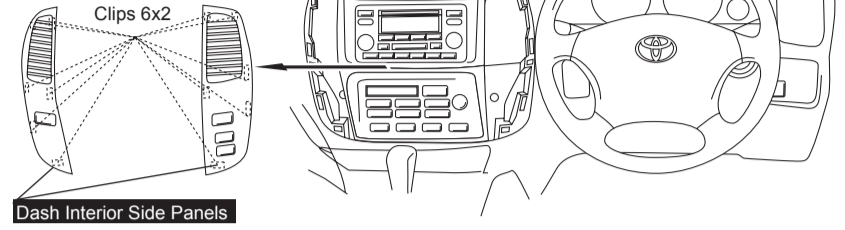


- 1-B.** 1. Front panel is removed (clips x 9)

2. AC vent panels are removed (clips 5 x 2)

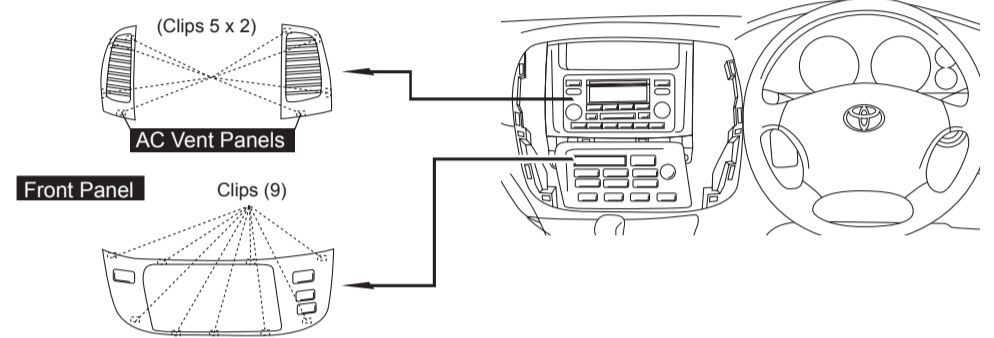


- 2.** OEM Head unit is removed (Screws x 4)

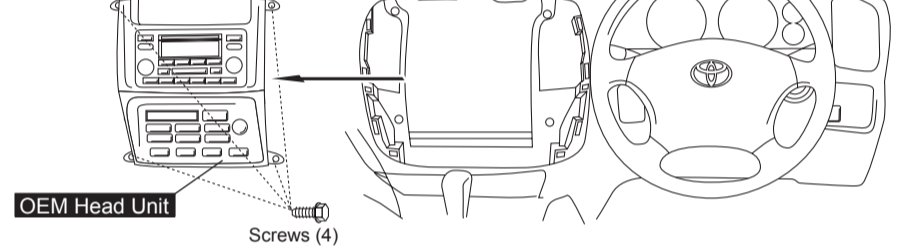


3 Installation of new Aftermarket Head Unit


- 1.** Mount the climate control and display to the fascia panel (Screws x 4)

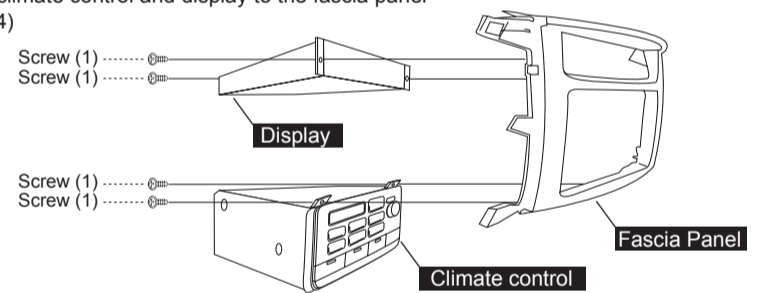


- 2.** From the supplied side panel plates, cut off and remove the sections marked This removed sections will not be necessary in this application install.

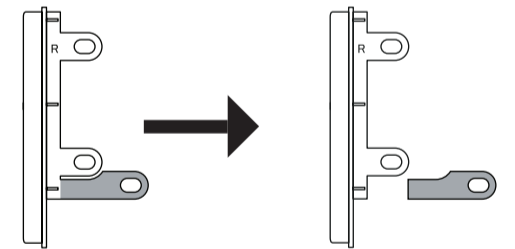

- 3.** Mount the L&R brackets to the aftermarket head unit, then mount the side panels, then insert to the fascia panel.

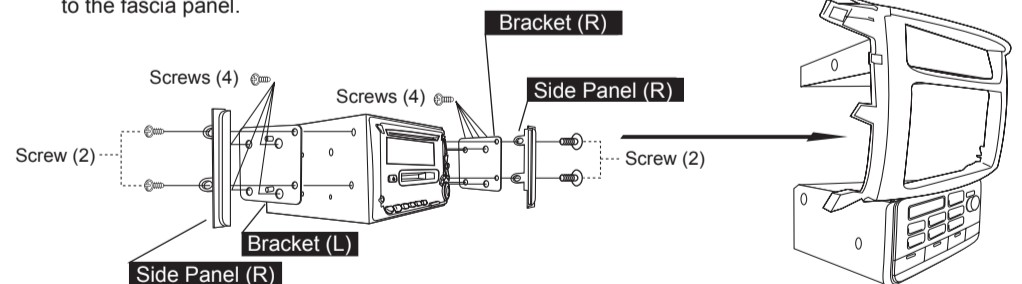

- 4.** Attach the L&R OEM brackets to climate control, display and brackets (2 OEM Screws x 2, supplied nuts x 2)

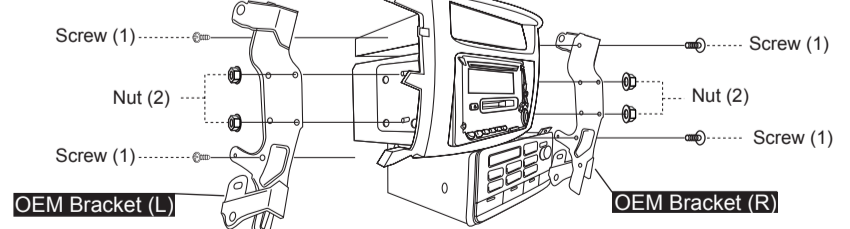

4 Verification of Operations and Features

After installation, verify all functions of the aftermarket radio and the functions of the vehicle. Use extreme caution when verifying all operations and equipments of the vehicle.