

# TV-Controller

NO:

## User Manual


Thank you for purchasing the Beat-Sonic [TV-Controller](#). You have purchased from Japan's leading supplier of car audio interface adapters. Designed and made in Japan, this product represents our commitment to excellence and quality in manufacturing.

Please read this manual carefully prior to installing and using this product to ensure correct operation.

### TV-Controller Operating Instructions

This device utilizes a manual switching operation so please install the surface mount switch in an easily accessible location.

Select TV mode to switch on the TV-Controller. Depending on the head unit, navigation may not function whilst the TV-Controller is on. Switch the TV-Controller to NP mode (normal position) to return to standard functionality.

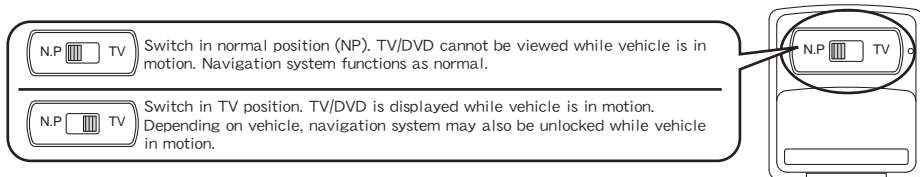


- ※Backup camera and side cameras can be operated in conjunction with this device.
- ※This device is designed to allow viewing of the TV while the vehicle is in motion. On certain models of navigation systems however, this device will also override the navigation system lockout while the vehicle is in motion.
- ※Depending on the model of navigation system, an error may occur with the vehicle location while the TV-Controller is switched on. Operation will return to normal after the TV-Controller is switched off (N.P), however the navigation system may take a few moments to re-calibrate correct vehicle position.

### Installation Instruction


This product requires removal and re-installation of the navigation/display unit.

Disassembly of the centre panel and various trim panels vary greatly according to each vehicle. Please check with your motor vehicle dealer to obtain all necessary instructions and take due care during installation so as no to damage any parts.

- 1 Turn off engine and disconnect the battery negative terminal.
- 2 Remove all necessary panels and fasteners to allow access to the rear of the navigation/display system.
- 3 From the rear of the navigation/display unit, locate the harness connector that looks the same as the TV-Controller connector and disconnect it.

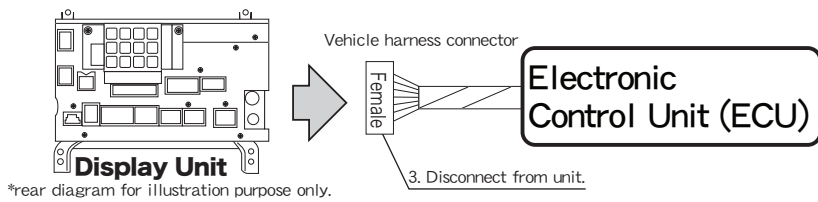


- 4 Connect the disconnected vehicle harness connector to the male connector of the TV-Controller. Connect the female connector of the TV-Controller to the navigation/display unit. Repeat for all applicable connectors including GPS connector.
- \*The number and type of connectors will vary depending on type of TV-Controller.

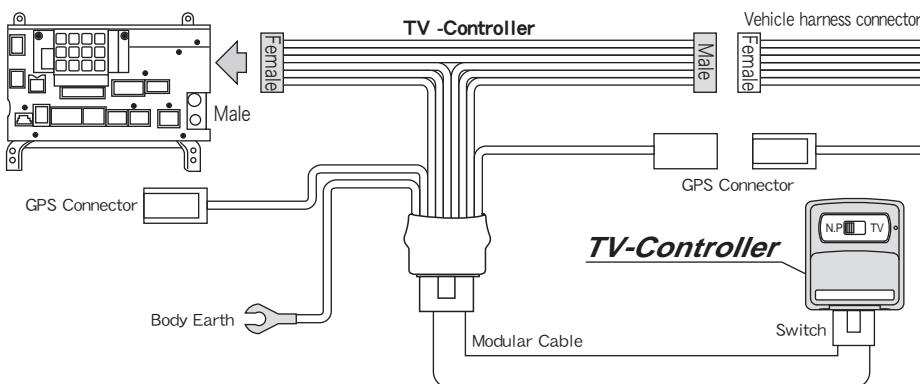

- 5 Reconnect the battery negative terminal and conduct a test drive to confirm that monitor displays DVD, TV, DivX etc. while the vehicle is in motion.
  - \*Ensure all cables and connectors are properly inserted and returned to their original positions before conducting test drive.
  - \*Test drive must be conducted with at least 2 people in the car.
  - \*The passenger and not the driver must check that the monitor is displaying images correctly whilst the vehicle is in motion.
- 6 In the event of a problem with the navigation/display system during a test drive, double check that all connectors are correctly installed.
- 7 After confirming correct operation, use the provided double-sided tape to mount the TV-Controller switch in a suitable location. Select a location that is easily accessible and where it will not interfere with any other parts. Return all disassembled parts to their original positions to complete the installation.

### TV-Controller Switch Installation

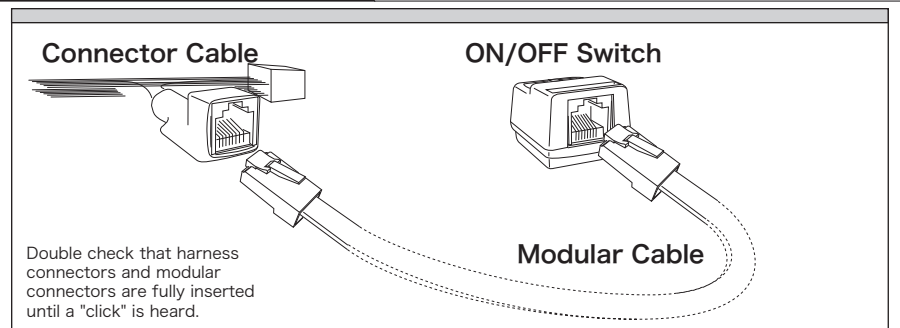


### Warning: Operation

This product is designed for use by the passenger of the vehicle. Under no circumstance should the driver operate the navigation system whilst the vehicle is in motion.

### Warning: Before Installing

- \*Disconnect negative terminal of battery prior to installation.
- \*Secure cables and wiring using good quality PVC insulating tape to prevent possible damage.



### Warning: Installation

- \*Install TV-Controller harness and switch box where it will not interfere with operation of the vehicle.
- \*Take due care not to damage interior trim, wiring or any other parts during installation. Wearing of cotton work gloves or equivalent is recommended.
- \*Do not install in areas of high humidity, dust or where it is likely to get wet.
- \*Beat-Sonic accepts no responsibility for damage, injuries, malfunctions, traffic law infringements etc. caused as a result of using this product.

### Warning: Warranty Claims

- \*This product carries a 1 year warranty from date of purchase.
- \*Ensure that proof of purchase is retained for all warranty claims.
- \*Before claiming warranty, please check harness and connectors are properly connected. Improperly secured connectors account for almost all malfunctions.
- \*If after checking connections the fault still exists, please contact your Beat-Sonic distributor or Beat-Sonic head office.
- \*Please provide proof of purchase and specific details of malfunction when claiming warranty.
- \*Disassembly, modifications or any other changes to the product will render the warranty void.