


Appendix B: LEXUS SC430 (from 2005y)

- How to insert Video cable -


1. Remove MultiDisplay ASSY.
2. Disconnect the 24P connector from MultiDisplay.
3. Unlock retainer.

a. Insert a small flathead to release clips.

b. Lift the retainer.

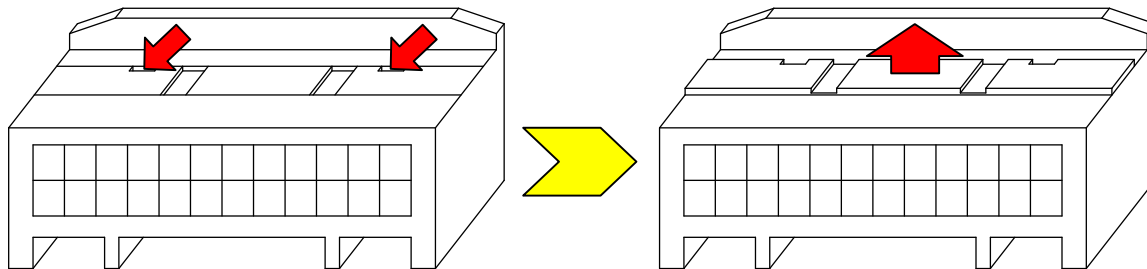


4. Connect the video cable to 24P connector: White wire on pin#13 and Black wire on pin#15 as shown below.

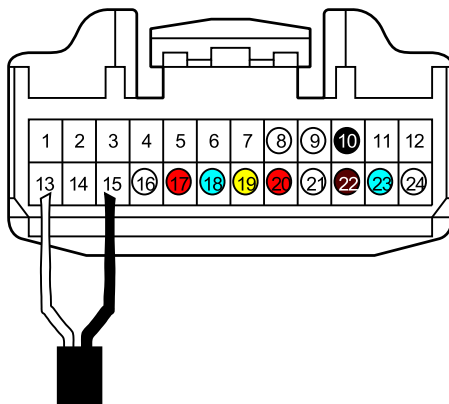

※ Above diagram shows the front of connector. Please insert the cable from the backside.

5. Close and lock the retainer.

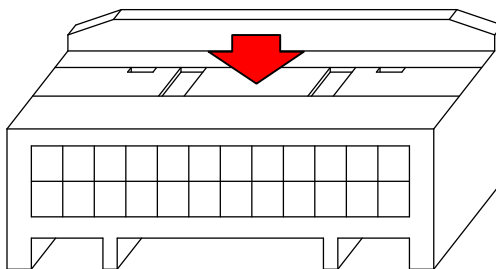

6. Connect the 24P connector back onto the Multi-Display.
7. Mount the Multi-Display back to factory location.

***Note that video will display on the OEM Screen only when the parking brake (foot brake/e-brake) is engaged. Further, there must be video being fed to the OEM screen VIA RCA cable. In order to achieve Video in motion, see Appendix C.