



Installation Instructions

HighRock 4x4™ Rear Bumper

Vehicle Application: 1986 - 2006 Jeep® Wrangler and
Wrangler Unlimited

•HighRock 4x4™ Rear Bumper
Part Number: 42902 / 44902

INSTALLATION TIME	SKILL LEVEL		
 1-1/2 Hours	 3 - Moderately Difficult		
TOOLS			
 Socket 18mm, 19mm and 15/16"	 Ratchet	 Hammer	 Wrench 18mm and 19mm
 Safety Glasses			



! WARNING This product is designed primarily to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to protect against injury or death in the event of an accident. Never operate the vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.



HighRock 4x4™ Rear Bumper Installation Instructions

Parts List and Hardware Identification

- Rear Bumper, Part Number 414.44 (Gloss Finish), Part Number 498.26 (Matte Finish), Qty - 1



Hardware Kit Part # 485.75

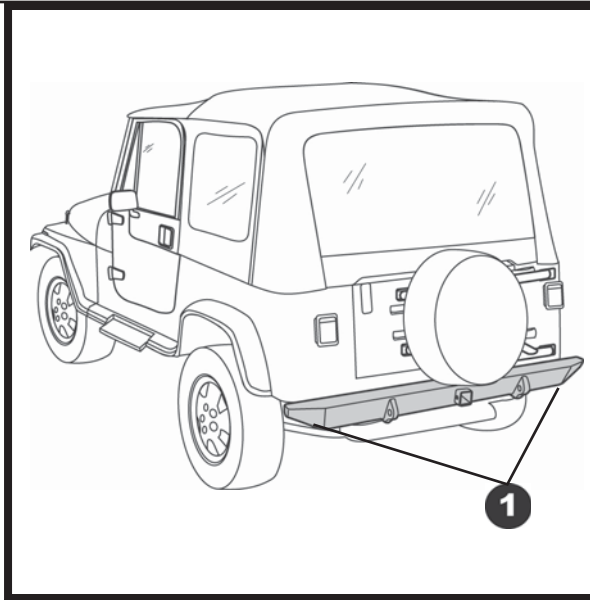




CAUTION

Two or more people may be required to lift the bumper safely.

1 Remove the Original Bumper

Use a socket wrench and an 18mm socket to remove the two (2) bolts on each end of the bumper that attach it to the frame.

Remove the 18mm bolts that attach the bumper to the frame, one under each end of the bumper. Set the bolts aside to be used to install the HighRock 4x4™ Rear Bumper.

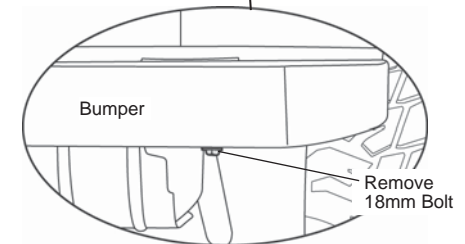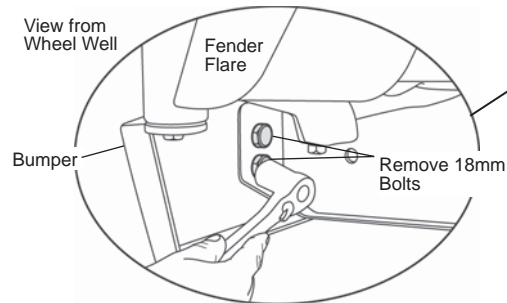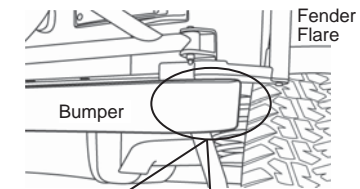

HighRock 4x4™ Rear Bumper Installation Instructions



CAUTION

Two or more people may be required to lift the bumper safely.





2

Install Rear Bumper

Place the HighRock 4x4™ Rear Bumper on the vehicle and install two (2) Hex Bolts from the parts kit on each side of the vehicle for '97 - '06 Wranglers. For '86 - '96 Wranglers install four (4) Hex Bolts.

Then reinstall the 18mm Bolt under the bumper on each side of the vehicle.

View from
Wheel Well

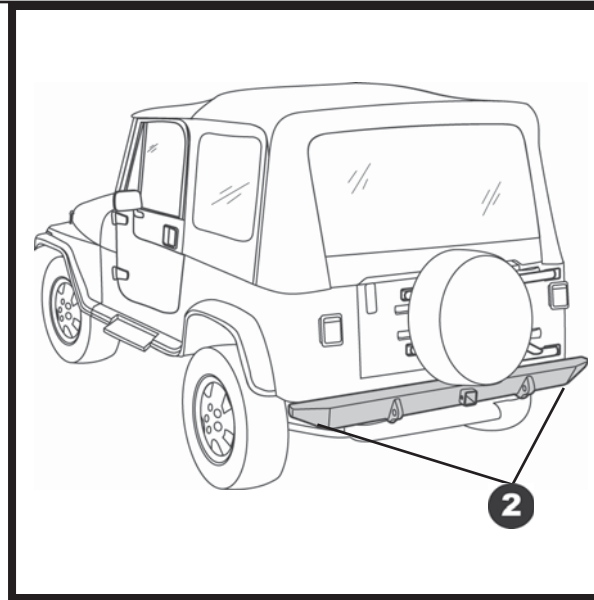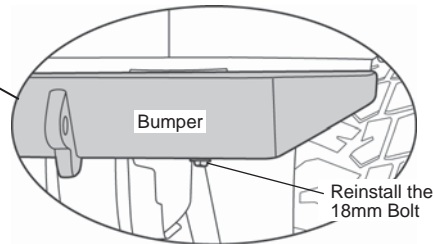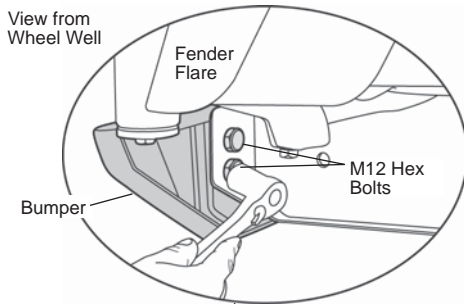

WARNING

Tow Rating Warning

Do not exceed the vehicle manufacturer's recommended towing capacity.



WARNING

DO NOT cut, drill, weld or modify the Bumper.