



Installation Instructions

TJ / JK Tailgate Organizer Storage

Vehicle Application

- Jeep Wrangler (YJ, TJ & TJD) 1987 - 2006
Part Number: 54136
- Jeep Wrangler & Unlimited (JK) 2/4 Door
2007 - Current
Part Number: 54136

INSTALLATION TIME



1/4 Hour

SKILL LEVEL

1

2

3

4

1 - Easy

TOOLS

Power Drill



1/8" Bit

Phillips
Screwdriver



Safety
Glasses



CAUTION

Safety glasses should be worn at all times while installing this product.



WARNING



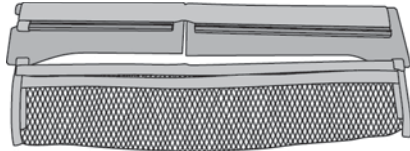




This product is designed primarily to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to protect against injury or death in the event of an accident. Never operate the vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.


TJ / JK Tailgate Organizer Storage – Installation Instructions

Parts List


<div><div>A</div><div>Large Bag. 499.12</div><div></div></div>	<div><div>B</div><div>Small Bag, 499.13</div><div></div></div>	<div><div>C</div><div>Organizer Mount. 499.14</div><div></div></div>	
<div><div>D</div><div>Left Side Bag Reinforcement, 499.15 X2</div><div></div></div>	<div><div>E</div><div>Right Side Bag Reinforcement, 499.16 X2</div><div></div></div>	<div><div>F</div><div>Screw, 499.17 X5</div><div></div></div>	<div><div>G</div><div>Plug, 499.67 X5</div><div></div></div>

TJ / JK Tailgate Organizer Storage – Installation Instructions


1

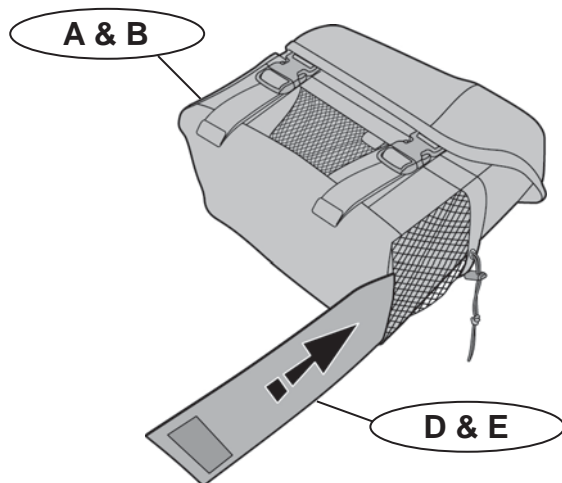

2 2007 – Current

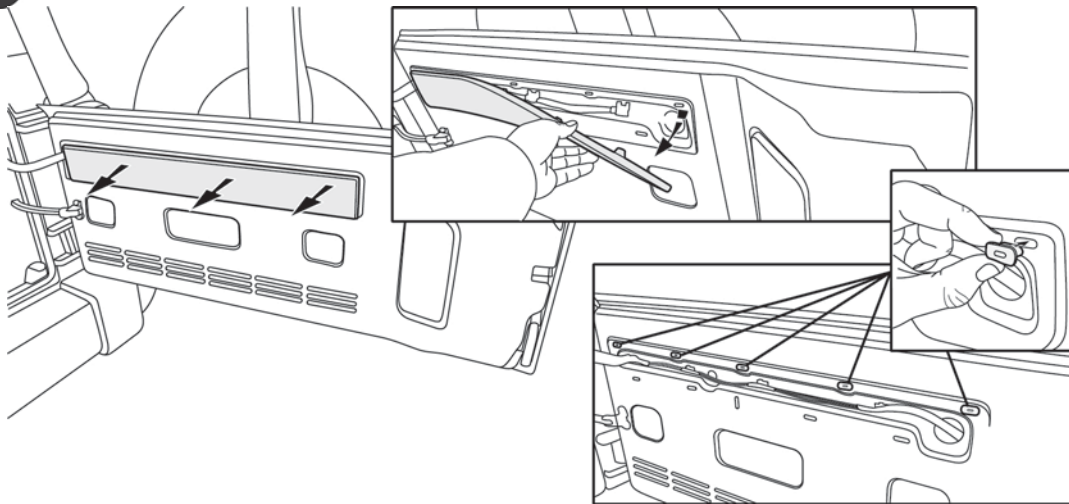


2 1987 – 2006

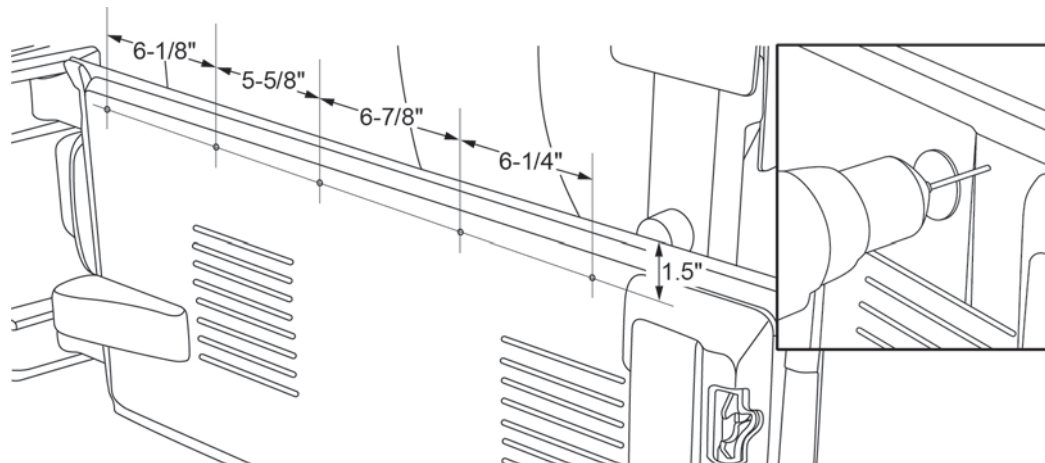


TJ / JK Tailgate Organizer Storage – Installation Instructions

3

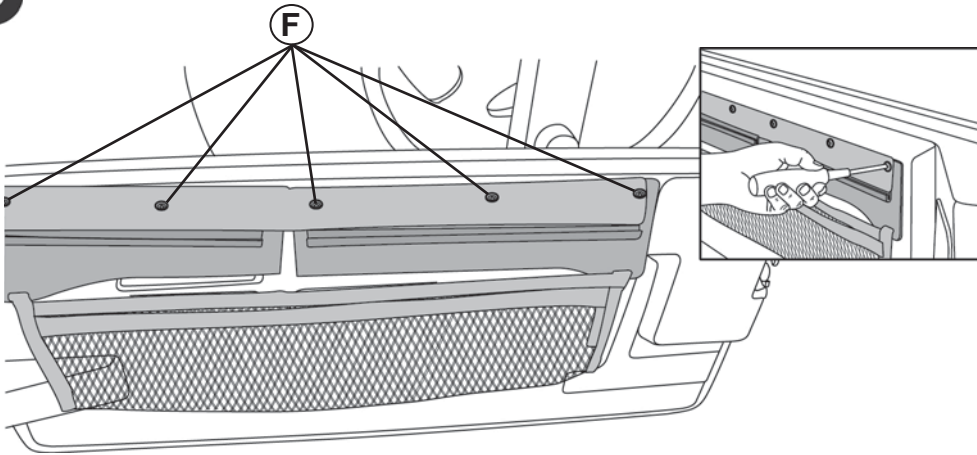

4

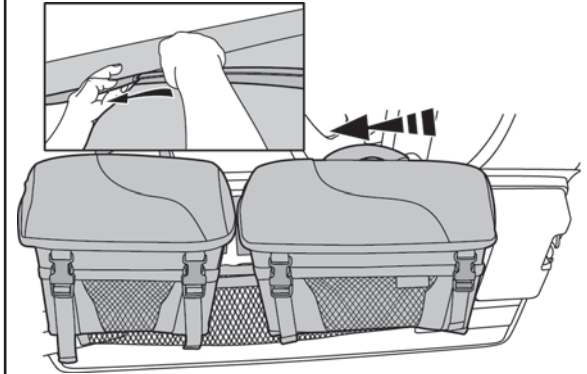

TJ / JK Tailgate Organizer Storage – Installation Instructions

Care and Maintenance of your Bestop Product

Your Bestop product is made of the finest materials available. To keep it looking new and for the maximum possible wear, it will need periodic cleaning and maintenance.

Fabric: The fabric should be washed often using soap, warm water and a soft bristle brush. Rinse with clear water to remove all traces of soap. Bestop recommends using Bestop Cleaner (part no. 11201-00) and Bestop Protectant (part no. 11202-00). Bestop Cleaner and Bestop protectant are specially formulated to provide a total cleaning and protection system. Bestop Cleaner safely removes the toughest stains, will not harm vehicle finishes, is biodegradable and environmentally friendly. Bestop Protectant protects against UV-fading, cracking and hardening, and repels dust, grease, dirt and mildew.

Zippers: Keeping zippers cleaned and lubricated with Bestop's Zipper Cleaner (part no. 11206-00) will help prevent damage and keep the zippers in smooth working condition. If a zipper opens behind the slider, the slider may have been spread apart. This problem can usually be repaired by using an ordinary pair of pliers to bring the sides back into parallel. Return slider to the end of the zipper in the normal Open position. Squeeze lightly at first and test the zipper. If the zipper continues to remain open squeeze more firmly with the pliers and try the zipper again. Repeat this procedure until the zipper operates correctly.

Water: Seeping through at the seams may be stopped by applying 3-M Scotchgard® on the inside of the seams. Rips in the fabric may be repaired with Bondex® iron on patches. Iron the patches to the Inside of the top, carefully following the Bondex® instructions.

Snap: Keep snaps cleaned and lubricated with silicone to help prevent snaps from sticking to the studs. If a snap does become stuck to a stud, use a screwdriver and GENTLY pry apart to prevent permanent damage to the snap or the top fabric.

