



TJ High Back Front Seat Cover Installation Instructions

For: TJ Wrangler, 1997 - 2002

Part Number: 29226



WARNING

DO NOT remove the seats from the vehicle to install this product.

Parts List

Seat Covers Qty - 2



WARNING

This product is designed to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. Never operate vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing this product. Failure to do so could place occupants of the vehicle in a potentially dangerous situation. After installing or reinstalling, check to make sure it has been properly installed.

Installation


Step One

SLIDE SEAT COVER OVER BACK OF SEAT

Orient the Seat Cover with the quilting toward the front of the seat. Slip the opening in the cover over the seat back and pull the cover down to the seat bottom.

Pull Web Loop through opening in cover

Pull Cover over back of seat

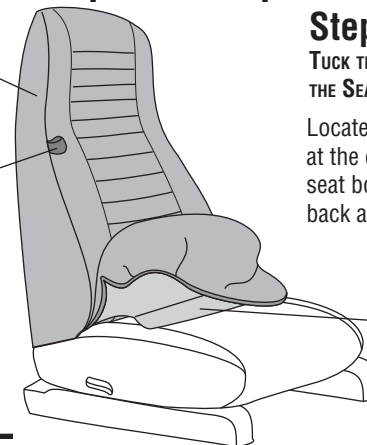

Note: Pull the loop sewn to the seat through the opening in the cover.

Step Two

TUCK THE CENTER FLAP BETWEEN THE SEAT BACK AND THE SEAT BOTTOM

Locate the flap sewn to the inside of the cover at the corner between the seat back and the seat bottom. Tuck the flap between the seat back and the seat bottom.


Slide flap between seat back and seat bottom

Step Three

Secure the Flap

Slide the cover over the seat bottom, making sure that the seat adjustment lever on the side of the seat operates freely. Fold the seat back forward. Pull the flap from the previous step through to the back of the seat. Firmly press the hook strip sewn to the flap to the fabric backing inside the bottom of the cover.

Pull flap through and fasten hook to the inside cover

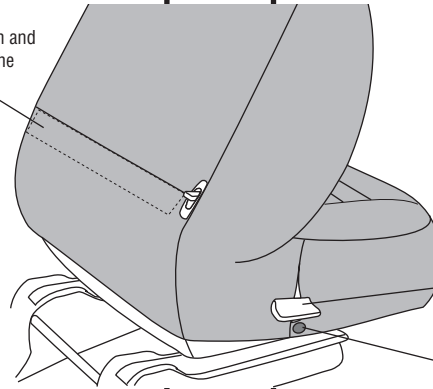

Step Four

Secure the Snap

Make sure that the elastic on the bottom of the cover is around the Seat Adjustment Lever and that the lever operates freely. Fasten the snap to secure the seat cover around the lever.

Seat Adjustment Lever

Work elastic around lever and fasten snap