





Installation Instructions




HighRock 4x4™ JK

Replacement Mirrors

Vehicle Application:

- Jeep Wrangler Unlimited
2007 – Current
Part Number: 51260

INSTALLATION TIME	SKILL LEVEL
 1/2 Hour	 1 - Easy

TOOLS		
 Torx Wrench T40	 Allen Wrench 5 mm	 Safety Glasses




⚠ WARNING This product is designed primarily to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to protect against injury or death in the event of an accident. Never operate the vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES


Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.

HighRock 4x4™ Replacement Mirrors Installation Instructions

Parts List




Left Mirror, Part Number 476.43, Qty - 1




Right Mirror, Part Number 476.42, Qty - 1



M8 Washer, Part Number 431.71, Qty - 4

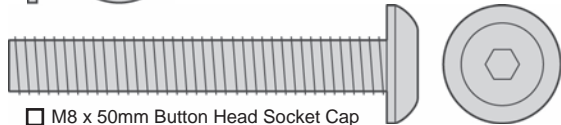

M8 x 50mm Button Head Socket Cap Screw, Part Number 444.34, Qty - 4

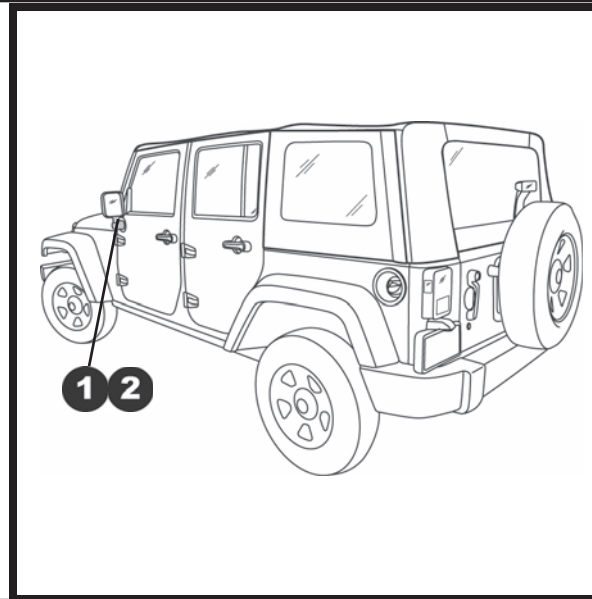


2 Install Mirrors

Use the bolts removed in Step 1 to install the HighRock 4x4™ Replacement Mirrors on the door hinges on each side of the vehicle.

NOTE If the OEM torx bolts are not reusable, use the supplied fasteners.

HighRock 4x4™ Replacement Mirror

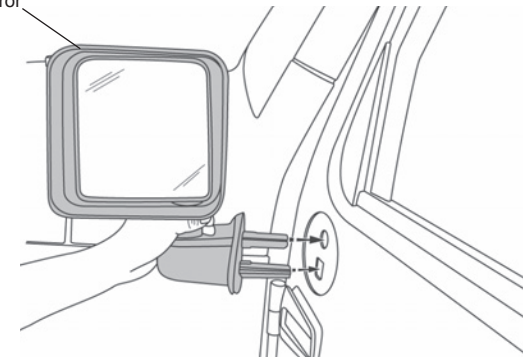

1 Remove Existing Mirrors

Use a T40 Torx driver to remove the two (2) bolts that secure each of the old mirrors. Set the bolts aside to install the HighRock 4x4™ Replacement Mirrors.

