



MOUNTING INSTRUCTION E4-WM5-Y133A00

1. nut torque 11 ft lb *B
2. washer
3. nut torque 16 ft lb
4. support bearing
5. rubber pad
6. helical spring
7. rubber pad
8. cap
9. bumper
10. dust cover
11. top cap *B
12. BILSTEIN shock absorber
13. spring plate *B
14. spring ring
15. hexagon bolt torque 93 ft lb

*B =

mounting parts delivered by BILSTEIN

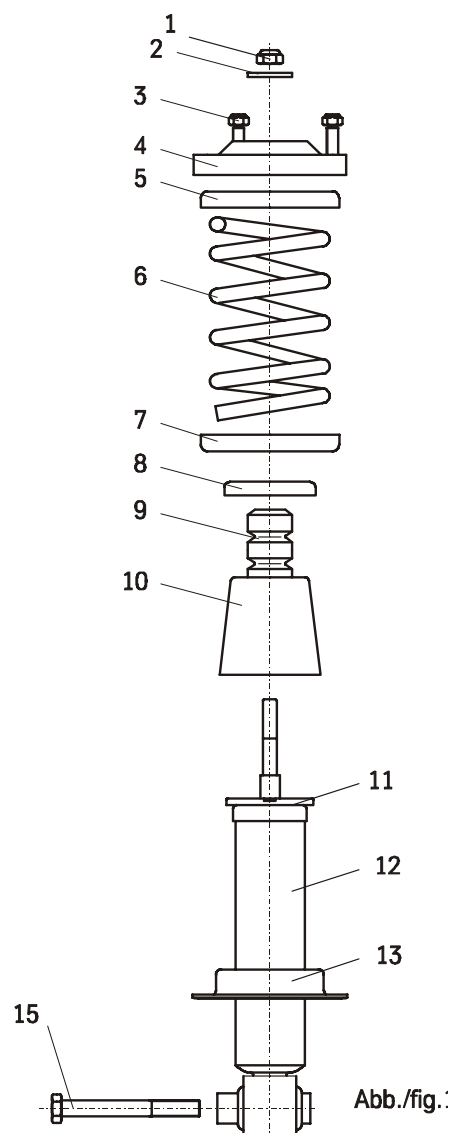

ATTENTION!

When fitting the spring plate (13) care must be taken to ensure that the spring ring (14) is seated correctly!

