

INSTALLATION INSTRUCTION GRILLE GUARD FOR TOYOTA SIENNA 2010 ITEM NO: 15TY918SS


(ATTENTION)


- 1. Please read this installation instruction before installing this part. When install it, please pay attention to protecting your vehicles.
- 2. When you use it, please check this parts at a fix time-lapse, such as one month or two month.


(PARTS LIST)

No	Name	Photo	Qty	Remarks	No	Name	Photo	Qty	Remarks
A	Grille Guard		1	33	Н	Lock washer	0	8	M12
В	mount bracket1	E)	2	lateral symmetry	I	Hex Nut		•	M12
С	mount bracket2		2	lateral symmetry	Ј	″U″Bolt		2	M8X25 (52X40)
D	Hex Bolt		2	- M12X35 _	K	flat washer		4	M8
Е	Hex. Bolt		. 4	M12X30	L	Lock washer		싚	M8
F	M10"T" Hex Bolt	A Parties	2	M12X40	. М	Hex Nut		4	M8
G	flat washer		10	M12					

(INSTALLATION STEPS)





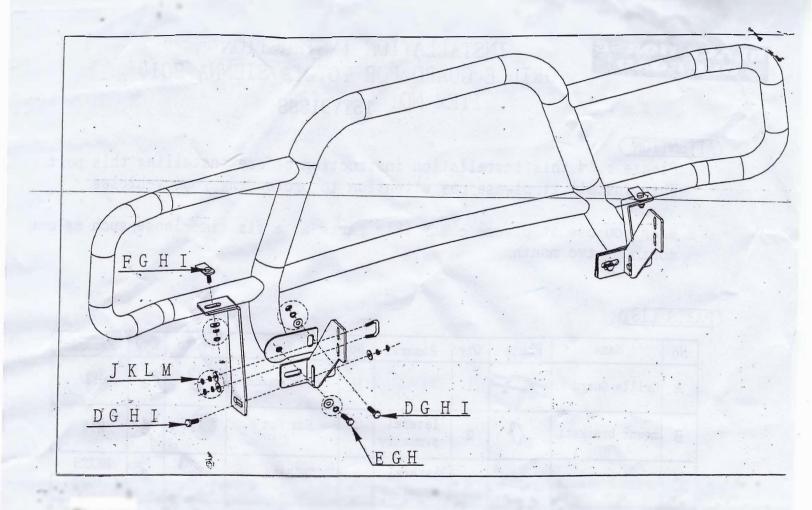

- STEP 1: Check the parts in the box carefully if match above parts list.
- STEP 2:Pls prepare the tools for installation, follow as:12-14wrench, 17-19wrench.
- STEP 3:Put the mount bracket B and the moun bracket C into the girder of the car, and tighten it M8"U" bolt L.
- STEP 4:Install the grille guard A on the mount bracket B, with M12x30 bolt E and then tighten it.
- STEP 5: Test and make sure that the grille guard is steadily fixed.
- STEP 6: Installation is finished.