



# **INSTALLATION INSTRUCTIONS**

**BEACON BULL BAR FOR NISSAN ROGUE 14-20**

**PART # BE-A1702S**

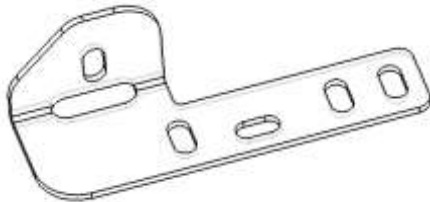
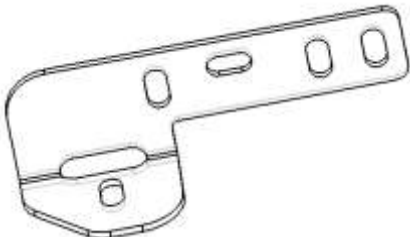




## Before Installation

- Please read this instruction before installation. Please pay attention to the surface of your car, improper installation may scratch it.
- All the pictures shown here are for your reference only and they may not match to the actual object, but the installation method is the same.

## Care and Cleaning

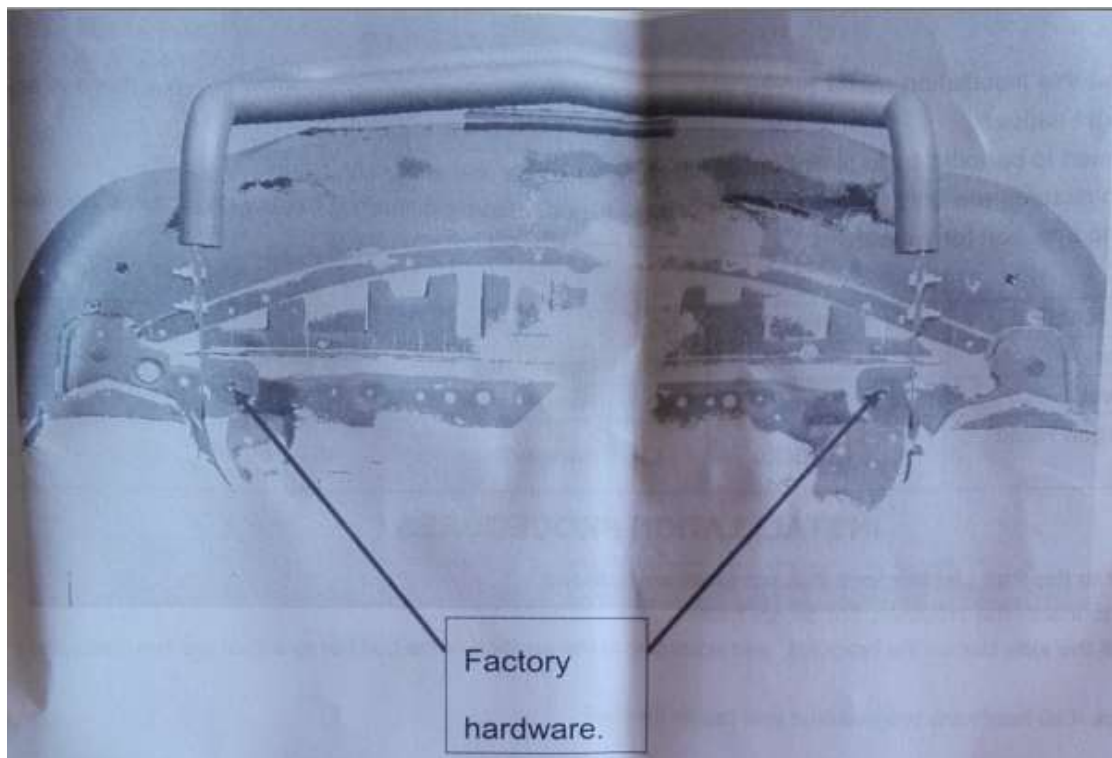
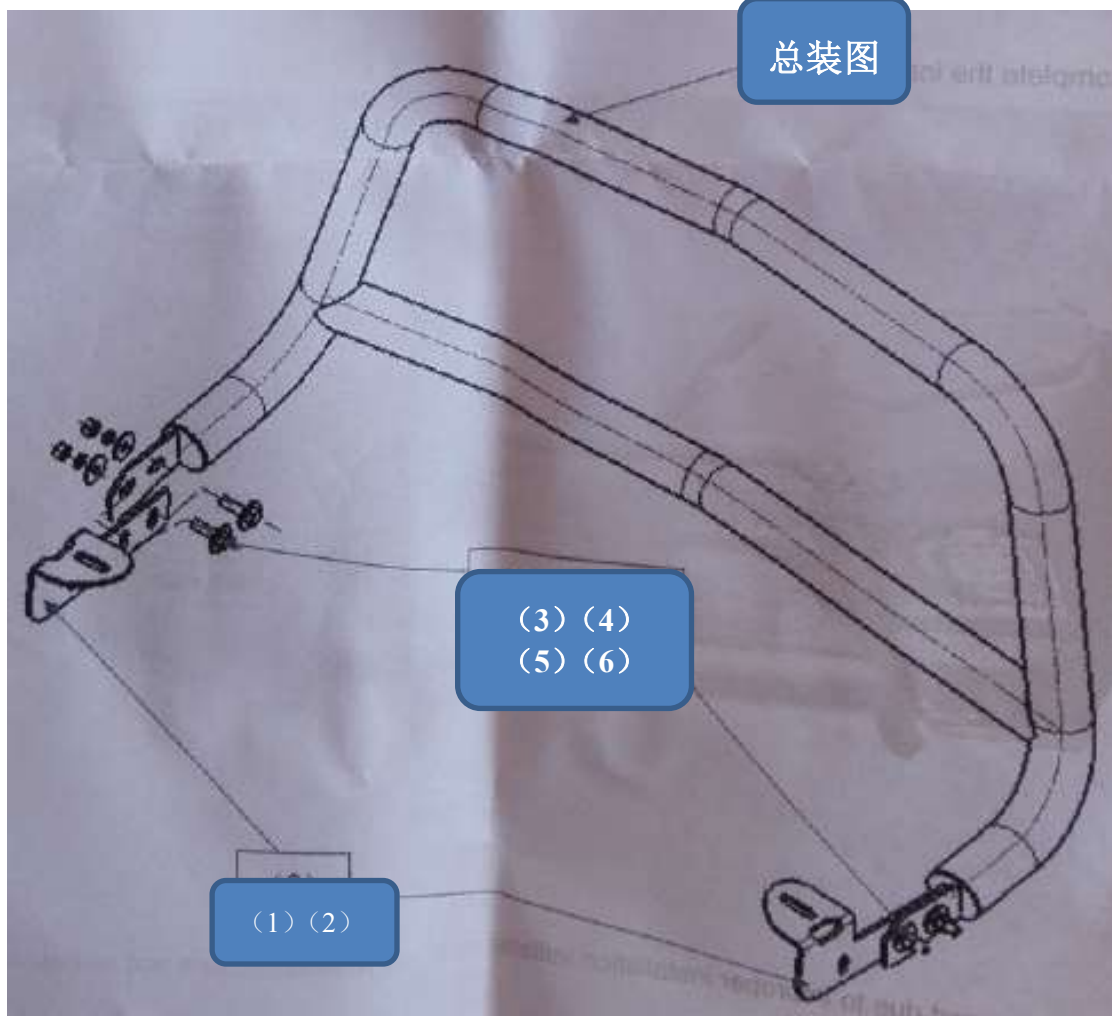
- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

## Parts List

NO.	QTY	PIC	NO.	QTY	PIC
①	1	 Left Mounting Bracket	②	1	 Right Mounting Bracket
③	4	 Hex Bolt M12_35	④	8	 Flat Washer D12
⑤	4	 Spring Washer D12	⑥	4	 Hex Nut M12

## Installation Steps

### Installation Picture



Step 1.: As shown in the above picture, please find the position for installation on the original car. Unscrew the bolt, and then fasten the screws of the left and right mounting brackets. Connect the grille guard according to the installation picture.

Step 2: Installation completed.



Step3: Please check whether all the screws were fully tightened.

## NOTE

Any damages and losses caused by improper installation and application are beyond our quality warranty.