




JK Model Gun & Bow Rack
INSTALLATION INSTRUCTIONS

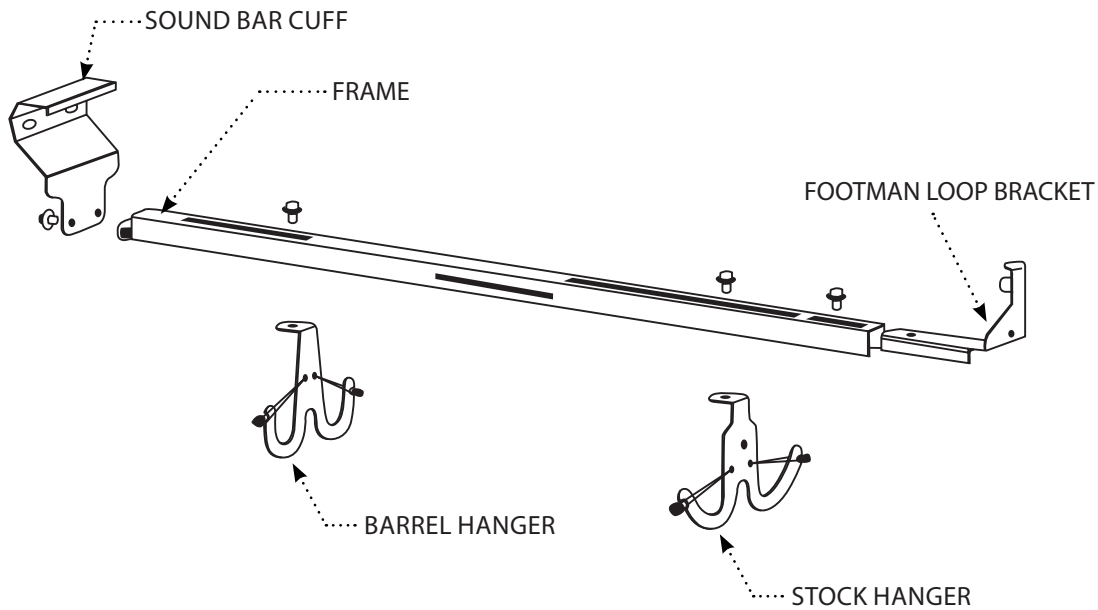

READ INSTALLATION INSTRUCTIONS ENTIRELY PRIOR TO INSTALLING PRODUCT

FOLLOW STEPS BELOW:

1) Install SOUND BAR CUFF over the SOUND BAR:

- Center the Sound Bar Cuff over the sound bar.
- Attach the Sound Bar Cuff to the sound bar by 'hooking' the top lip of the Sound Bar Cuff to the top of the sound bar.
- Pull the Sound Bar Cuff downward until it rests firmly against the sound bar.
(The Sound Bar Cuff is contoured to match the shape of the factory installed sound bar).

2) Install FOOTMAN LOOP BRACKET:

- Place black rubber protective tubing over the Jeep's Footman Loop.
- Attach the Footman Loop Bracket over the Footman Loop.

3) Install the FRAME:

- Using two (2) 1/2" bolts with lock washers, secure frame to the Sound Bar Cuff.
- Using one (1) 3/4" bolt with lock washer, secure the opposite end of the frame to the Footman Loop Bracket.

4) Install BARREL & STOCK HANGER:

- Barrel Hanger installs in the rear frame slot, closest to the roll bar, using two (2) 3/4" bolts with lock washers.
- Stock Hanger installs in the middle frame slot using two (2) 3/4" bolts with lock washers.

**Both hangers are adjustable, front to rear, in order to fit a wide range of firearms.*

NEVER CARRY A LOADED FIREARM IN THE BLACK MOUNTAIN GUN & BOW RACK