

IMPORTANT NOTE

PLEASE READ INSTRUCTIONS COMPLETELY BEFORE USING THIS DEVICE

MOUNTING AND REMOVAL



A

Insert the mount into your cup holder. Turn the adjustment knob counter clockwise to expand the bottom of the mount securing it to your cup holder. Do not overtighten.

360° Rotating Head

Fully Bendable Neck


Expansion Knob



To mount the XL Grip-iT to the Cup Holder Mount, slide the T-notch connector on to the XL Grip-it mounting plate. Press down to lock & secure in place.

To remove the XL Grip-iT, pull back on the release tab and pull the mount from the post.

Rotate XL Grip-iT 360° for portrait or landscape viewing angles.

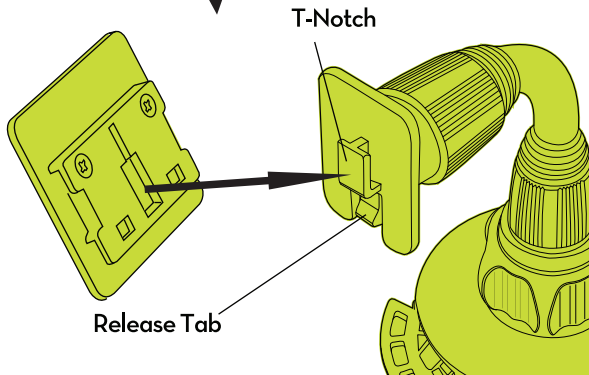


B

GRIP-iT XL ADJUSTMENT

Turn the Expansion Wheel to open the XL Grip-iT arms. Insert your device and squeeze the arm back together to secure your device.

Inaccessible GPS power ports can be reached by rotating Grip-iT XL 90 degrees and reinserting the device.

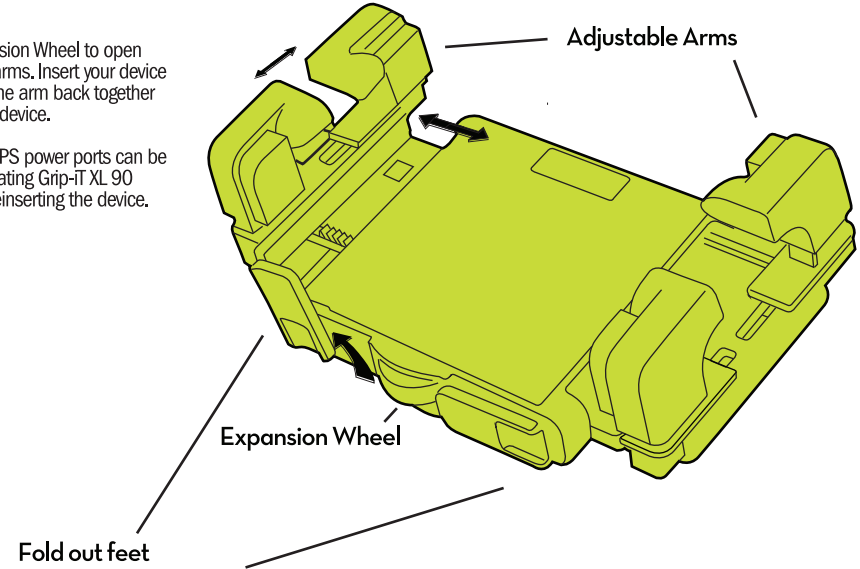

C

OVERVIEW

