


07-10 Jeep JK Grille Installation Instructions

Parts list: 1 grille, 2 - 15" brackets, 4 - 8/32 x 1/2" screws, 4 - 8/32 nylon lock nuts.

Step 1 – Remove front shell. Open the hood, remove rubber clips on top of shell, pull shell out enough to insert a flat screw driver, remove bottom clips, and signal lights.

Step 2 – Align Grille to Shell. Put the shell face down on a protected surface. Place the grille face down on shell. **IMPORTANT** – for proper fit place the top of the grille (marked with sticker) toward the top of the shell. Align the raised sections of grille with the 7 shell openings.

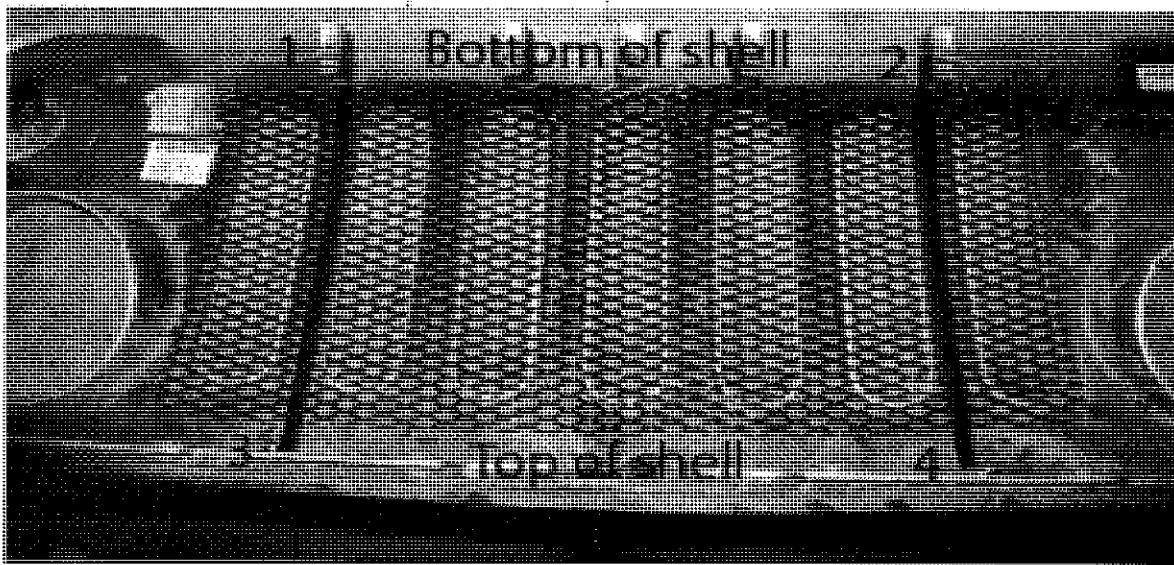

Step 3 – Attach brackets. Align the brackets as seen in picture above, apply pressure to bottom of bracket and drill a 3/16" hole (see figure 1), attach screw and lock nut – do not over tighten. Repeat steps for second bracket at figure 2. Apply pressure to top of bracket – figure 3 (enough to firmly seat the grill into shell), drill 3/16" hole, insert screw with lock nut on top of shell. Repeat for figure 4. Be sure to tighten all lock nuts.



Step 4 – Reinstall shell with grille attached. Reattach signal lights, align grille shell with holes and reinsert the rubber clips.

We hope you enjoy your new grille!!