




BC0043-2

Engine: **8620 STEEL HONDA K20A2/Z3 IVTEC**

	INT	EXH
Advertised Duration:	314°	300°
Duration @ .050" (Lobe):	250°	244°
Duration @ .050" (Valve):	268°	262°
Valve Lift (inches):	.525"	.518"
Valve Lift (mm):	13.34	13.15
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring/Retainer Kit: **BC0040**

Check piston to valve when going max (50°) camshaft advance

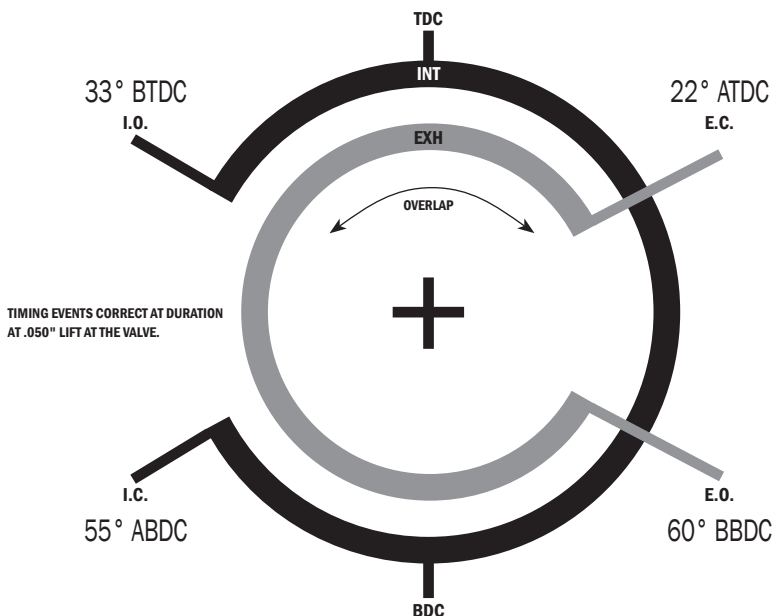

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.